


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.		OTHERWISE SPECIFIED					
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	13 JAN 70				
A		REV PER CEMN	11 MAR 70	930			
		.093 DIA 4 HOLES ADDED					

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
3	1	NT10002	FASTENER MIN.	

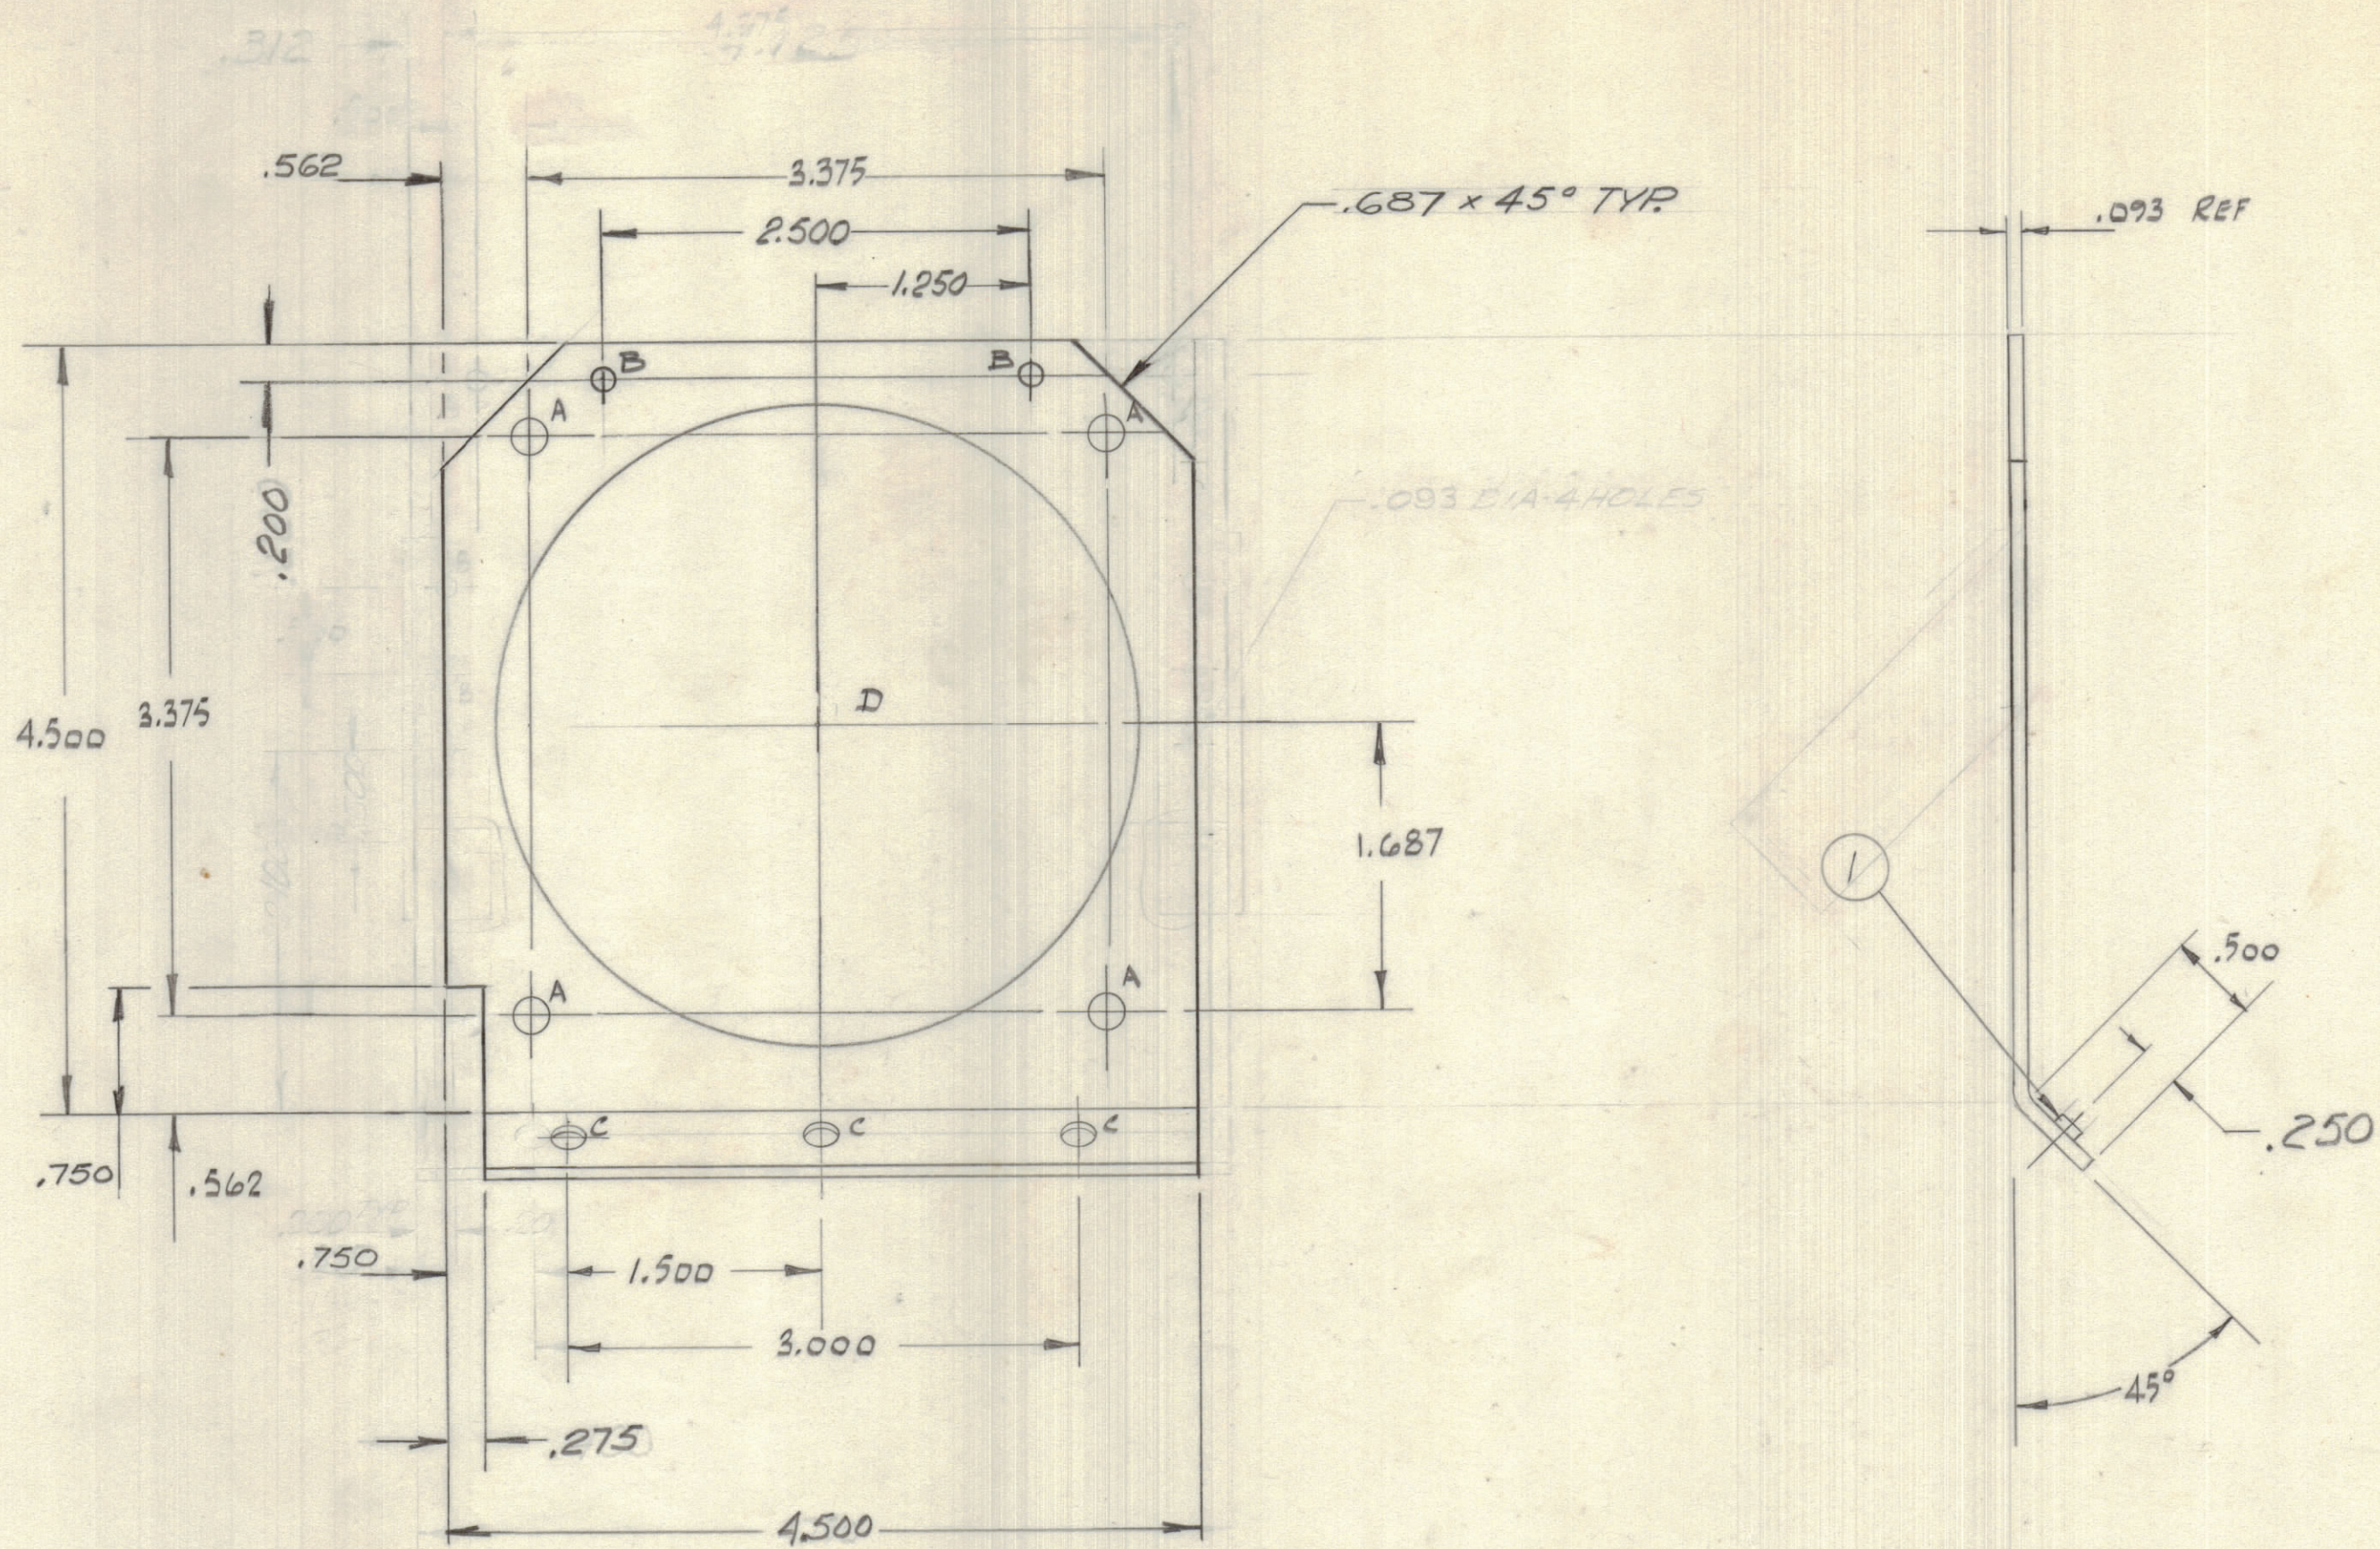

MS 11242 A

HOLE DATA		
REF.	DESCRIPTION	REQD
A	.196 DIA	4
B	.140 DIA	2
C	.172/.175 DIA	3
D	3.750 DIA	1

.093		TMC (Canada) LIMITED	
STOCK SIZE		OTTAWA ONTARIO	
ALUM ALLOY		BRACKET	
MATERIAL	WEIGHT PER PC.		
575 H32		PROCTOR	
TYPE & TEMPER		DRAWN	ELEC. DES. APP.
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
IRIDITE S404			
FINISH & SPEC. NO.			

TOLERANCES		SCALE: / = /
ALL OTHERS	DEC. DIM. ± .XX*.08 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

DCB-1	112/70	24 Aug 70
MODEL	PROJECT NO.	DATE