


MS11261 B

REV	ITEM	PART NO.	DESCRIPTION	SYMBOL
4	1	NT129-832-4	NUT, ROUND	A
4	2	NT129-632-4	NUT, ROUND	D
3	3	NT129-1032-4	NUT, ROUND	E

ISSUE	ITEM	CHANGED FROM	DATE	CN NO.	DRAFTS	CHECKER	ENG APP.
Ø		PROD. RELEASE	3/11/70				
A		REVISED PER CEMN	JAN 71	809			
B		CHANGE DIMS. FROM DEC. TO FRAC. & UPDATED 2 REV.	10-28-80	22015			

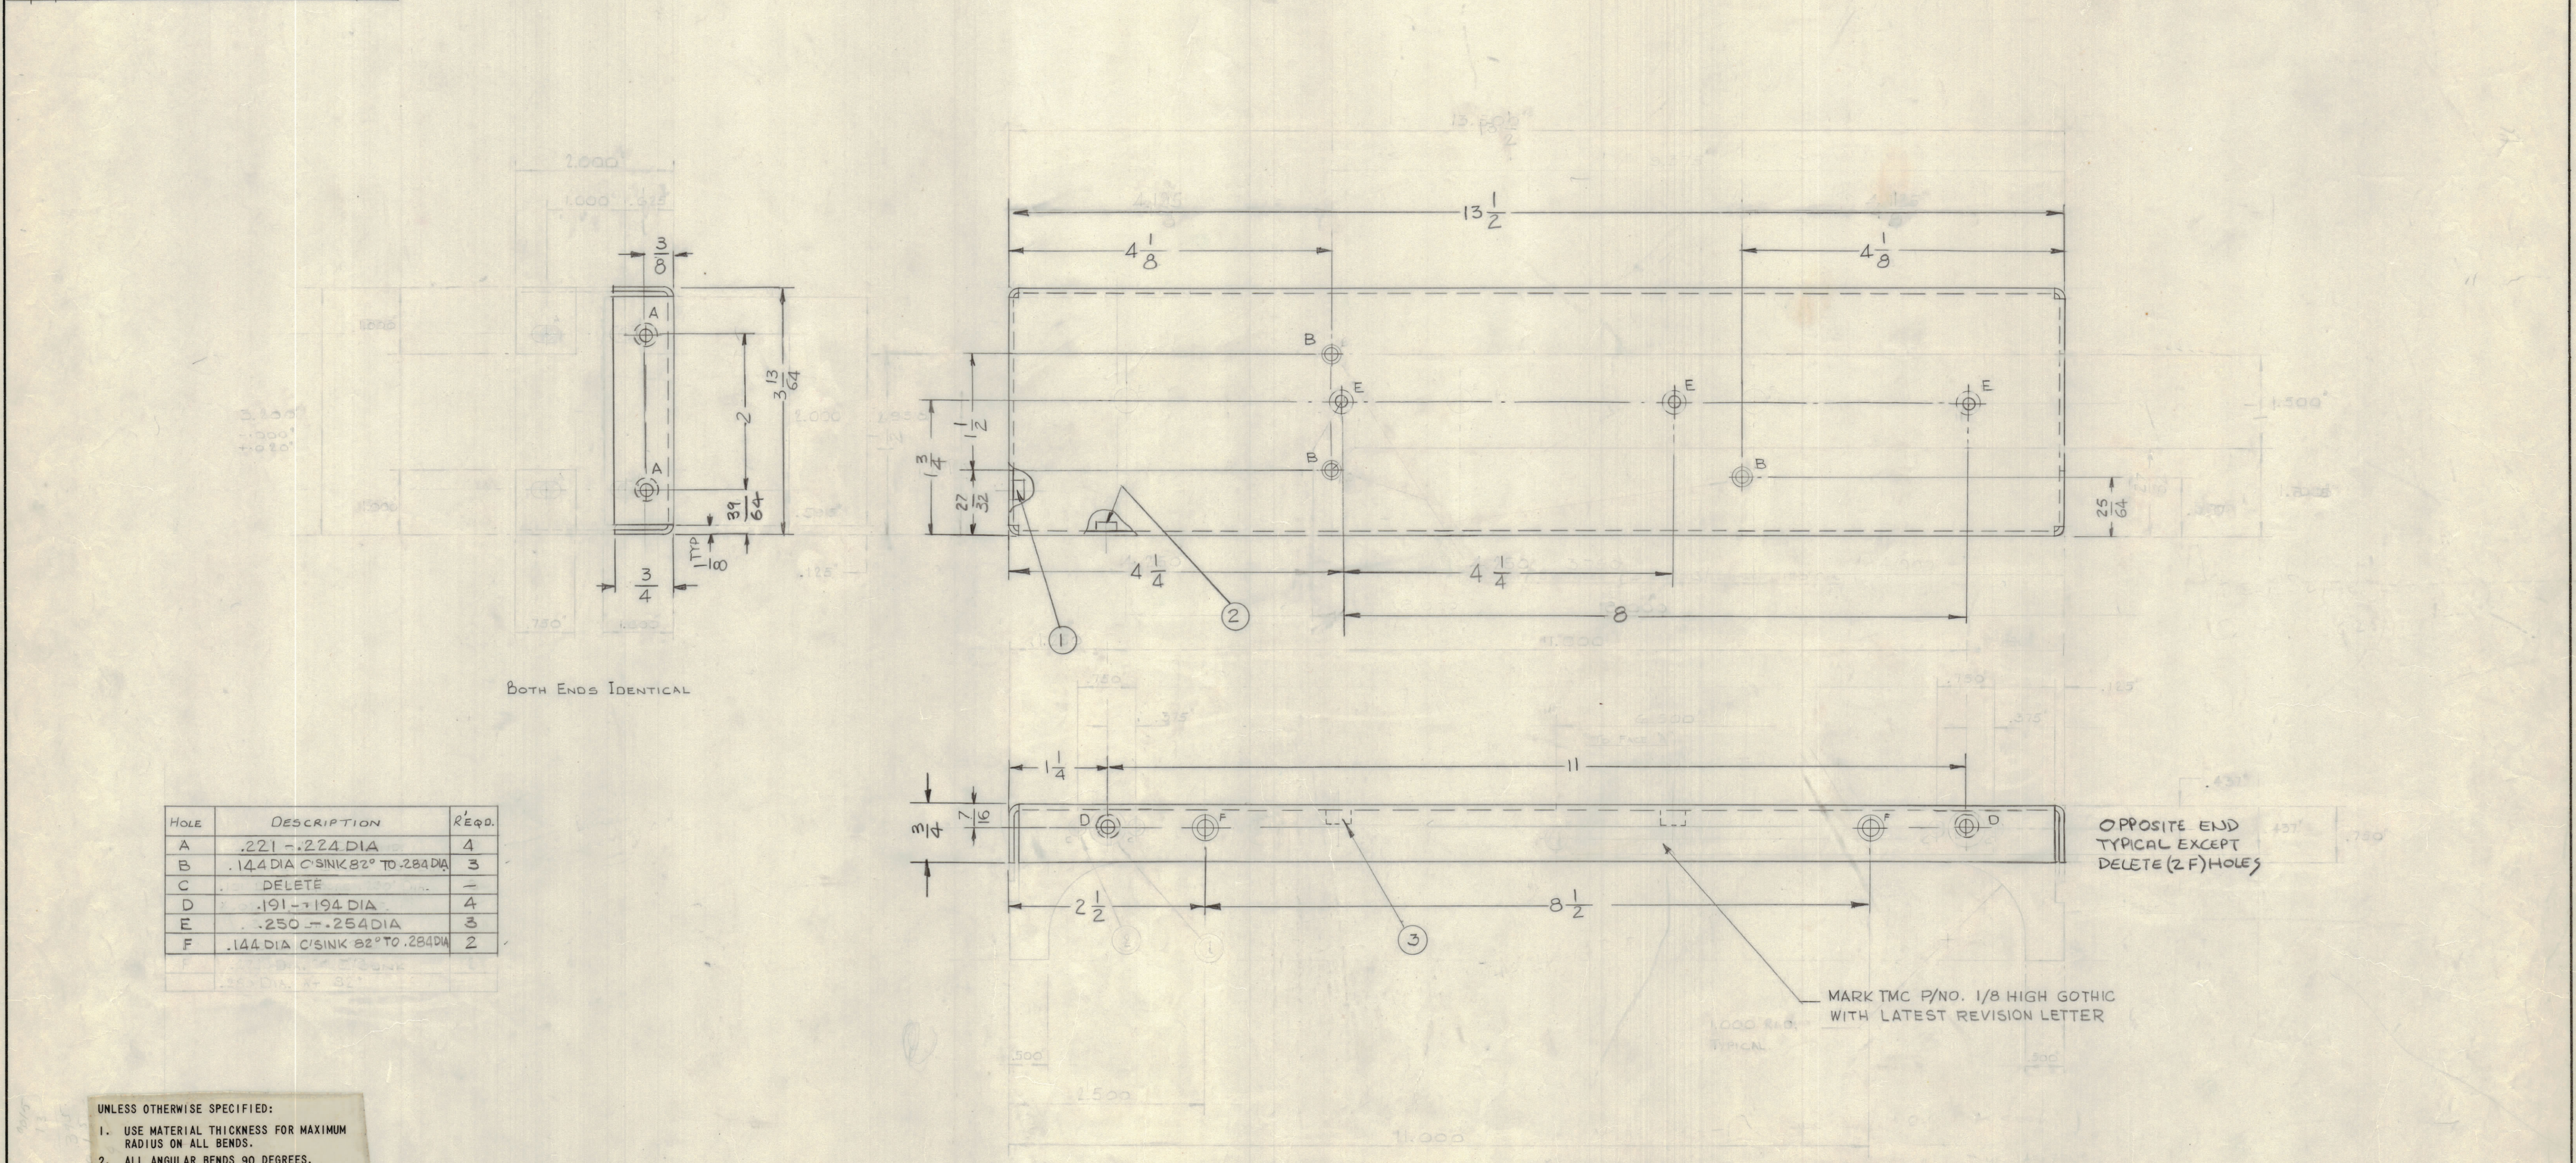

HOLE	DESCRIPTION	REQD.
A	.221-.224 DIA	4
B	.144 DIA C/SINK 82° TO .284 DIA	3
C	DELETE	-
D	.191-.194 DIA	4
E	.250-.254 DIA	3
F	.144 DIA C/SINK 82° TO .284 DIA	2

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
 2. ALL ANGULAR BENDS 90 DEGREES.
 3. REMOVE ALL BURRS AND SHARP EDGES.
 4. MOUNT INSERTS AFTER FINISHING.

NOTE:
 MS 11261-1 SIDE PANEL L.H. AS ABOVE BUT OPPOSITE HAND
 MS 11261-2 SIDE PANEL R.H. AS DRAWN.

TOLERANCES UNLESS OTHERWISE SPECIFIED	SCALE: FULL SIZE
ALL DEC DIM ± .015 OTHERS ANGULAR DIM ± 0° 30'	DRILL PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED

V.M.C.8	08471	11TH OCT 1970
MODEL	PROJECT NO.	DATE
	ASSY NO.	

.081 STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
AL. ALLOY.		SIDE PANEL	
MATERIAL WEIGHT PER PC			
5052 H32		G.C.T.	
TYPE & TEMPER		DRAWN	
		ELEC. DES. APP.	
		MECH. DES. APP.	
HEAT TREAT SPEC.		CHECKED	
1R10ITE S404		FINAL APPROVAL	
FINISH & SPEC. NO.		MS11261 B	