IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
X		ENGINEERING RELEASE	13/11/70		G.C.T.	W.F.P.	

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

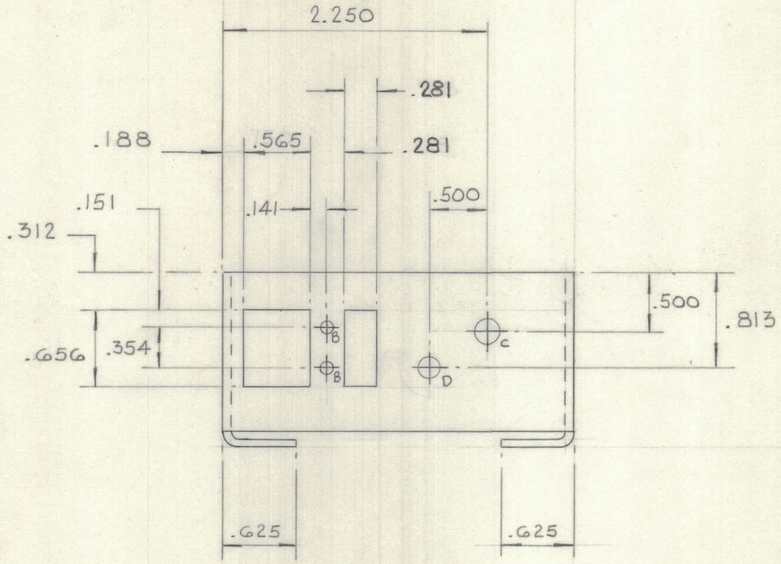

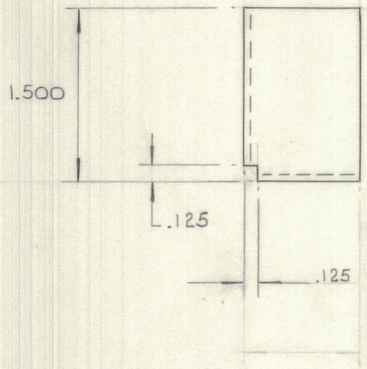

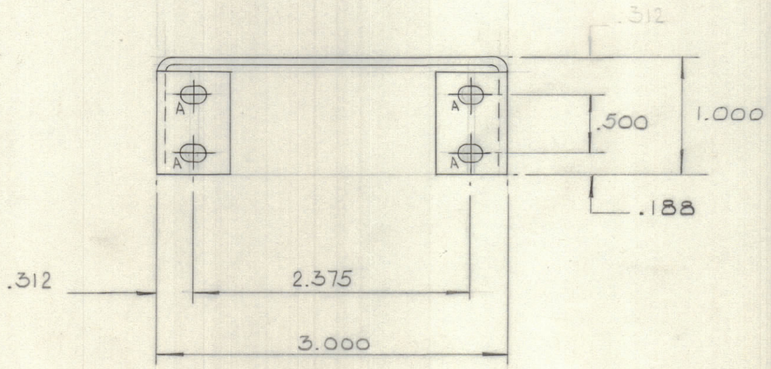

HOLE	DESCRIPTION	QUAN
A	.171 DIA.	4
B	.109 DIA	2
C	.228 DIA	1
D	.531 DIA.	1

INTERNAL BEND RAD. .062

MS11267 X

TOLERANCES			SCALE: FULL SIZE
ALL OTHERS	DEC. DIM. ± .015	.X=.05	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
	FRAC DIM. ± 1/64	.XX=.01	
	ANGULAR DIM. ± 0° 30'	.XXX=.008	

ATCU-160A	111/70	A0758	13 NOV '70
MODEL	PROJECT NO.	ASS'Y. NO.	DATE
USED ON			

.064	TMC (Canada) LIMITED OTTAWA ONTARIO	
STOCK SIZE		
ALL. ALLOY. / MATERIAL	BRACKET RELAY	WEIGHT PER PC.
545 H32 / TYPE & TEMPER	G.C.T. / DRAWN	ELEC. DES. APP. / MECH. DES. APP.
HEAT TREAT. SPEC.	CHECKED	FINAL APPROVAL
IRIDITE S404 / FINISH & SPEC. NO.	MS11267	X

FORM—129