



REQ. PER UNIT	USED ON			MS-1240	A
	MODEL	ASS'Y. NO.	DATE		
2	RFA-1		5-12-58		

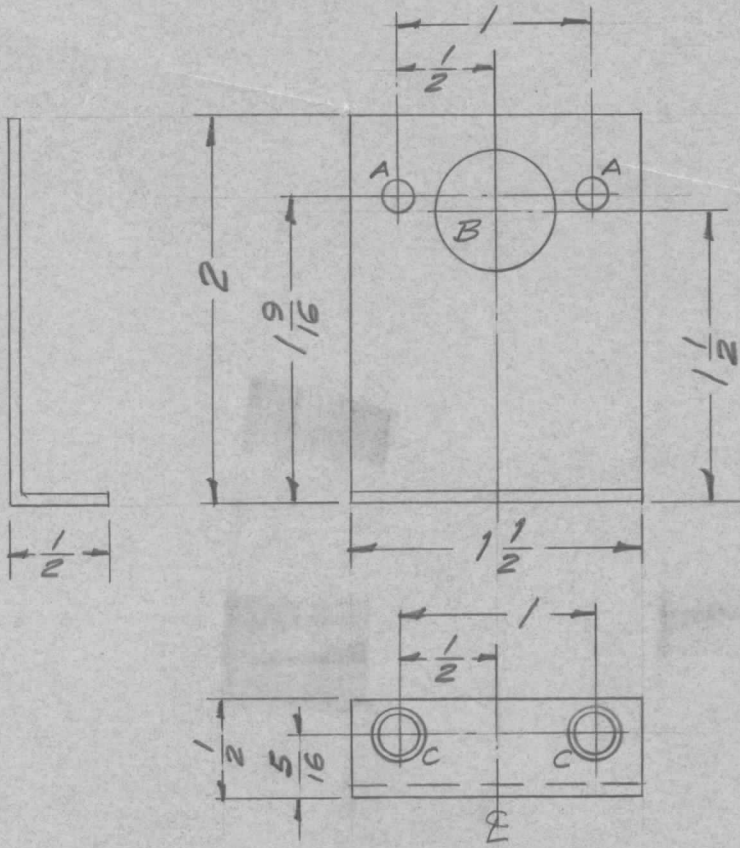

A - 1/64 (.171) D. 2 Req.

B - 5/8 (.625) D. 1 Req.

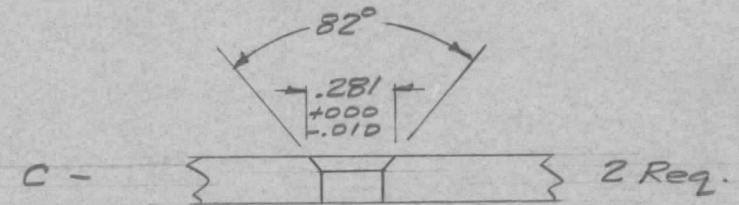

Mount SM-III-D-206 in "C" Holes as shown.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		.064 THK.	THE TECHNICAL MATERIEL CORP.				
		STOCK SIZE	MAMARONECK. NEW YORK				
		ALUMINUM	BRACKET, CAPACITOR MTG.				
		MATERIAL					
A	1	5404 - YEL-IRIDITE WAS 12-B 5101 - CAUSTIC DIP 59	1001	P	EMN		
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: FULL				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
FRAC. DIM. ± 1/64			REMOVE ALL BURRS AND SHARP EDGES				
ANGULAR DIM. ±							
5052-H32		— H —		16 ⁵ /12/58	Jase	o/mo	
TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN	CHECKED	FINAL APPROVAL	
S404 - YEL-IRIDITE				RFB		MS-1240	A
FINISH & SPEC. NO.				ELEC. DES. APP.		MECH. DES. APP.	