


REQ. PER UNIT	USED ON			MS-1244	B
	MODEL	ASS'Y. NO.	DATE		
1	RFA-1		5-12-58		

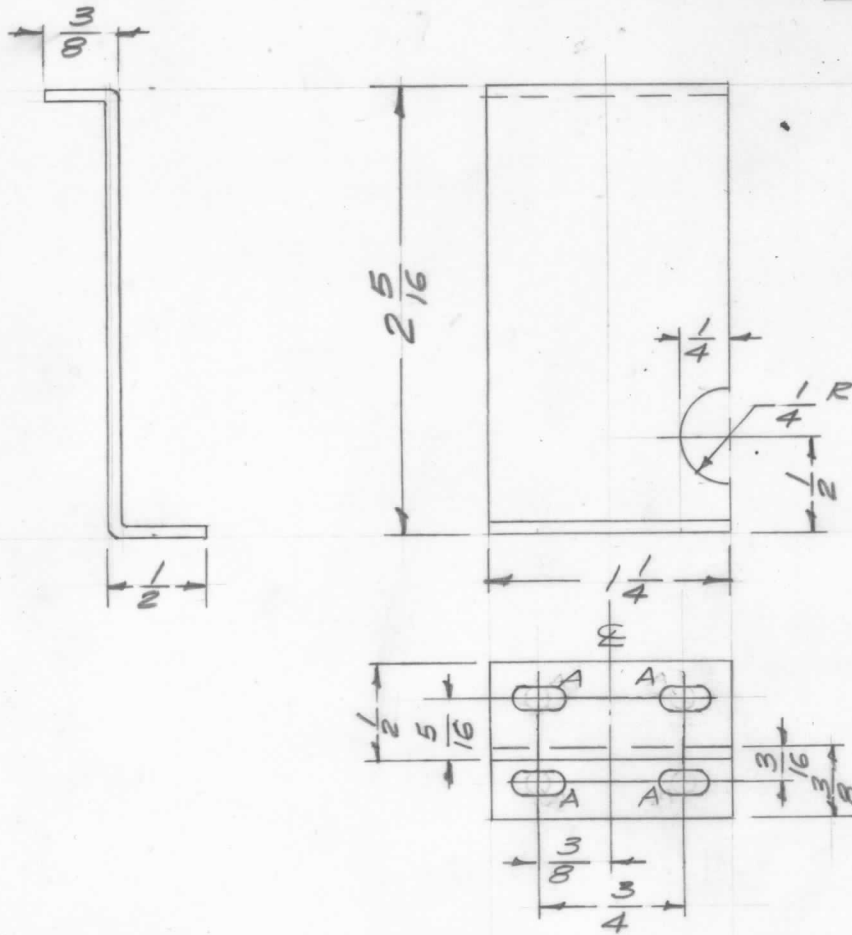

A - 1/8 x 1/4 Slot 4 Req.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL		
										THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
B	1	S404-YEL-IRIDITE S101-CAUSTIC DIP	12-8 59	1001	P		EMN	.064 THK.					
A	1	"A" Holes Were 1/8 D.	7/1/58	404	16	file	dm	ALUMINUM		BRACKET, CONNECTOR MTG,			
TOLERANCES								SCALE: FULL					
DEC. DIM. ±								MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.					
FRAC. DIM. ± 1/64								REMOVE ALL BURRS AND SHARP EDGES					
ANGULAR DIM. ±													
								5052-H32	A	16 5/12/58	file	dm	
								TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
								S404-YEL-IRIDITE			RFB	MS-1244	B
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			