


REQ. PER UNIT	USED ON			MS-1256	B
	MODEL	ASS'Y. NO.	DATE		
1	RFA-1		5-12-58		

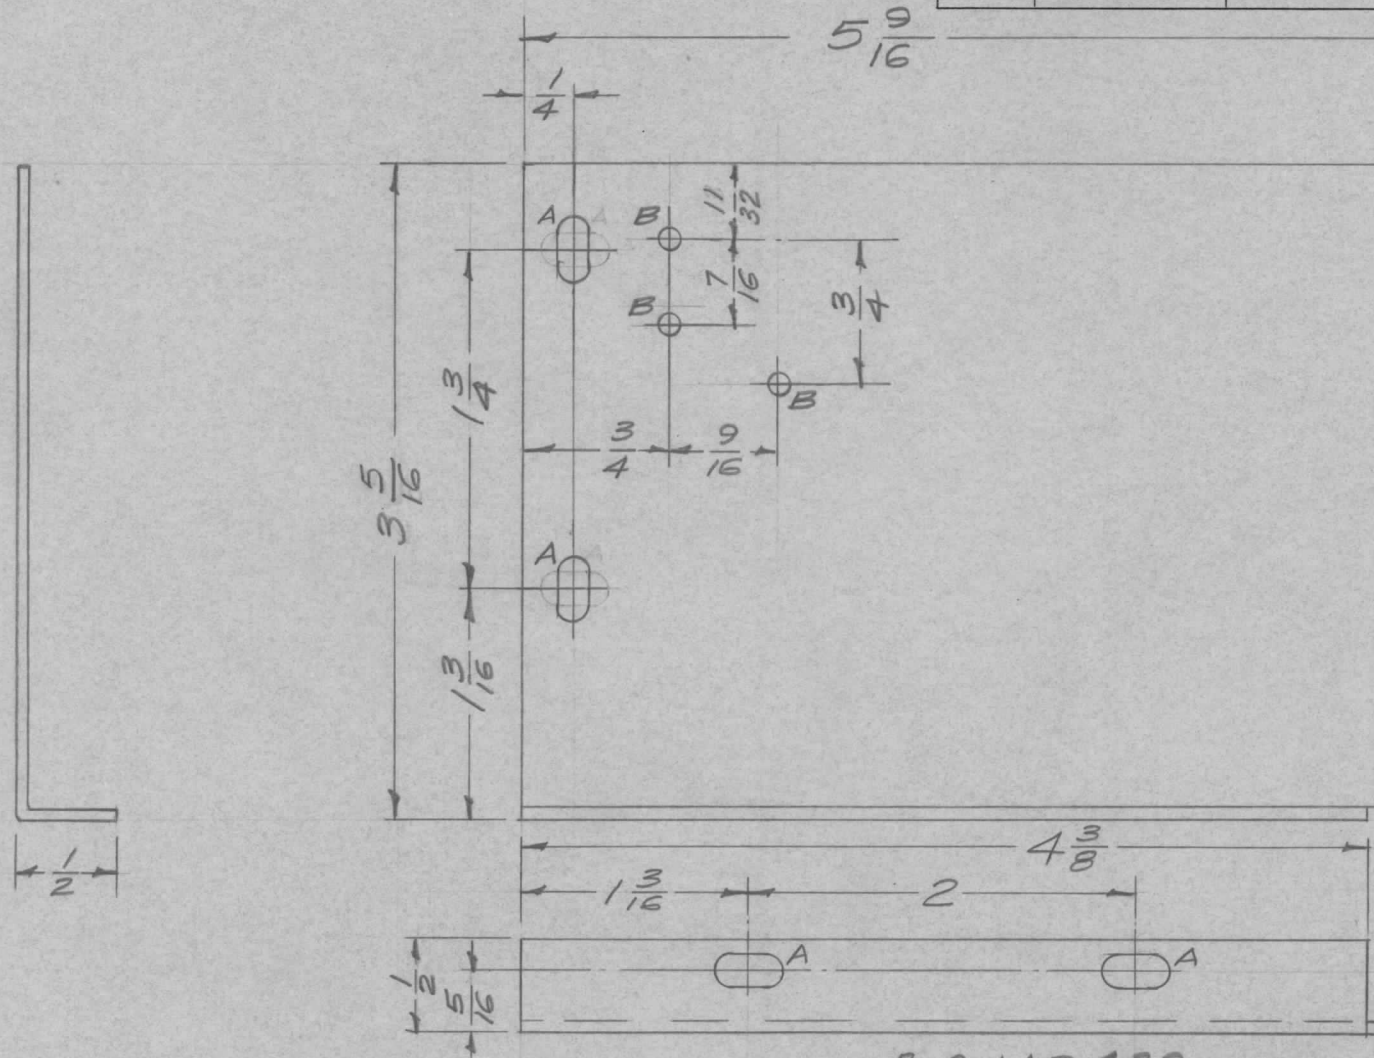

A - 1/64 x 1/32 SLOT 4 Req.
 B - 1/8 (.125) D. 3 Req.

Ref-1 LD-429

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
B 1	5404-Y-IRIDITE WAS 5101 CAUSTIC DIP	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
A 1	3-5/16 DIA WAS 3-3/8 1/32 WAS 13/32 TWO SLOTS TURNED 90°	SHIELD, FIL. TRANSFORMER	
ISSUE ITEM	CHANGED FROM	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
TOLERANCES		SCALE: FULL	
DEC. DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.	
FRAC. DIM. ± 1/64		REMOVE ALL BURRS AND SHARP EDGES	
ANGULAR DIM. ±			
MATERIAL		FINISH & SPEC. NO.	
5052-H32		— 11 —	
TYPE & TEMPER		HEAT TREAT. SPEC.	
5404-YEL IRIDITE			
DRAWN		CHECKED	
5/12/58		Hoe	
ELEC. DES. APP.		MECH. DES. APP.	
		2FB	
		MS-1256	
		B	