


REQ. PER UNIT	USED ON		MS-1285 C
	MODEL	ASS'Y. NO.	
2	ATS-70 CU		6/19/58
2	ATS-70 CU-2		4/23/59

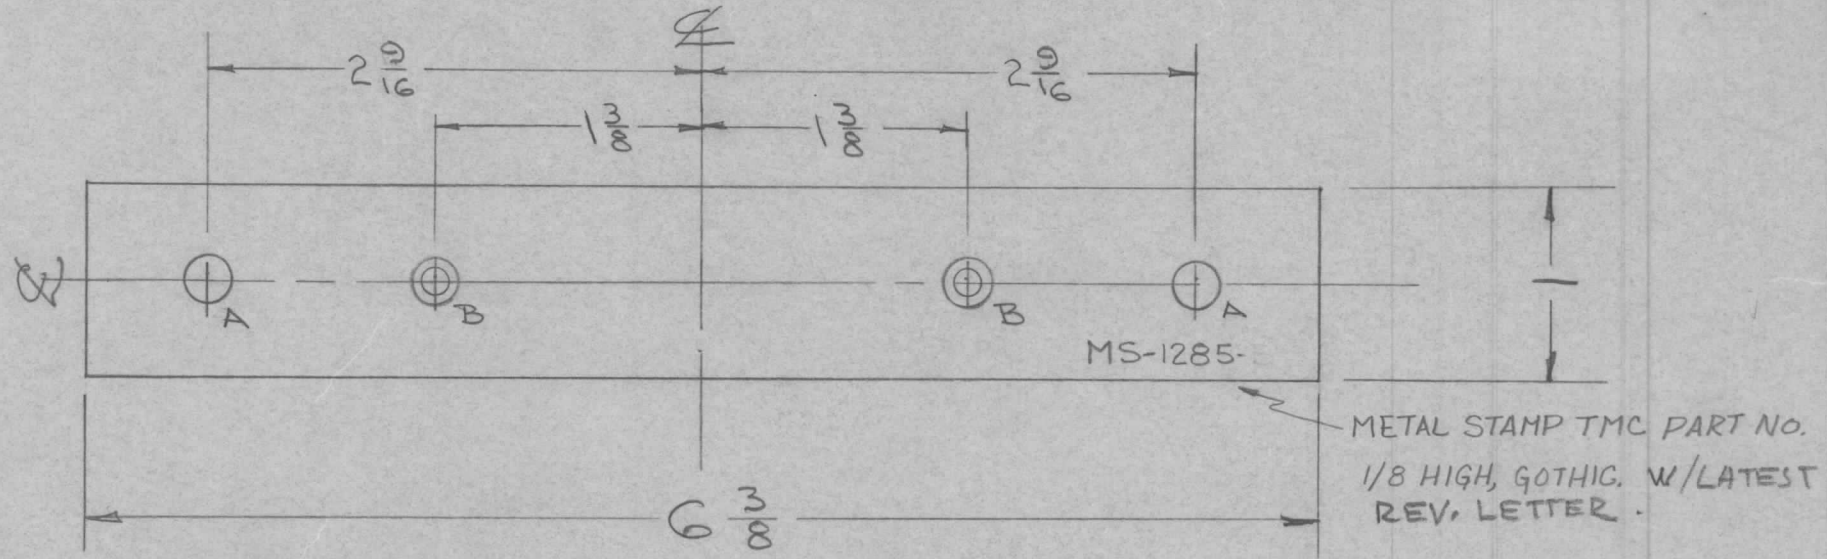

A - 1/4 (.250) DIA 2 REQ.
 B - .169 DIA. C'SINK 82° TO .337 DIA 2 REQ

FINISH NOTES:
 S-404 YELLOW TRIDITE
 S-114 ZINC CHROMATE PRIMER
 S-115 SMOOTH GRAY ENAMEL

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
C		B HOLE WAS DR. EC SHK FOR B.F.H.S	
B	2	TYPE & TEMPER WAS 5052-H32	
	1	STOCK SIZE WAS 1/8 THK	
A	1	FINISH S404 WAS S101	
ISSUE	ITEM	CHANGED FROM	DATE CH. NO. DRAFTS CHECKER ENG. APP.
TOLERANCES		SCALE: FULL	
DEC. DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.	
FRAC. DIM. ± 1/64		REMOVE ALL BURRS AND SHARP EDGES	
ANGULAR DIM. ±			
6063-T5		ALUMINUM	
1/8" x 1"		STOCK SIZE	
THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK		BRACKET, MOUNTING	
6063-T5		ALUMINUM	
1/8" x 1"		STOCK SIZE	
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN
SEE NOTE			CHECKED
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
			MS-1285 C