REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS 1286	C
2	SWR-3000CU		6-19-58		

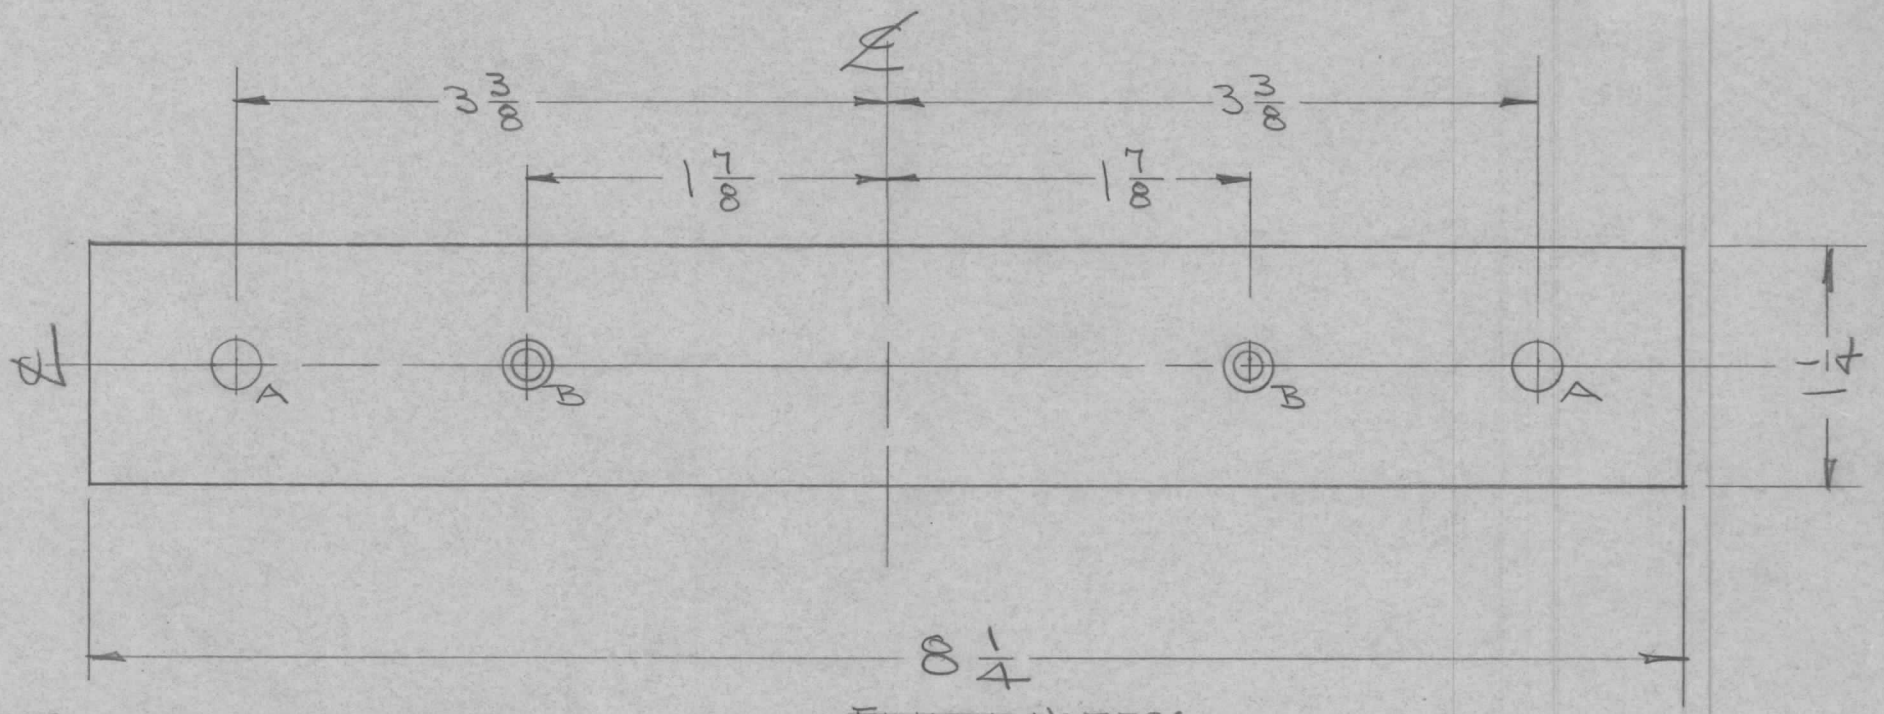

A- 1/4 (.250) DIA 2 REQ

B-.169 DIA. C'SINK 82° TO .337 DIA. 2 REQ.

FINISH NOTES:
S409 YEL-IRIDITE
S-114 ZINC CHROMATE PRIMER
S520 BLUE GRAY TEXTURED VINYL.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C		B HOLE WAS DRILL & C'SNK FOR 8 F.H.S	10-7-66	17007	C.D.L		LB
B		S220 REPLACED BY S520 (FINISH)	10/5/65	14932	[illegible]		
A	1	S404 - IRIDITE WAS S101 - CAUSTIC DIP	12-8-59	1001	[illegible]		EMN

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		1/8 THICK	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
STOCK SIZE			BRACKET, MOUNTING SWR-3000 CU	
MATERIAL		ALUMINUM		
5052-H32				
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
SEE NOTES		[illegible]		MS-1286 C
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE: FULL

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

FORM 108-A