


REQ. PER UNIT	USED ON			MS-1352	C
	MODEL	ASS'Y. NO.	DATE		
1	CAB-7		10-8-58		

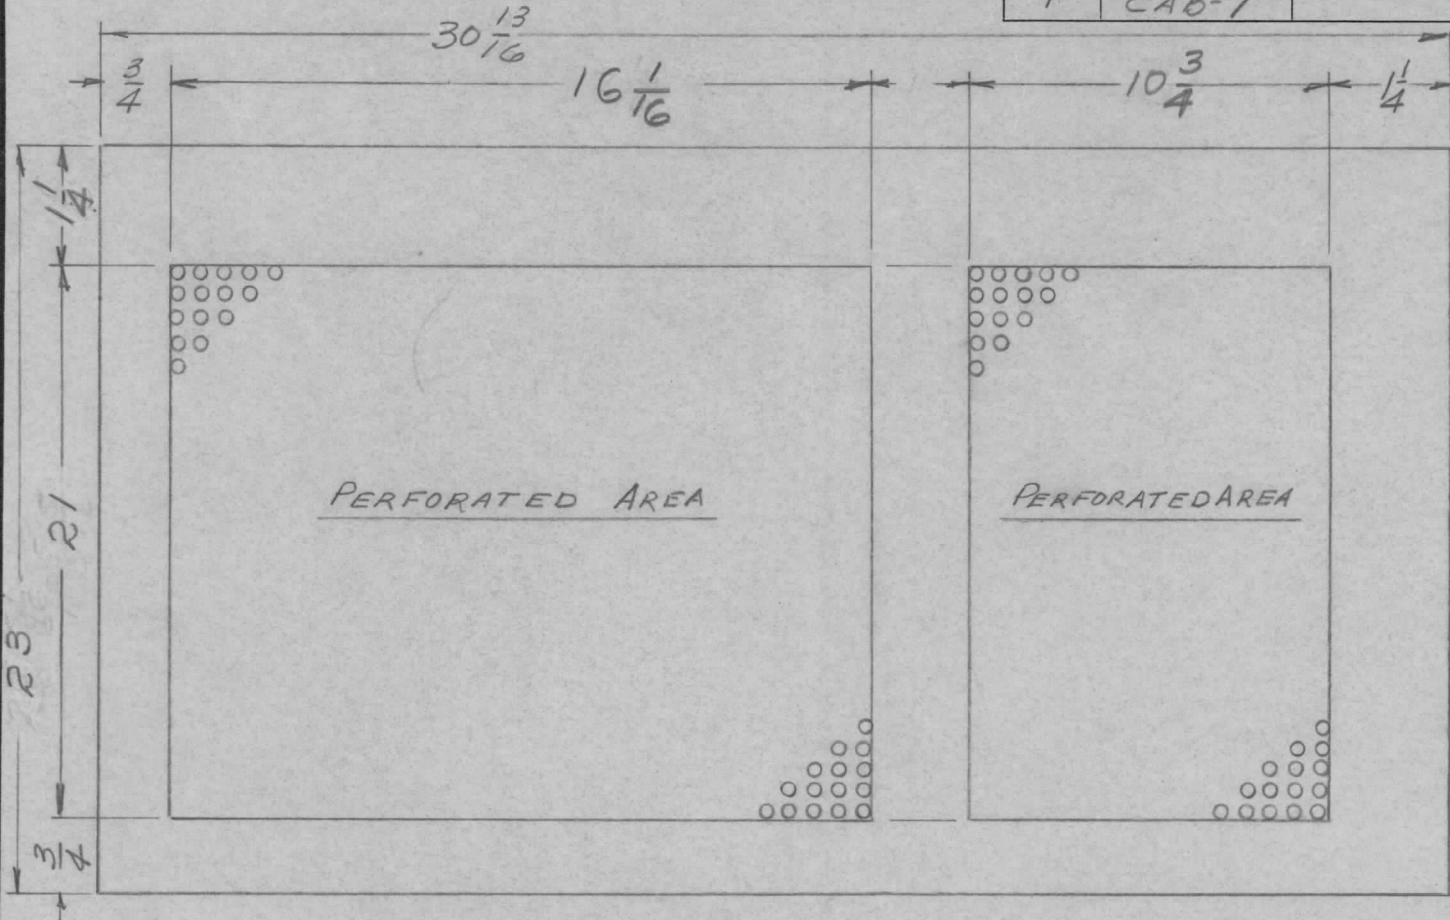

PERFORATION:
 .150 DIA. HOLES
 ON $\frac{3}{16}$ CENTERS
 (33 HOLES PER SQ. IN.)

REF.: (8) MS-1353 (R.F. SHIELD)

C	1	S404-IRIDITE WAS S/DI CAUSTIC DIP	12-8 59	1001	P	EMM	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
B	1	COMPLETE REVISION	9/1/59	1042	LOC	V6	.064 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
A	1	19 5/16 was 19 5/8 16 5/16 was 17 1/16 21 5/16 was 21 5/8	1/6/59	653	JLR		STOCK SIZE			BLANK SIZE, R.F. SHIELD	
							ALUMINUM				
ISSUE ITEM		CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL			
TOLERANCES			SCALE: <i>1/4" = 1"</i>				5052-H32	10-9-58 EMM		<i>EMM</i>	
DEC. DIM. ± FRAC. DIM. ± 1/64 ANGULAR DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
						S404-YEL. IRIDITE			<i>RFB</i>	MS-1352	
						FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		C	