


REQ. PER UNIT	USED ON			MS-1384	C
	MODEL	ASS'Y. NO.	DATE		
1	RTP-2		10-16-58		

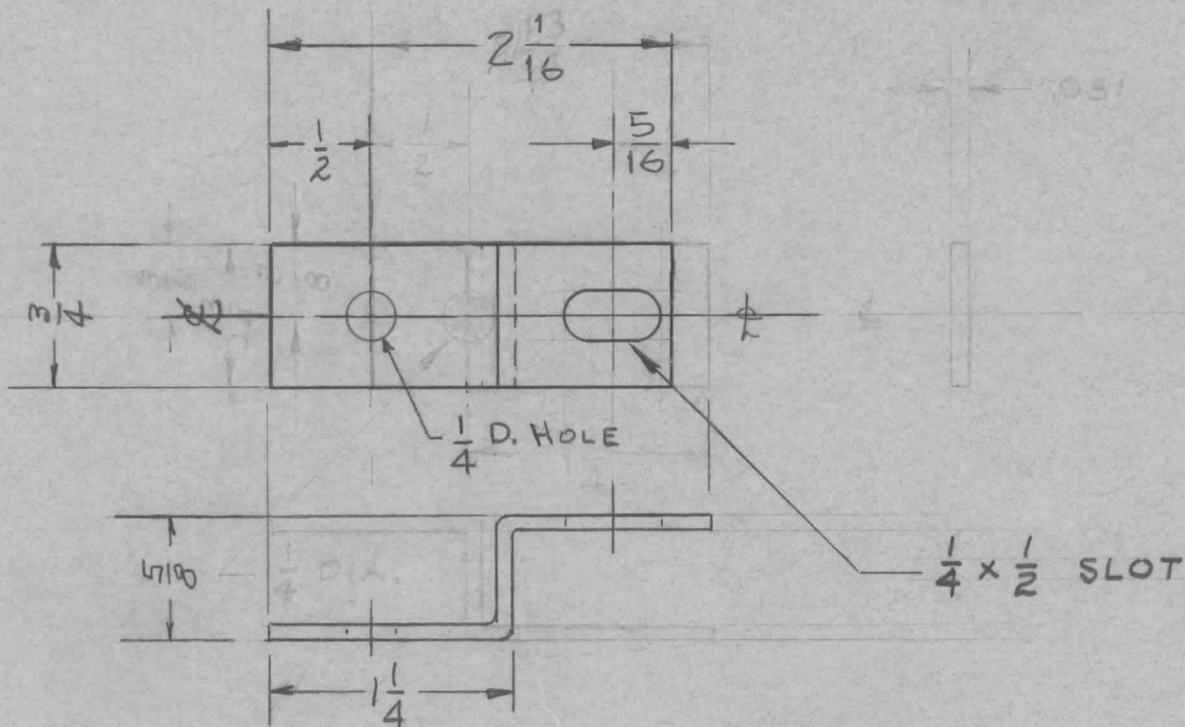

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
C 1	S404 YEL IRIDITE WAS 5/01 CAUSTIC DIP	12-8 59	1001 P ENN
B 1	5/16" DIM WAS 1/2"	5/16/59	1021 J.C.B. K P/B
A 1	PC REDESIGNED	1/6/59	are HJ AN
ISSUE ITEM	CHANGED FROM	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
TOLERANCES		SCALE: 1/16	
DEC. DIM. \pm		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.	
FRAC. DIM. \pm		REMOVE ALL BURRS AND SHARP EDGES	
ANGULAR DIM. \pm		1/64	
.001		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
STOCK SIZE		GUARD, MO BY PASS SWITCH	
ALUMINUM		RTP-2	
MATERIAL		5052-H32	
TYPE & TEMPER		DRAWN Tobin	
HEAT TREAT. SPEC.		CHECKED W.C.	
FINISH & SPEC. NO.		FINAL APPROVAL AN	
S404 YEL IRIDITE		RFB	
ELEC. DES. APP.		MECH. DES. APP.	
		MS-1384 C	