



REQ. PER UNIT	USED ON			MS-1530 C
	MODEL	ASS'Y. NO.	DATE	
2	GPT-10K	RELAY PAN.	2-2-59	

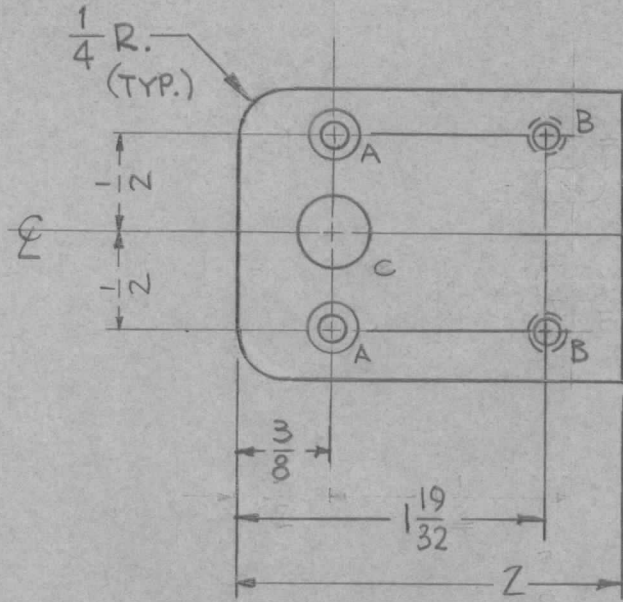

- A - DR. 120 DIA. C'SINK 82° TO .230 DIA. 2 REQ'D.
- B - DRILL & TAP FOR 10-32 2 "
- C - 1/2 (.500) DIA. 1 "

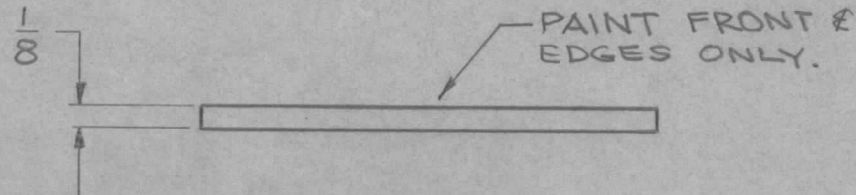

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL					
C		ADD. 1/4 R.	4-25-66	16152	HLA	<i>[Signature]</i>	<i>[Signature]</i>			178	THE TECHNICAL MATERIEL CORP.						
B		REV. COMPLETELY	2-2-66	15694	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>			STOCK SIZE	MAMARONECK, NEW YORK						
A	1	3/8 was 1/2 (1/2 was 1/4)	3/23/59		<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>			STEEL	CENTER MOUNTING BRKT						
										MATERIAL	RELAY PANEL / GPT-10K						
TOLERANCES								SCALE:									
DEC. DIM. ± FRAC. DIM. ± 1/64 ANGULAR DIM. ±								MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION: REMOVE ALL BURRS AND SHARP EDGES									
								TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL	
								S115 SMOOTH GREY ENAMEL				L.B		J.C. BIELE <i>[Signature]</i>		ARB <i>[Signature]</i>	
								FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		MS-1530 C			