
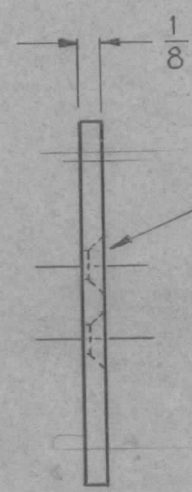


REQ. PER UNIT	USED ON		MS-1576 C
	MODEL	ASS'Y. NO.	
2	GPT 10K		2-18-59
1	AR-116	GPT-40K	2-4-60

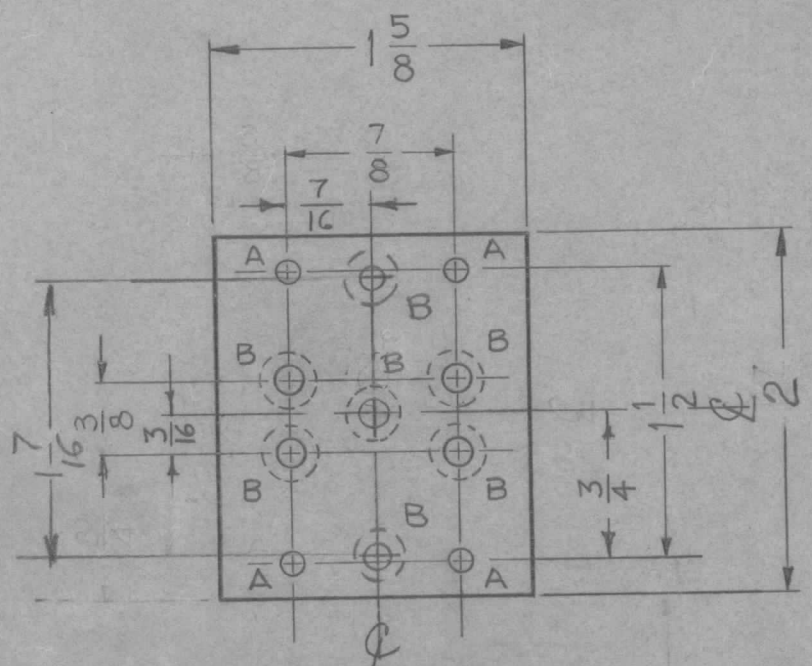


C'SK FROM REAR AS SHOWN

For Ref only

US MS 7073 WITH Replacement Relay RL201

A-#31 DR.(120) 4-REQ'D.

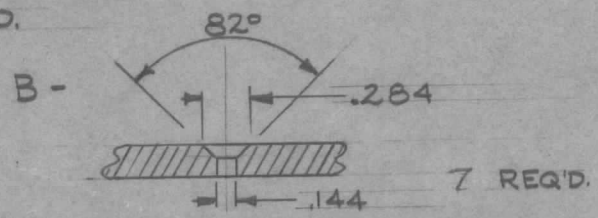

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		
DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30'

CUT HERE GUARANTEED 2-66

D	ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL				
			TWO 'B' HOLE ADD.								THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK PLATE, RELAY MOUNTING PA BIAS & IPA BIAS	MS-1576 C				
C	1		'B' HOLE QTY WAS 4	9-9-75	21289	<i>WRS</i>	<i>adch</i>	<i>ch</i>	1/8	STOCK SIZE						
B	1		(A) HOLE WAS #33 DR.(113)	7-5-62	6880	V.R.R.	<i>WRS</i>	<i>WRS</i>		ALUMINUM						
A	1		2" WAS 1 7/8	4-1-60	1983	<i>WRS</i>	<i>WRS</i>	<i>WRS</i>		MATERIAL						
									2024-T4	J.C. BIELE			<i>file</i>	<i>CRB</i>		
TOLERANCES				SCALE:				TYPE & TEMPER		HEATTREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL			
DEC. DIM. ±				MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION: REMOVE ALL BURRS AND SHARP EDGES				S-404 IRIDITE			<i>WRS</i>	<i>WRS</i>				
FRAC. DIM. ±								FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP					
ANGULAR DIM. ±																