


MS-1601	JMC. NO.	LEAF NO.	DIM. "A"	DIM. "B"	DIM. "C"
	MS-1601-1	1	2.063	.500	.187
	MS-1601-2	2	2.094	.500	.218
	MS-1601-3	3	2.125	.500	.250
	MS-1601-4	4	2.156	.500	.281
	MS-1601-5	5	2.187	.500	.312
	MS-1601-6	3.100	3.000	.500	.187
	MS-1601-7	2	3.031	.500	.218
	MS-1601-8	3	3.062	.500	.250
	MS-1601-9	4	3.093	.500	.281
	MS-1601-10	5	3.125	.500	.312

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:

THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

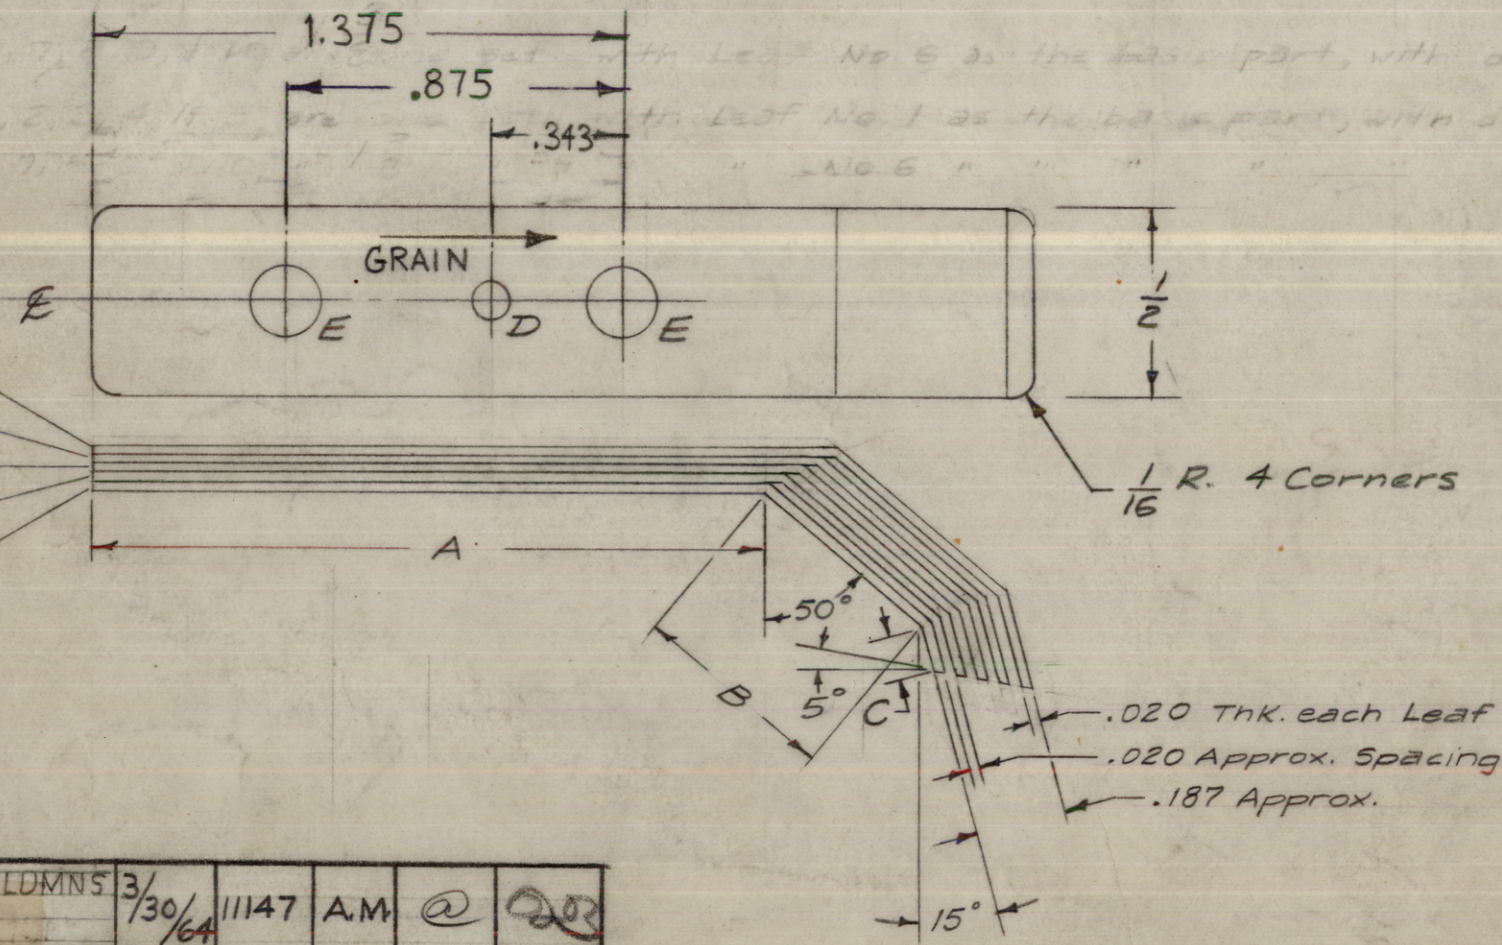

HOLES:
D - .109 Diam. 1 Req. per Leaf
E - .203 Diam. 2 Req. per Leaf

NOTE: (HEAT TREATMENT)
600°F FOR 2 HOURS IN CLOSED OVEN
AFTER BENDING AND MACHINING.

Note: All Three Angles Shown are the Same for All Five Leaves

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C	1	10K & 40K COLUMNS DELETED	3/30/64	11147	A.M.	@	203
B	6	FRACTIONAL DIM. CHANGED TO DECIMAL EQUIV. ON PICTORIAL	12-61	4578	M.A.F.		
B	5	ON 1601-5 "A" DIM WAS 2.000					
B	4	ON 1601-4 "A" DIM WAS 1.968					
B	3	ON 1601-3 "A" DIM WAS 1.937					
B	2	ON 1601-2 "A" DIM WAS 1.906					
B	1	ON 1601-1 "A" DIM WAS 1.875					
A	2	TYPE WAS SPRING TEMPER	9-26-60	3085			ARB
A	1	HEAT TREATMENT NOTE ADDED					

TOLERANCES		SCALE: 2X	2-1308	2-1309
DEC. DIM. ± .005		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		
FRAC. DIM. ± 1/64				
ANGULAR DIM. ± 2°				

REQ. PER UNIT	MODEL	PROJECT NO.	ASSY. NO.	DATE

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	.020 Thk. each	THE TECHNICAL MATERIEL CORP.	
	STOCK SIZE	MAMARONECK, NEW YORK	
	BERYLLIUM COPPER	CONTACT, SWITCH, SPRING TYPE	
	MATERIAL		
FULLY HARD	SEENOTE	16 11/10/58	ARB
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
.0005 Silver plate		203	
.000025 Rhodium Plate			
FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP	FINAL APPROVAL
			MS-1601 C