


MS-1604 D

MARK TMC PT. NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

- A ✓ RIVET HOLE PER REQ. MT 23 REQ.
- B ✓ 3/8 DIA. 2 REQ.
- C ✓ 1-3/8 (1.375) DIA. 1 REQ.
- D ✓ .175 DIA. 4 REQ.
- E ✓ 1/2 (.500) DIA. 1 REQ.

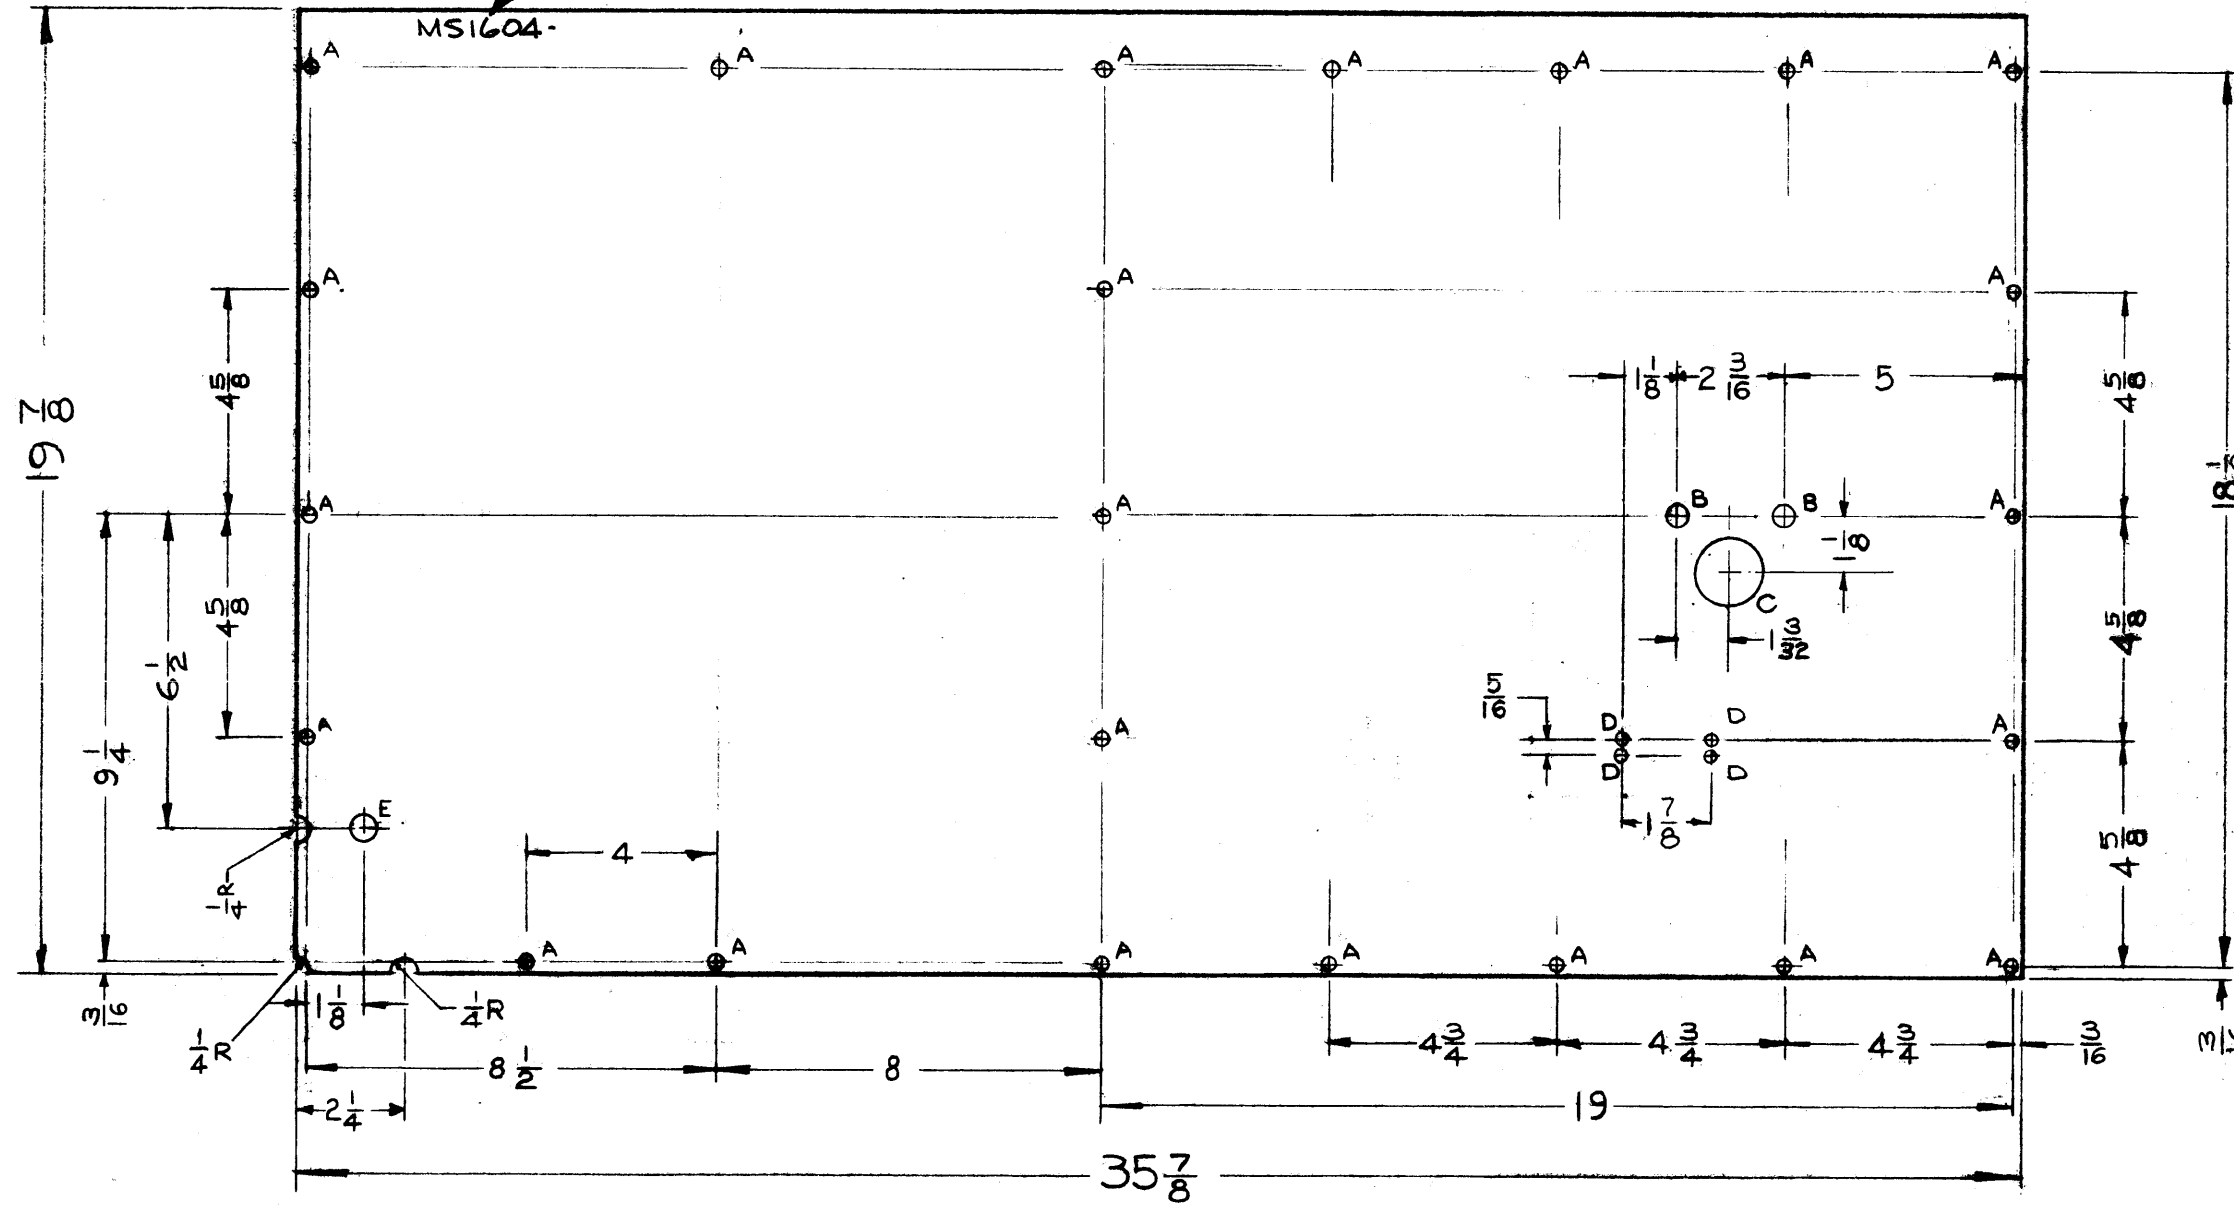

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

D	1	2 "D" HOLES RELOCATED TMC PT NO E 5404 ADDED	3-23-66	15972	G.D.L.	JCF	
C	1	TWO 1/4 R NOTCHES ADDED	6/2/60	2404	CU	JCF	
B	1	1 7/8 WAS 1 5/16; 3 5/8 WAS 3 1/2 & ADDED CUT "E"	6/12/59			JCF	
A	1	ADDED "D" HOLES (4)	3/2/59		ac	JCF	
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES		SCALE:					
DEC. DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.					
FRAC. DIM. ±		REMOVE ALL BURRS AND SHARP EDGES					
ANGULAR DIM. ±							

1	GPT-10K	AX-181	2-21-59
REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.
USED ON			

Ref-4LD-551

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	.064	THE TECHNICAL MATERIEL CORP.	
	STOCK SIZE	MAMARONECK, NEW YORK	
	ALUMINUM	TOP SHIELD, AUX. FRAME	
	MATERIAL		
	5052-H32		
	TYPE & TEMPER	HEAT TREAT. SPEC.	
	IRIDITE, S404		
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.