



REQ. PER UNIT	USED ON		MS-1653	A
	MODEL	ASS'Y. NO.		
	GPT-10K		2-19-59	

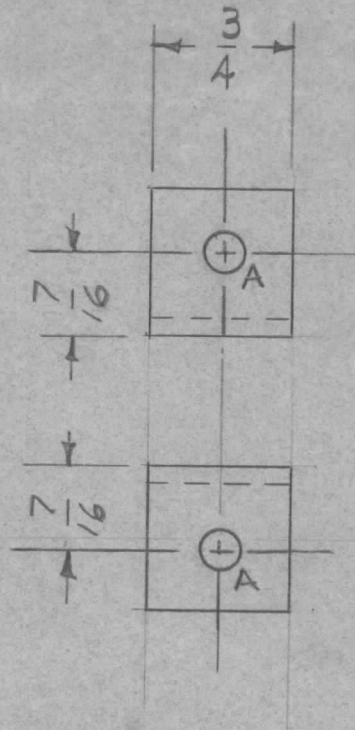

A - 13/64 DIA.

2 REQ'D.



UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES AND INCLUDE  
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° 30'

TOLERANCES

CUT HERE  
GUARANTEED  
2-66

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		.081 THICK	THE TECHNICAL MATERIEL CORP.				
		STOCK SIZE	MAMARONECK, NEW YORK				
		ALUMINUM	BRACKET				
		MATERIAL	DECOUPLING CHOKE				
		5052-H32	10R1110	NO	2B MS		
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
		IRIDITE		2B	2B	MS-1653	
		FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP	MS-1653		
					A		

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	13/64 CLARIFIED	6-2 60	2411	2		2B

TOLERANCES		SCALE: FULL
DEC. DIM. ±	FRAC. DIM. ±	ANGULAR DIM. ±
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		