


A - 13/64 DIA. 2 REQ'D.

REQ. PER UNIT	USED ON			MS-1658	C
	MODEL	ASS'Y. NO.	DATE		
2	GPT-10K	AX-171			
1	GPT-40K	AX-209	7-1-60		

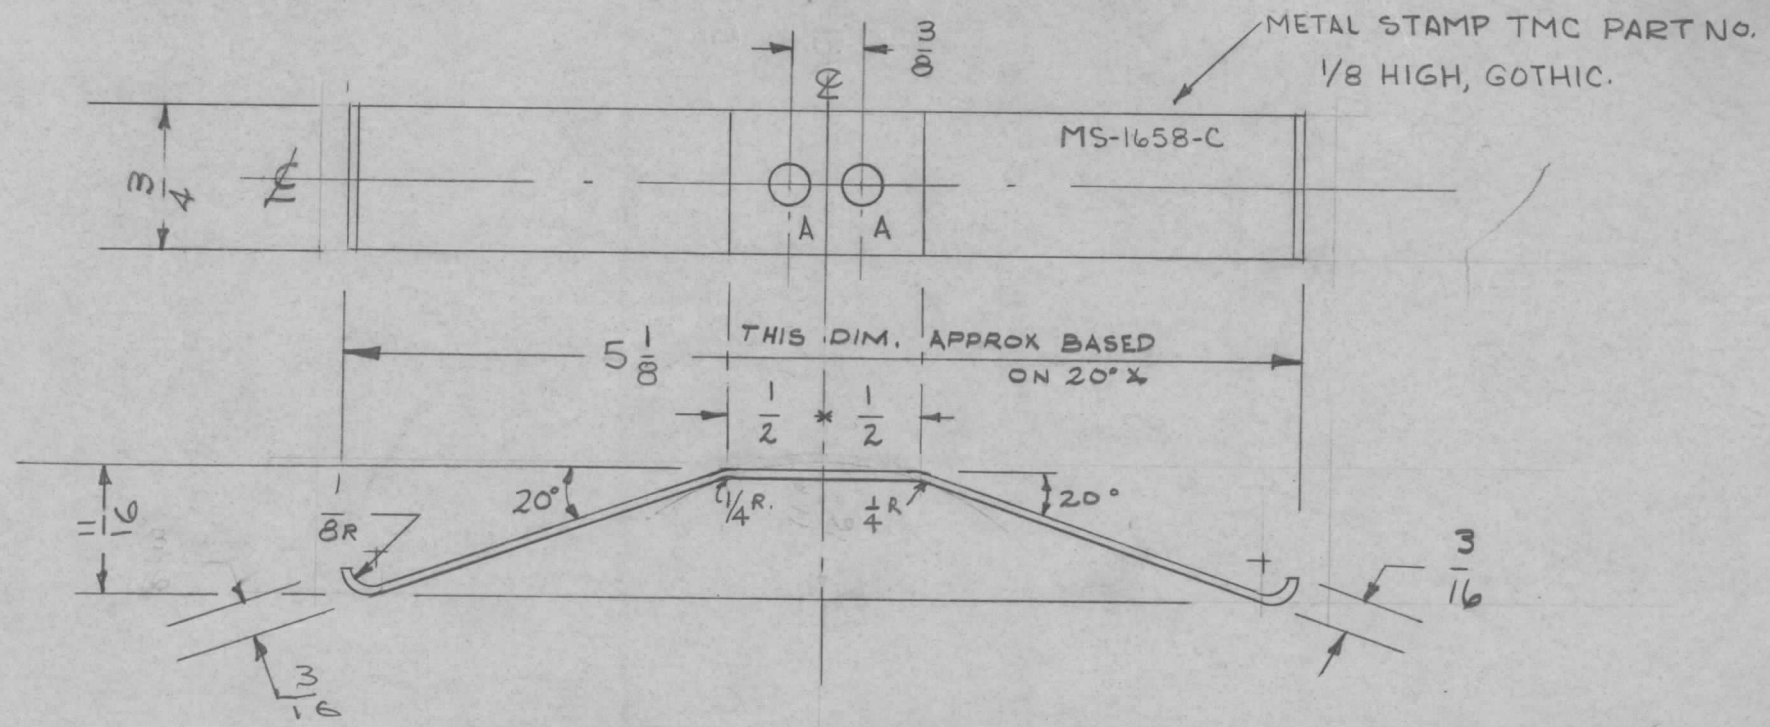

(STRIP LENGTH 5 7/16")

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES AND INCLUDE  
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30'

CUT HERE  
GUARANTEED  
2-66

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
C	1	DIM. 5 1/8 WAS 4 15/32	3-7-63	8466				.040		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK GROUND STRAP	C
B	1	HEAT TREATMENT ADDED	3-2-61	4317				STOCK SIZE			
A		ADDED 1" FLAT @ 20°	10/12/59	1396	PI			MATERIAL	BERYLLIUM COPPER		
TOLERANCES								SCALE:			
DEC. DIM. ±								MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			
FRAC. DIM. ±											
ANGULAR DIM. ±											
								2 HRS. AT 600° F		DRAWN	
								TYPE & TEMPER		CHECKED	
								SILVER PLATE .0003		FINAL APPROVAL	
								FINISH & SPEC. NO.		ELEC. DES. APP MECH. DES. APP	