REQ. PER. UNIT	USED ON			MS-1681
	MODEL	ASS'Y. NO.	DATE	
1	GPT-10K	IPA	3-20-59	

A - 11/64 DIA 2
B - 13/64 DIA. 5
C - 5/8 DIA. 1

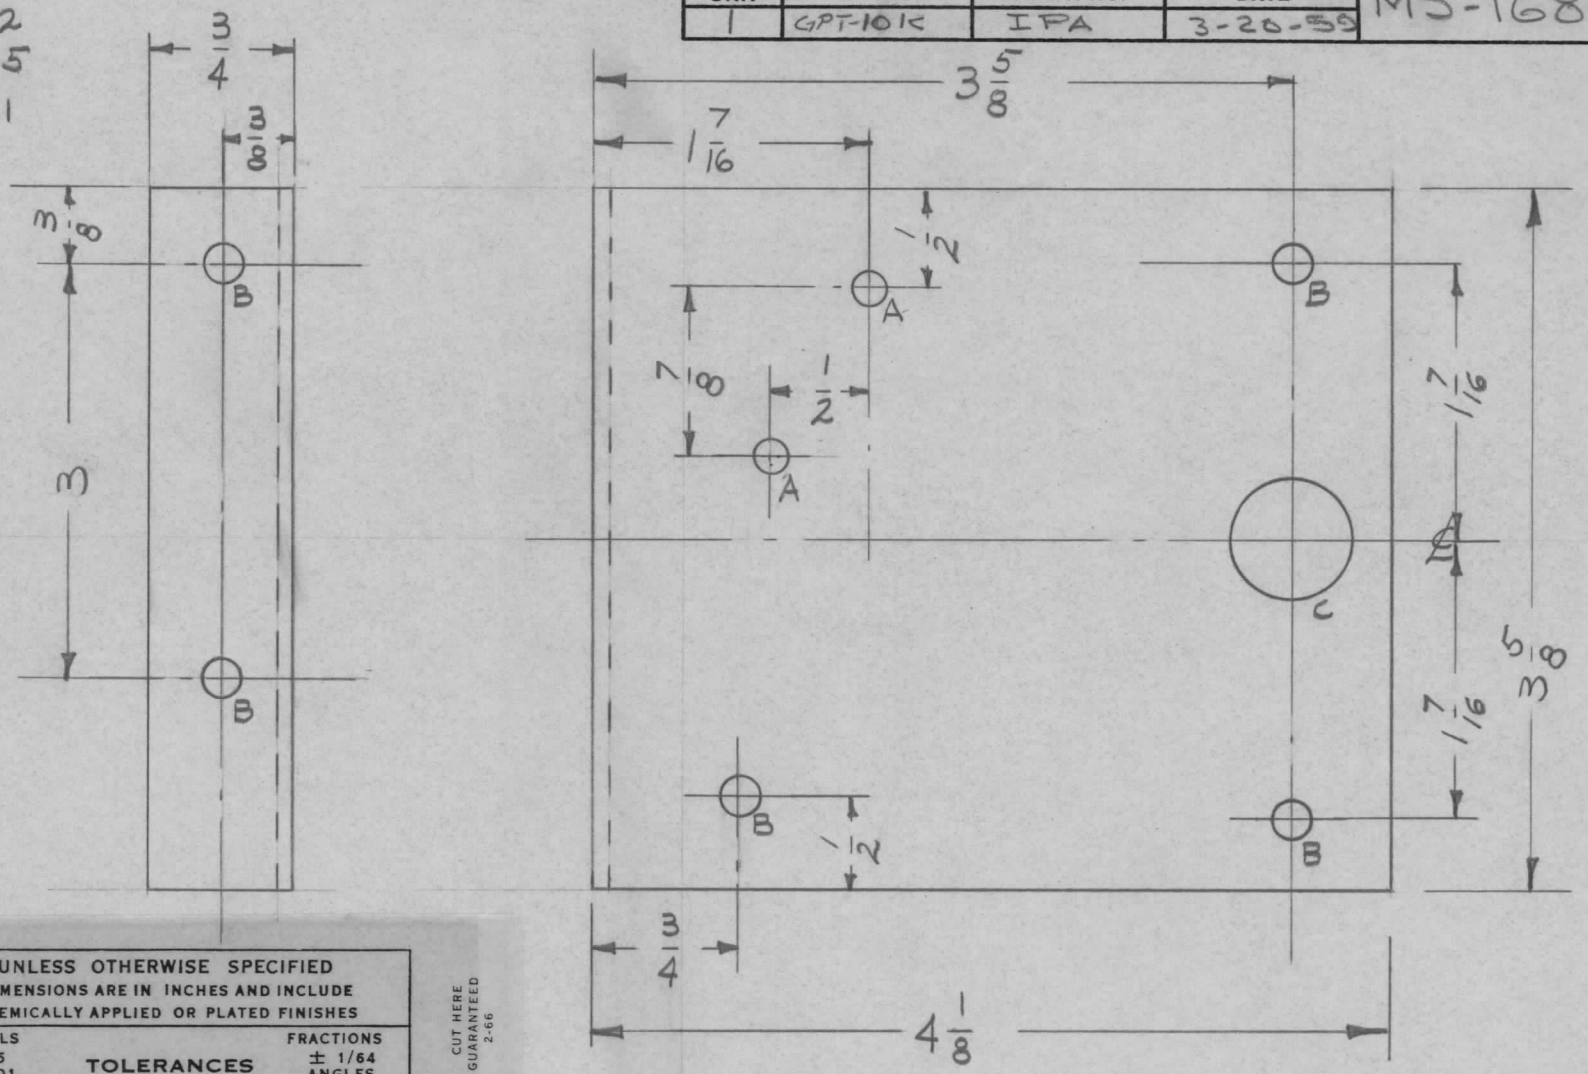

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS: .X ±.05, .XX ± .01, .XXX ±.005
FRACTIONS: ± 1/64
ANGLES: ± 0° 30'

CUT HERE GUARANTEED 2-66

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.081		

STOCK SIZE: ALUMINUM

MATERIAL: 5052-H32

TYPE & TEMPER | HEAT TREAT. SPEC.: IRIDITE

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

REAR SWITCH BRACKET

DRAWN	CHECKED	FINAL APPROVAL
TORILLO		
ELEC. DES. APP	MECH. DES. APP	MS-1681

FORM 108-A