


REQ. PER. UNIT	USED ON			MS-1756	A
	MODEL	ASS'Y. NO.	DATE		
2	UTO-2		5-4-59		

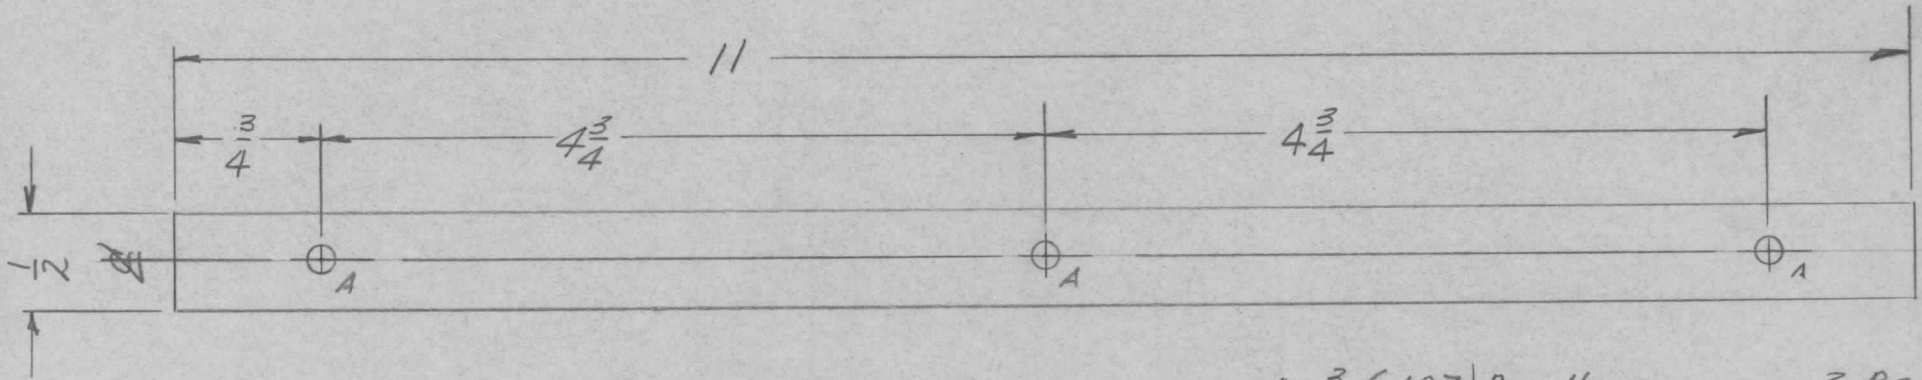

A - $\frac{3}{16}$ (.187) DIA. HOLE - 3 REQ.

NOTE: TO BE USED IF NECESSARY

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		.064 THICK	THE TECHNICAL MATERIEL CORP.				
		STOCK SIZE	MAMARONECK, NEW YORK				
		ALUMINUM	SHIM, SLIDE				
		MATERIAL					
A	1	5909-IRIDITE WAS SID/CAUSTIC DIP	2-8-59	1001	JP	EMN	
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: $\frac{1}{2}$				
DEC. DIM. \pm			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
FRAC. DIM. \pm $\frac{1}{64}$							
ANGULAR DIM. \pm							
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
S404 YEL IRIDITE					MS-1756 A		
FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP				