


REQ. PER. UNIT	USED ON			MS-1760	A
	MODEL	ASS'Y. NO.	DATE		
1	RFB-1		5-5-		
	RFC-1		11-22-60		

NOTE  
CUT ALL CORNERS  
AS SHOWN.

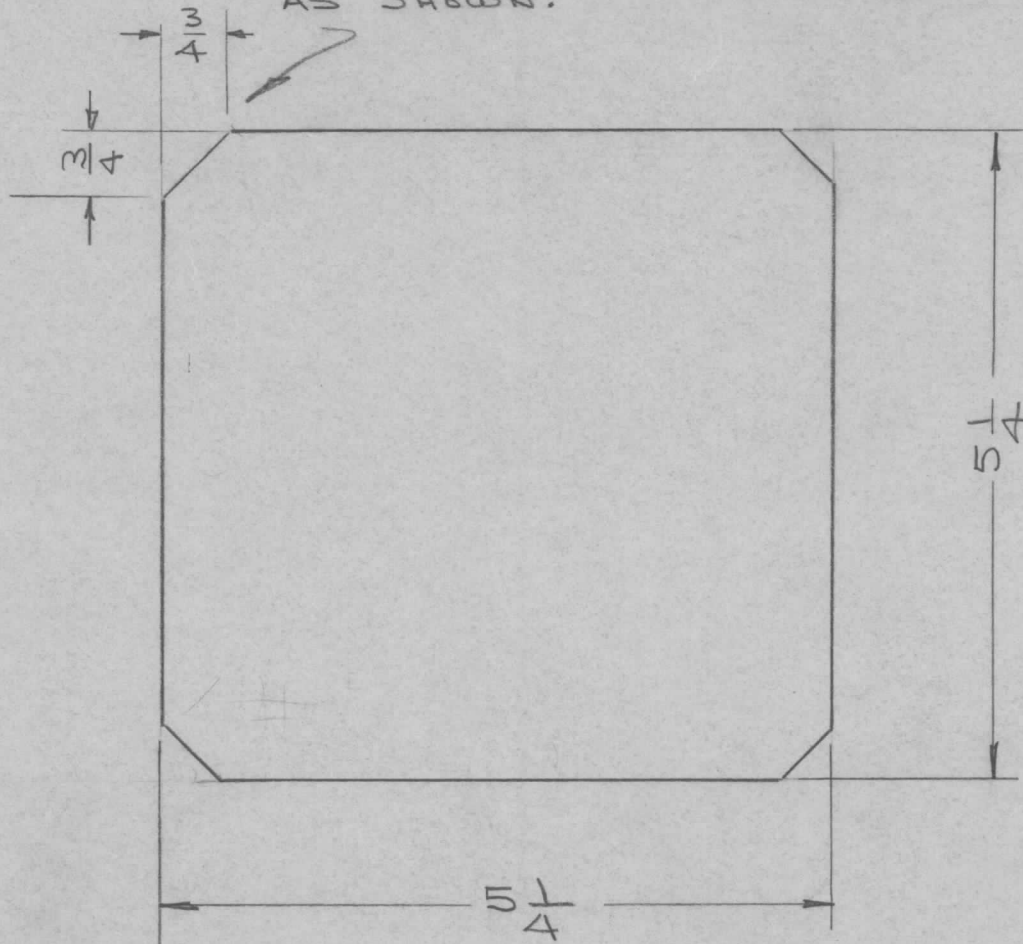

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES AND INCLUDE  
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES ± 0° 30'
.XXX ± .005	

TOLERANCES

REF: USED WITH MS-2497

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
										THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
A	2	ON STOCK SIZE ".010 WIRE" ADDED ON TYPE & TEMP. "18 X 18 MESH" ADDED ON FINIS & SPEC. "S404 YEL. IRIDITE ADDED"	5-9-62	6688	GDL	<i>[Signature]</i>	<i>[Signature]</i>			SCREEN, SHIELD, TOP COVER		
	1	TITLE WAS (COVER SCREENING RF SHIELD) - REF. WAS RF. MS-1639										
TOLERANCES			SCALE:					18 X 18 MESH			<i>[Signature]</i>	<i>[Signature]</i>
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
								S404 YELLOW IRIDITE			<i>[Signature]</i>	MS-1760 A
								FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP		