


REQ. PER. UNIT	USED ON			MS-1786	B
	MODEL	ASS'Y. NO.	DATE		
1	PS-5		6-12-59		

(PAL-1K)

A = 5/16 (.312) D. ~ 1 REQ.
 B = DRILL & CTSK. FOR
 3/48 FL. HD. SC.
 C = 13/64 x 13/32 2 REQ.
 SLOT

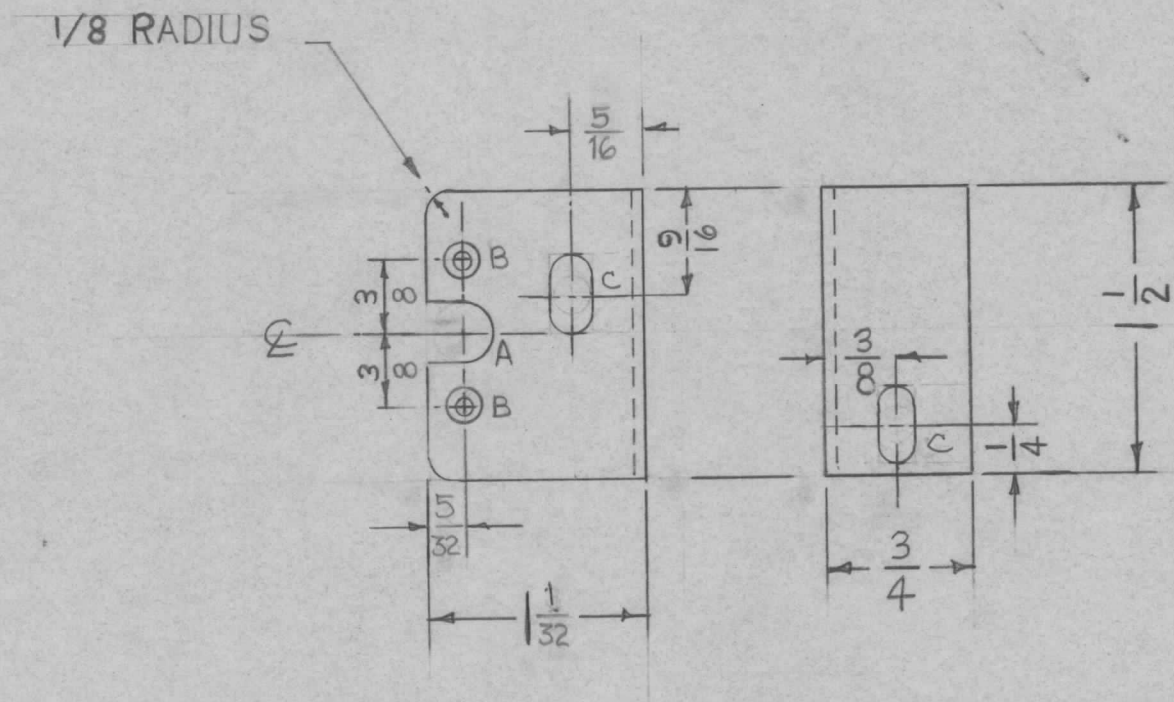

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL				
									.064	THE TECHNICAL MATERIEL CORP.					
									STOCK SIZE	MAMARONECK, NEW YORK					
B	2	C-HOLE WAS 13/64 DIA.	2-19-62	6339	G.S.	<i>[Signature]</i>	<i>[Signature]</i>		ALUMINUM	BRACKET, DOOR LATCH					
	1	1-1/32 DIM WAS 1-3/32													
A	3	5/32 WAS 3/16	8/24/59	1205	DM	<i>[Signature]</i>	<i>[Signature]</i>								
	2	1-3/32 WAS 1-1/8													
	1	5/16 WAS 3/8													
TOLERANCES			SCALE: FULL (Do NOT Scale)					5052-H32			<i>[Signature]</i>	<i>[Signature]</i>			
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					TYPE & TEMPER	HEATTREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL			
FRAC. DIM. ± 1/64								S404-IRIDITE							
ANGULAR DIM. ±								FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP					
											MS-1786	B			