


REQ. PER. UNIT	USED ON			MS-1840	B
	MODEL	ASS'Y. NO.	DATE		
1	GPT-10K	Aux. FR			

HOLES:
A-.191-.194 DIA. (3REQ.)

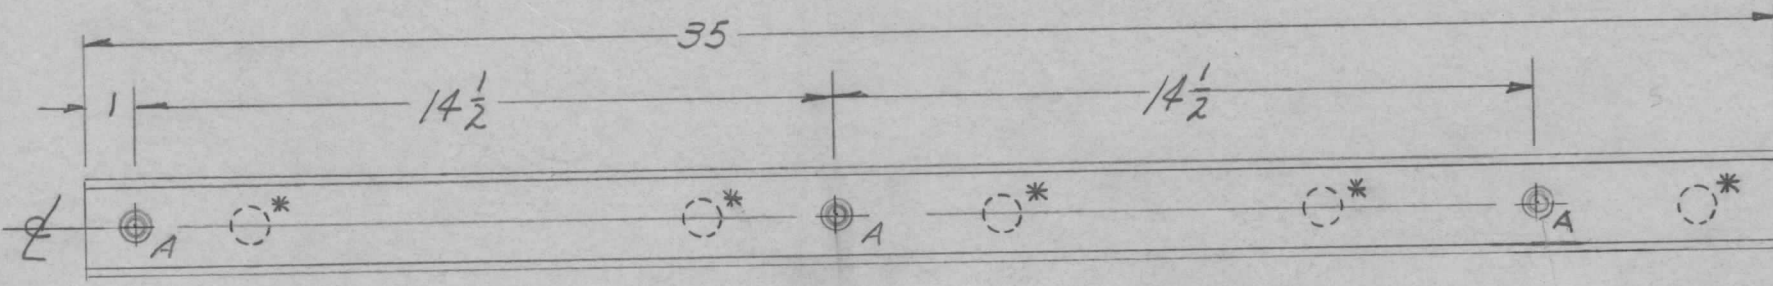

MOUNT IN ALL 'A' HOLES

NOTE:
PIECES MUST BE ORIENTED TO PREVENT NT129'S FROM BEING MOUNTED IN RANDOM KNOCKOUTS*

REF: PO 160

				3	1	NT129-632-3	NUT, PLAIN, SPLINE			A	
				REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL	
							THE TECHNICAL MATERIEL CORP.				
							MAMARONECK, NEW YORK				
B		DWG CLARIFIED	3-16-67	17979			A.C. STRIP				
A	1	KNOCKOUTS & NOTE ADD.	1.4.65	13195							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.				
TOLERANCES			SCALE:								
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.			TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
FRAC. DIM. ± 1/64			REMOVE ALL BURRS AND SHARP EDGES								MS-1840
ANGULAR DIM. ±						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		B

1840