


REQ. PER UNIT	USED ON			MS-1878	A
	MODEL	ASS'Y. NO.	DATE		
2	SBT-1K		9-17-59		
1	SBG-1L	RAK-20	12-19-61		

Holes
 A-11/64(.171)Dim. 2
 B-.221-.224 Dim (For NT-129-832-4) 2

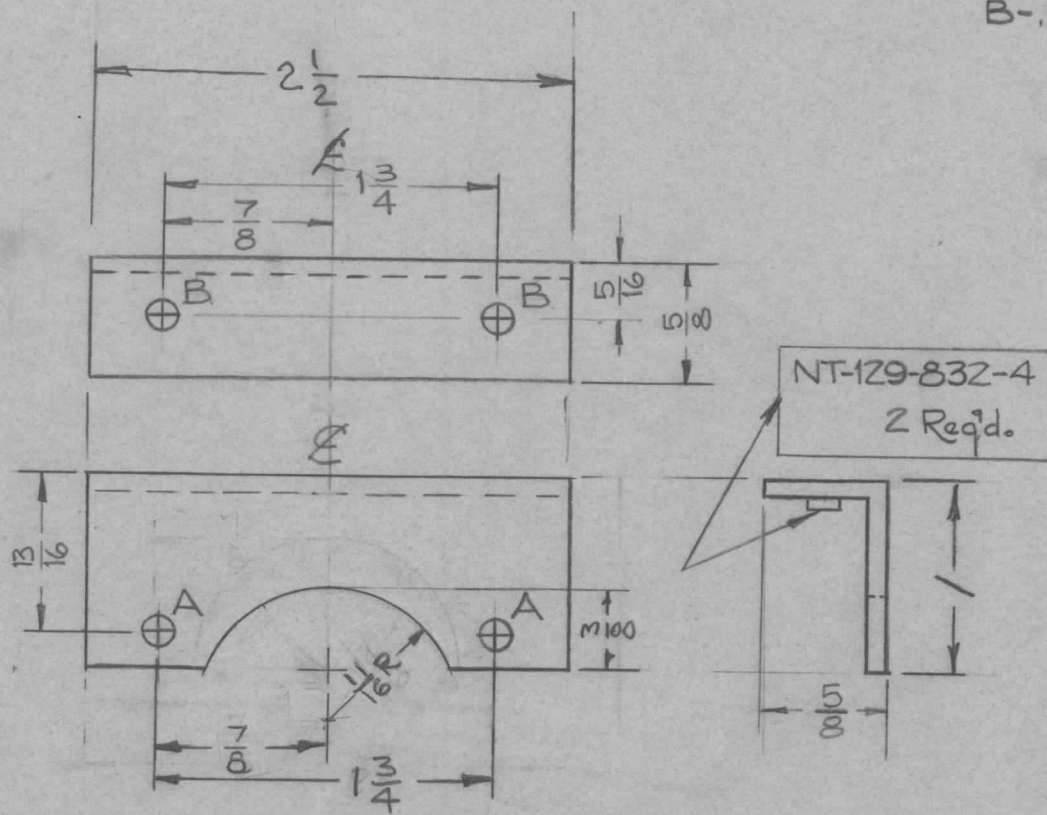

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL		
								.081		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
								STOCK SIZE					
A	1	1 3/8 DIA. CHG. TO 1/16 R	9/2/60	2171	CS	HJE	dm	ALUMINUM		MOUNTING BRACKET.			
								MATERIAL		SPRING MOTOR			
TOLERANCES								5052-H32		DMANUS	HJE	dm	MLB
SCALE:								TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
DEC. DIM. ± FRAC. DIM. ± 1/64 ANGULAR DIM. ±								S-404 Yellow Iridite					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES								FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP	MS-1878	A	