


|               |         |            |          |         |
|---------------|---------|------------|----------|---------|
| REQ. PER UNIT | USED ON |            |          | MS 1959 |
|               | MODEL   | ASS'Y. NO. | DATE     |         |
| 3             | AX-209  | GPT-40K    | 11/19/60 |         |

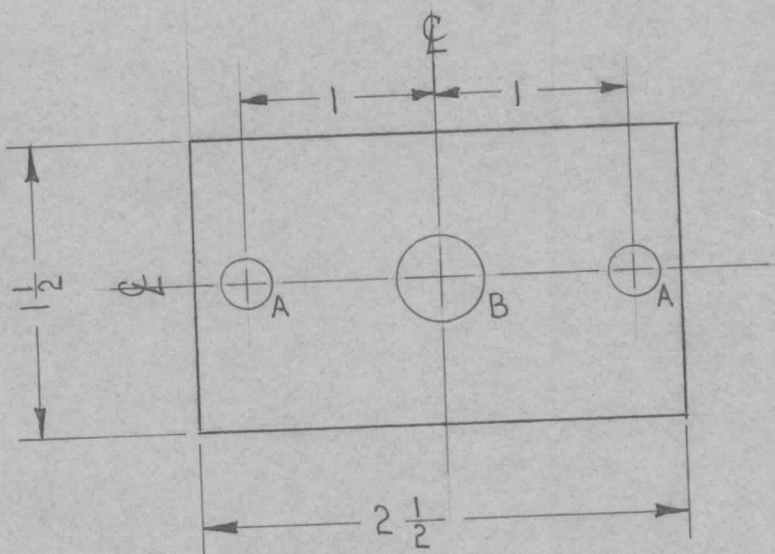

- A-  $\frac{.250}{.253}$  (NT-129-10-32-6) 2 REQ.
- B- 7/16 (FOR BB 117-10) 1 REQ.

|                   |  |      |              |             |         |        |         |           |  |      |                 |                              |             |                |  |
|-------------------|--|------|--------------|-------------|---------|--------|---------|-----------|--|------|-----------------|------------------------------|-------------|----------------|--|
| ISSUE             |  | ITEM | CHANGED FROM | DATE        | CH. NO. | DRAFTS | CHECKER | ENG. APP. | 2  | 1    | NT-129-10-32-6  | NUT, ROUND, SWAGE TYPE       |             |                |  |
|                   |  |      |              |             |         |        |         |           | REQ.   | ITEM | PART NO.        | DESCRIPTION                  | SYMBOL      |                |  |
|                   |  |      |              |             |         |        |         |           |  |      | 1/8 THK.        | THE TECHNICAL MATERIEL CORP. |             |                |  |
|                   |  |      |              |             |         |        |         |           |  |      | STOCK SIZE      | MAMARONECK, NEW YORK         |             |                |  |
|                   |  |      |              |             |         |        |         |           |  |      | ALUMINUM        | PLATE, SHAFT ADJ.            |             |                |  |
|                   |  |      |              |             |         |        |         |           |  |      | MATERIAL        |                              |             |                |  |
|                   |  |      |              |             |         |        |         |           | 5052-H32   |      |                 | <i>M.F.</i>                  | <i>De</i>   | <i>OB</i>      |  |
|                   |  |      |              |             |         |        |         |           | TYPE & TEMPER  |      | HEATTREAT.SPEC. | DRAWN                        | CHECKED     | FINAL APPROVAL |  |
|                   |  |      |              |             |         |        |         |           | S-404 YEL. IRIDITE   |      |                 |                              | <i>RLRL</i> | MS-1959        |  |
|                   |  |      |              |             |         |        |         |           | FINISH & SPEC. NO.   |      | ELEC. DES. APP. | MECH. DES. APP.              |             |                |  |
| TOLERANCES        |  |      |              | SCALE: FULL |         |        |         |           | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES |      |                 |                              |             |                |  |
| DEC. DIM. ±       |  |      |              |             |         |        |         |           |  |      |                 |                              |             |                |  |
| FRAC. DIM. ± 1/64 |  |      |              |             |         |        |         |           |  |      |                 |                              |             |                |  |
| ANGULAR DIM. ±    |  |      |              |             |         |        |         |           |  |      |                 |                              |             |                |  |