



REQ. PER UNIT	USED ON			MS-2020
	MODEL	ASS'Y. NO.	DATE	
4	AR-116 GPT-40K		2-4-60	

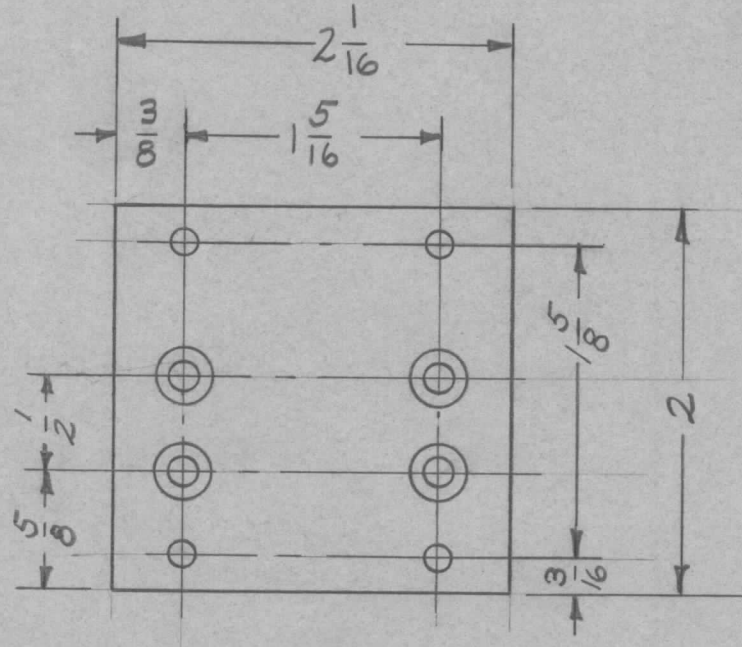

A - 1/8 (.125) D. 4 REQ'D.
 B - DR: ϕ C'SINK FOR 6-32 FHS 4 REQ'D.

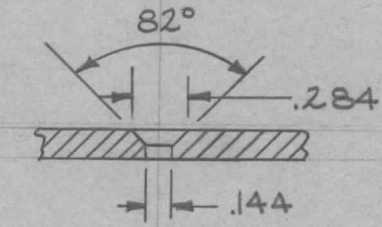

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES AND INCLUDE
 CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	FRACTIONS
.X \pm .05	\pm 1/64
.XX \pm .01	ANGLES
.XXX \pm .005	\pm 0° 30'

TOLERANCES

CUT HERE
 GUARANTEED
 2-66

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
										1/8	THE TECHNICAL MATERIEL CORP.	
										STOCK SIZE	MAMARONECK, NEW YORK	
										ALUMINUM	PLATE, RELAY MOUNTING	
										MATERIAL	PA SCREEN ON-OFF & TUNE OPEP.	
										5052-H32	<i>TORILLO</i> 2-4-60	<i>VB</i>
										TYPE & TEMPER	CHECKED	FINAL APPROVAL
										HEAT TREAT. SPEC.		
										5404 YEL. IRIDITE	<i>VB</i>	MS-2020
										FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP

TOLERANCES

DEC. DIM. \pm
 FRAC. DIM. \pm
 ANGULAR DIM. \pm

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES