


| | | | | | |
|----------------|---------|------------|--------|---------|---|
| REQ. PER. UNIT | USED ON | | | MS-2086 | A |
| | MODEL | ASS'Y. NO. | DATE | | |
| 1 | GPT 40K | AX-212 | 3/3/60 | | |

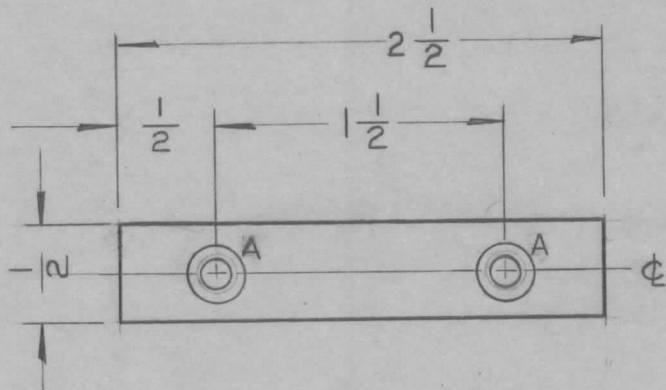

A ~ DRILL & C'SK 2 REQ FOR 8-32 F.H.S.

| | | | | | | | REQ. ITEM | PART NO. | DESCRIPTION | SYMBOL | | | | |
|-------------------|---|---------------------------|--|---------|--------|---------|--------------------|------------------------|------------------------------|----------------|----------------|--|---------|---|
| | | | | | | | .064 | | THE TECHNICAL MATERIEL CORP. | | | | | |
| | | | | | | | STOCK SIZE | | MAMARONECK, NEW YORK | | | | | |
| A | 1 | "A" HOLES WERE 3/16 DRILL | 11-12-63 | 10374 | | | ALUMINUM | PLATE, CABLE RETAINING | | | | | | |
| ISSUE ITEM | | CHANGED FROM | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | (CROWBAR DRAWER | | | | | | |
| TOLERANCES | | | SCALE: | | | | 5052-H32 | | | | | | | |
| DEC. DIM. ± | | | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES | | | | TYPE & TEMPER | HEATTREAT. SPEC. | DRAWN | CHECKED | FINAL APPROVAL | | | |
| FRAC. DIM. ± 1/64 | | | | | | | S404 IRIDITE | | | | | | MS-2086 | A |
| ANGULAR DIM. ± | | | | | | | FINISH & SPEC. NO. | | ELEC. DES. APP | MECH. DES. APP | | | | |