


RIGHT SIDE ONLY  
 A = 5/32 (.156) D 2 HOLES  
 B = 13/64 (.203) D 1 HOLE  
 C = 7/32 (.218) D 3 HOLES  
 D = 3/4 (.750) D 6 HOLES

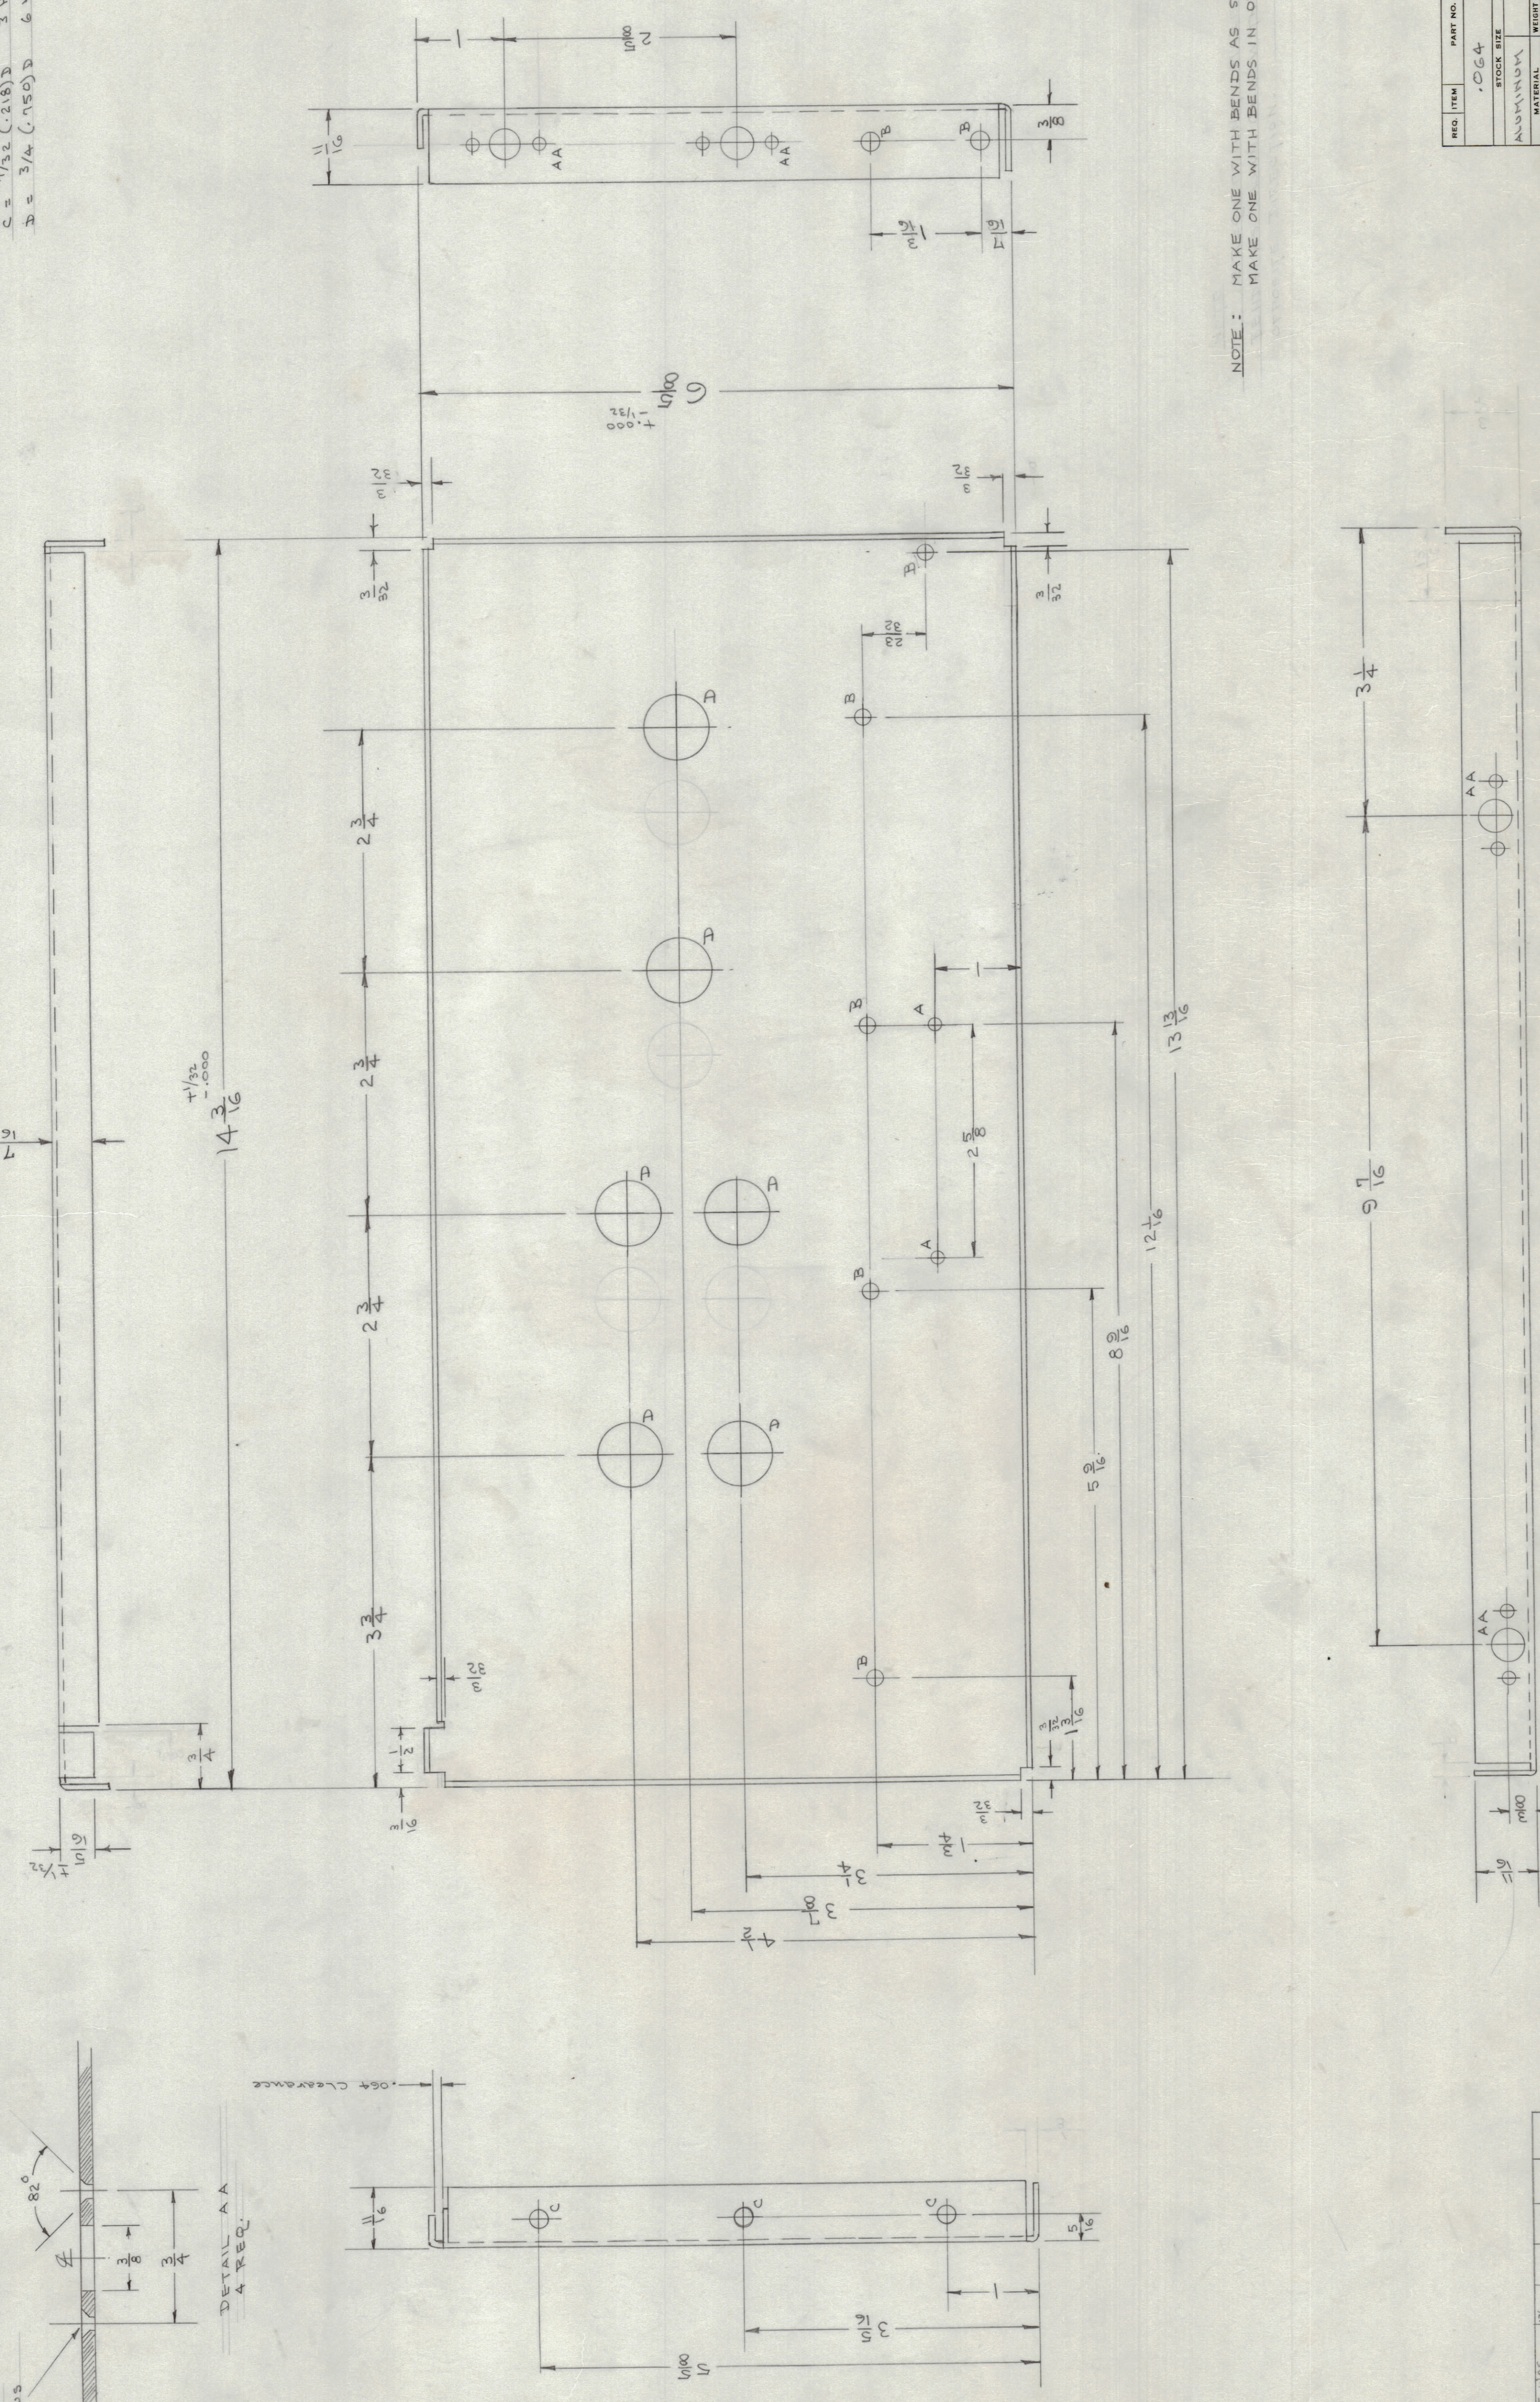

NOTE: MAKE ONE WITH BENDS AS SHOWN (MS-250-1) (LEFT SIDE)  
 MAKE ONE WITH BENDS IN OPPOSITE DIRECTION (MS-250-2) (RIGHT SIDE)

ISSUE ITEM	CHANGED FROM	DATE	EN. NO.	DRAWER	CHECKED	ENG. APP.
C	5-400 IRIDITE WAS	7/1/59	1001	A.B.		EMN
B	5-101 CASTING DIA	7/1/59	2	BOS		WJ
A	NOTE CHANGED	7/1/59	1	WJ		WJ

SCALE: UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES AND DECIMALS THEREOF  
 TOLERANCES ARE NOT INCLUDED.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
1	1064	THE TECHNICAL MATERIEL CORP. HAMARONCK, NEW YORK	
		ALUMINUM	
		525-H32	
		TYPE & TEMPER	
		HEAT TREAT SPEC.	
		S404 IRIDITE	
		FINISH & SPEC. NO.	

PROJECT NO.	DATE	ABBY. NO.	USED ON
159	5-29-53		
DVM			
MODEL			

DRAWN	ENG. DES. APP.	HECK. DES. APP.	FINAL APPROVAL
WJ			

IT IS THE BUYER'S RESPONSIBILITY TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES SHALL BE IN INCHES AND DECIMALS THEREOF. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES SHALL BE IN INCHES AND DECIMALS THEREOF. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES SHALL BE IN INCHES AND DECIMALS THEREOF.

Drill & check for 3-AB.F. AD. Screws

DETAIL AA  
 4 REQ.