


| REQ. PER UNIT | USED ON |         |
|---------------|---------|---------|
|               | MODEL   | DATE    |
| 1             | CFA-1   | 7-23-58 |
| 1             | CFA-1LB | 7-23-58 |
| 1             | CFA-L   | 7-23-58 |

MS-283 B

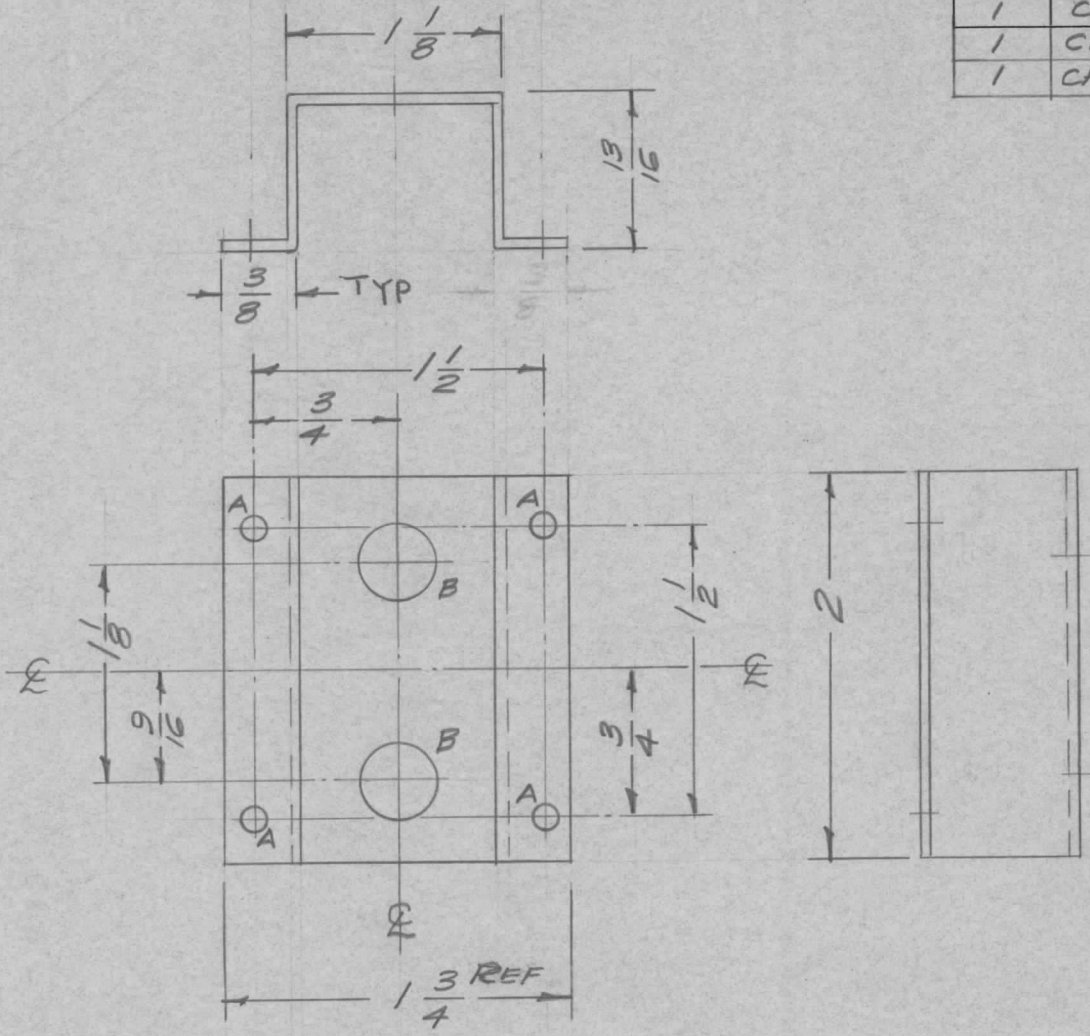

A - 9/64 (.140) 4 Req.  
 B - 13/32 (.406) 2 Req.

| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES |            |           |
|---|------------|-----------|
| DECIMALS  | TOLERANCES | FRACTIONS |
| .X ± .05  |            | ± 1/64    |
| .XX ± .01   |            | ANGLES    |
| .XXX ± .005   |            | ± 0° 30'  |

CUT HERE  
 GUARANTEED  
 2-66

| ISSUE             | ITEM | CHANGED FROM            | DATE    | CH. NO. | DRAFTS | CHECKER | ENG. APP. | REQ. ITEM   | PART NO.   | DESCRIPTION  | SYMBOL                 |                 |  |         |  |                |  |
|-------------------|------|-------------------------|---------|---------|--------|---------|-----------|---|------------|--|------------------------|-----------------|--|---------|--|----------------|--|
|                   |      |                         |         |         |        |         |           |   | .051 THK   | THE TECHNICAL MATERIEL CORP.<br>MAMARONECK, NEW YORK | BRACKET, POTENTIOMETER |                 |  |         |  |                |  |
|                   |      |                         |         |         |        |         |           |   | STOCK SIZE |  |                        |                 |  |         |  |                |  |
|                   |      |                         |         |         |        |         |           |   | Aluminium  |  |                        |                 |  |         |  |                |  |
|                   |      |                         |         |         |        |         |           |   | MATERIAL   |  |                        |                 |  |         |  |                |  |
| B                 | 1    | Redrawn-No mech. Rev. - | 7/23/58 | 2       | 16     |         |           |   | 5052-H32   | 16 7/23/58   |                        |                 |  |         |  |                |  |
| TOLERANCES        |      |                         |         |         |        |         |           | SCALE: FULL   |            |  |                        |                 |  |         |  |                |  |
| DEC. DIM. ±       |      |                         |         |         |        |         |           | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. |            |  |                        |                 |  |         |  |                |  |
| FRAC. DIM. ± 1/64 |      |                         |         |         |        |         |           | REMOVE ALL BURRS AND SHARP EDGES  |            |  |                        |                 |  |         |  |                |  |
| ANGULAR DIM. ±    |      |                         |         |         |        |         |           |   |            |  |                        |                 |  |         |  |                |  |
|                   |      |                         |         |         |        |         |           | TYPE & TEMPER   |            | HEAT TREAT. SPEC.                                    |                        | DRAWN           |  | CHECKED |  | FINAL APPROVAL |  |
|                   |      |                         |         |         |        |         |           | S404 IRIDITE  |            |  |                        |                 |  |         |  | MS-283 B       |  |
|                   |      |                         |         |         |        |         |           | FINISH & SPEC. NO.  |            | ELEC. DES. APP.                                      |                        | MECH. DES. APP. |  |         |  |                |  |