REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE
1	CFA-1		7-23-58
1	CFA-L		7-23-58
1	CFA-LB		7-23-58

MS-284 A

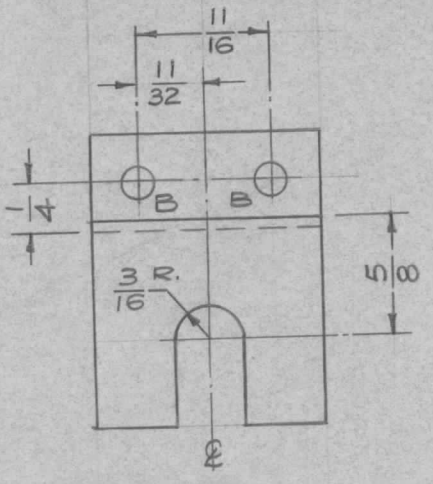

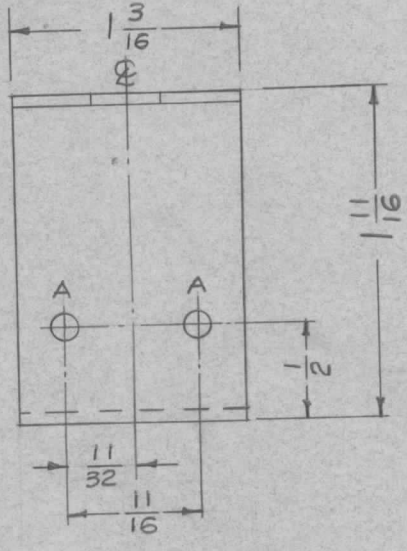

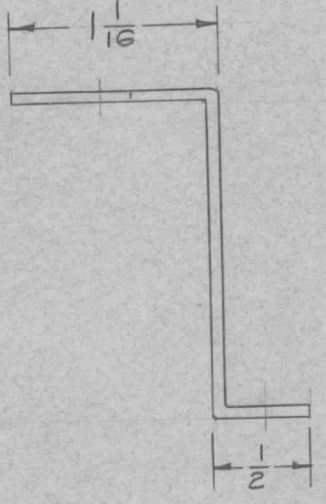

A - 9/64 (.140) D. 2 REQ.

B - 11/64 (.171) D. 2 REQ.

REF: (1) LD-433

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30′

CUT HERE GUARANTEED 2-66

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	—	REDRAWN - NO CHANGE	7/23/58	—	46	—	—

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE: FULL

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
			BRACKET, REACTOR and POTENTIOMETER MOUNTING	

.051 Thk.		7-23-58		
STOCK SIZE		RE-DRAWN	CHECKED	FINAL APPROVAL
Aluminum				MS-284 A
MATERIAL				
5052-H32				
TYPE & TEMPER	HEAT TREAT. SPEC.	ELEC. DES. APP.	MECH. DES. APP.	
S404 IRIDITE				
FINISH & SPEC. NO.				