



REQ. PER UNIT	USED ON			MS-2157 B
	MODEL	ASSY. NO.	DATE	
2	MODE SWITCH	GPT-40 K	3-17-60	

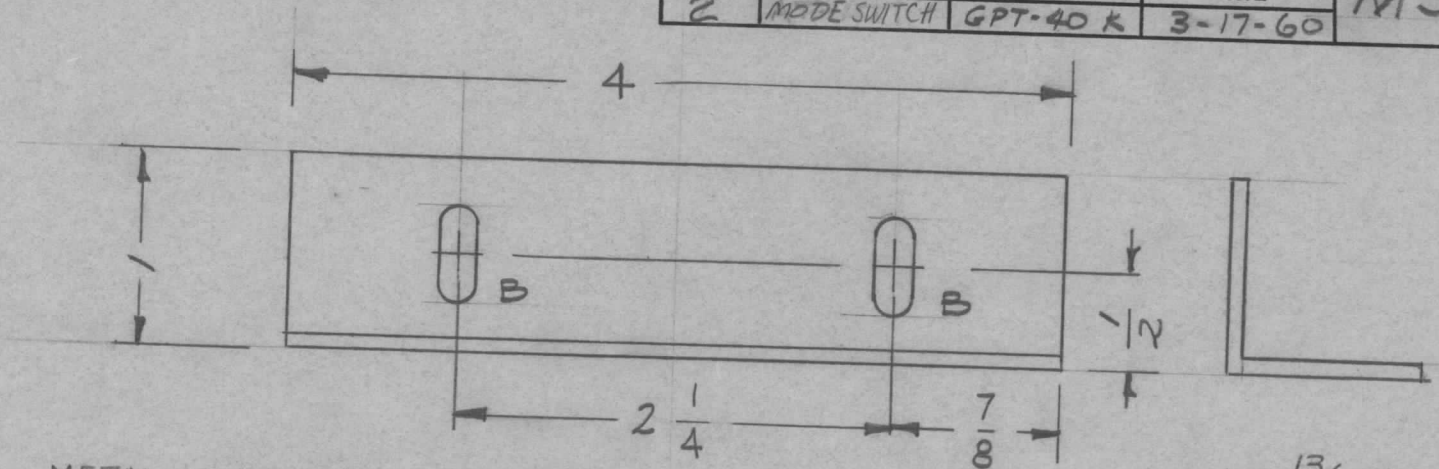

METAL STAMP TMC PART NO.  
1/8 HIGH, GOTHIC.

- A - 13/64 (.203) D 2
- B - 3/16 x 1/2 SLOTS 2
- C - 5/32 D HOLE 1

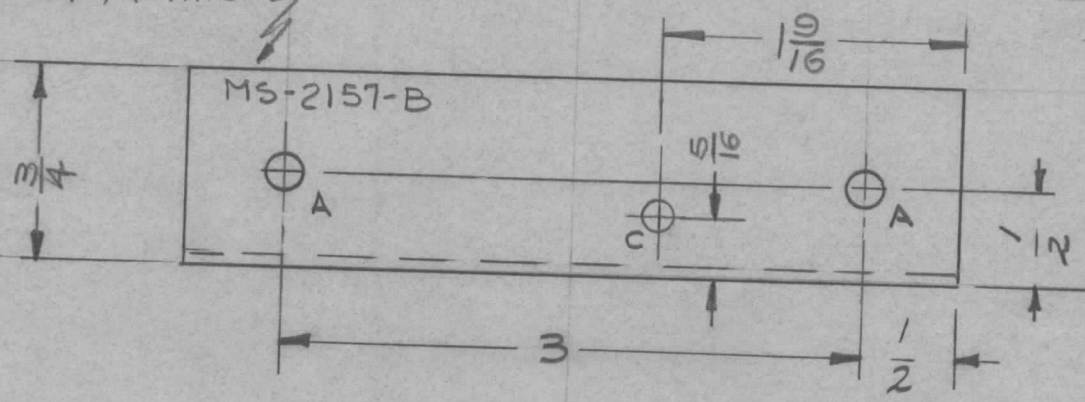

REQ.	ITEM	PART NO.	DESCRIPTION		SYMBOL										
B	1	(2) "A" HOLES WERE 13/64 (.187) DIA.	2-7-63	8141	<i>[Signature]</i>	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK BRACKET CAPACITOR MOUNT LOAD RESISTOR									
A	3	3/4 WAS 1" DIM.	8-8-60	2723	<i>[Signature]</i>										
A	2	"A" HOLE WAS 3/16 DIA.													
	1	1 HOLE ADDED			<i>[Signature]</i>										
ISSUE		ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL		FINISH & SPEC. NO.				
TOLERANCES			SCALE: FULL			5052-H32		5404-YEL. IRIDITE		ELEC. DES. APP.		MECH. DES. APP.			
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED			
FRAC. DIM. ±						5052-H32		5404-YEL. IRIDITE		<i>[Signature]</i>		<i>[Signature]</i>		FINAL APPROVAL	
ANGULAR DIM. ± 1/64						5052-H32		5404-YEL. IRIDITE		<i>[Signature]</i>		<i>[Signature]</i>		MS-2157 B	