
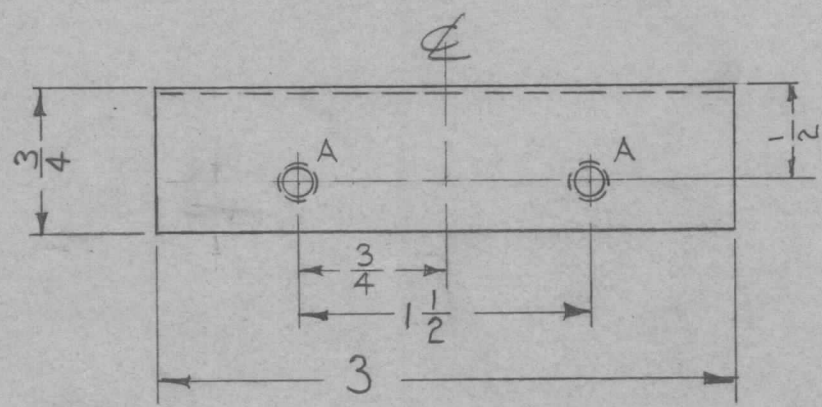


REQ. PER UNIT	USED ON			MS-2234	B
	MODEL	ASS'Y. NO.	DATE		
2	GPR-90RXD.		5-2-60		

HOLE	DESCRIPTION	REQ
A	.144 DIA C'SK 82 TO .284 D.	2
B	5/16 (.312) D.	3
C	.120 DIA. C'SK 82° TO .230 D.	2

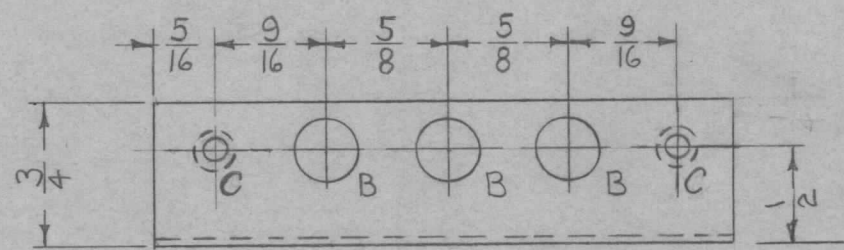

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
								.064		THE TECHNICAL MATERIEL CORP.		
								STOCK SIZE		MAMARONECK, NEW YORK		
B	1	ADD 2" C' HZS. DEEE 2" A"	11/5/65	15094	JLV	JCB		ALUMINUM		BRACKET		
A	1	"A"-HOLES WERE 9/64 DIA.	9.2.64	12265	WLB	JCB		MATERIAL		TRIMMER CONDENSER		
TOLERANCES			SCALE:					5052-H32				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
FRAC. DIM. ± 1/64								3404 YELL. IRIDITE				
ANGULAR DIM. ±								FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP	MS-2234	B