


REQ. PER UNIT	USED ON			MS-2278	C
	MODEL	ASS'Y. NO.	DATE		
	2	CPP-1	2		
2	CPP-5		9-5-63		

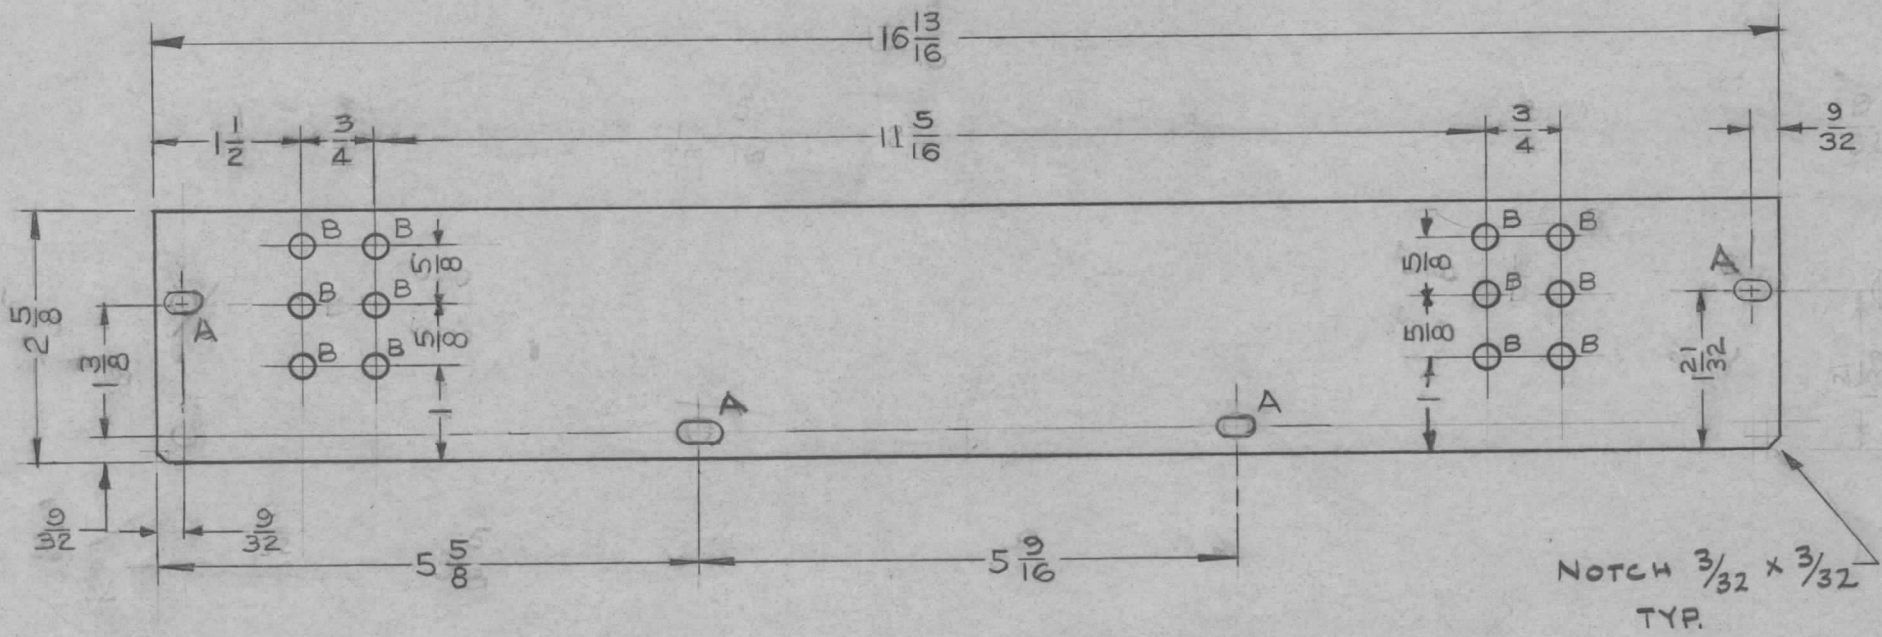

NOTE  
 A  $\frac{1}{16} \times \frac{1}{32}$  SLOTS 4 REQ  
 B  $\frac{1}{4}$  D. 12 REQ.  
 C  $\frac{1}{16} \times \frac{1}{16}$  SLOTS 2 REQ

C	1	UPDATED DWG PER EMN. NO. 10168	10/14/63	10168	MT	MT	MT
B	1	"A" Holes were $\frac{1}{16}$ D	11-4-60	3391	CB	CB	CB
A	3	ITEM 1 & 2 FROM BUILDUP DELETED	5-24-60	2362	CB	CB	CB
	2	NOTE DELETED					
	1	"A" & "B" HOLES ADDED					
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: $\frac{1}{16} = 1$				
DEC. DIM. $\pm$ FRAC. DIM. $\pm$ $\frac{1}{64}$ ANGULAR DIM. $\pm$			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION: REMOVE ALL BURRS AND SHARP EDGES				

4	2	FS-109-3	RING, STUD RETAINING	
4	1	FS-107-1	STUD, W/FLAT HEAD	
REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
.051			THE TECHNICAL MATERIEL CORP.	
STOCK SIZE			MAMARONECK, NEW YORK	
ALUMINUM			COVER PLATE	
MATERIAL				
5052-H32			10/14/63	CB
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED
S404-YEL. IRIDITE				
FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP	
			MS-2278	C