


REQ. PER UNIT	USED ON			MS-2306	B
	MODEL	ASS'Y. NO.	DATE		
1	RAK-11				
1	RAK-12		7-17-62		

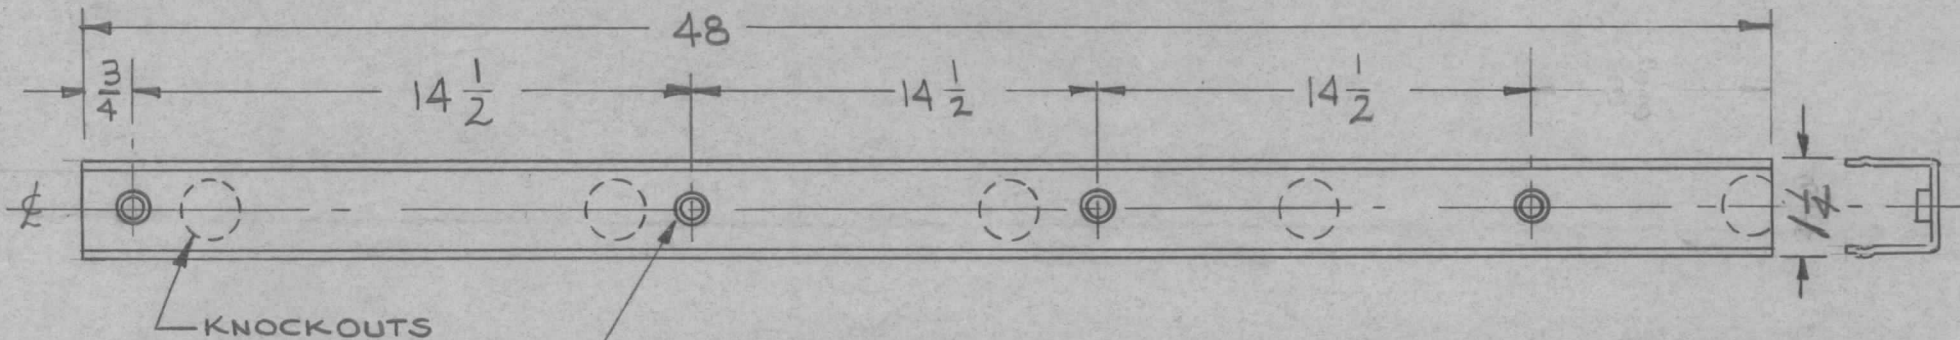

A-.191-194 DIA. HOLES (FOR NT-129-632-3) 4 REQ.

NOTE:

PIECES TO BE ORIENTED SO THAT A-HOLES WILL NOT APPEAR IN RANDOM KNOCKOUTS

REF. TMC # PO - 160

				4	1	NT-129-632-3	NUT ROUND, SWAGE TYPE						
				REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL			
				STOCK SIZE			THE TECHNICAL MATERIEL CORP.						
							MAMARONECK, NEW YORK						
							AC STRIP						
				MATERIAL									
				TYPE & TEMPER			HEATTREAT. SPEC.		DRAWN		CHECKED	FINAL APPROVAL	
				FINISH & SPEC. NO.			ELEC. DES. APP		MECH. DES. APP				
B	1	KNOCKOUTS & NOTE ADDED	11.3.64	12828	hjb	Flann	[Signature]						
A	1	Ⓐ Hole was .221 <sup>D. FOR</sup> NT-129-632-4	1-25-60	3969	RU	JCB	[Signature]						
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.						
TOLERANCES			SCALE: <i>1/64</i>										
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.										
FRAC. DIM. ±			REMOVE ALL BURRS AND SHARP EDGES										
ANGULAR DIM. ±													
					10/11/60		[Signature]		[Signature]				
							A.R.F.		MS-2306		B		