

MS-2319 A



HOLES ~

A - .250 DIA. MIN., .253 DIA. MAX.
FOR NT129-1032-4.

5 REQ.

4 REQ.

$\frac{3}{64} \times \frac{13}{32}$ SLOTS

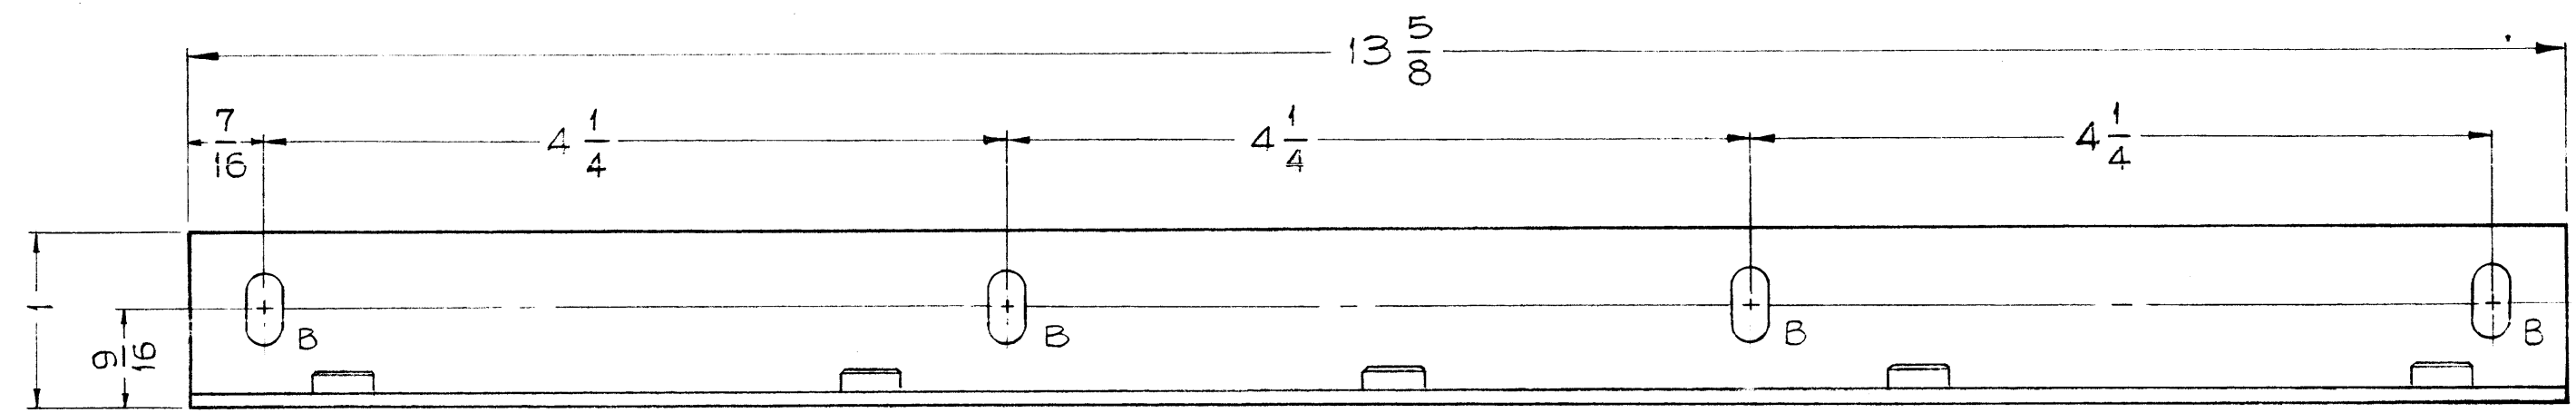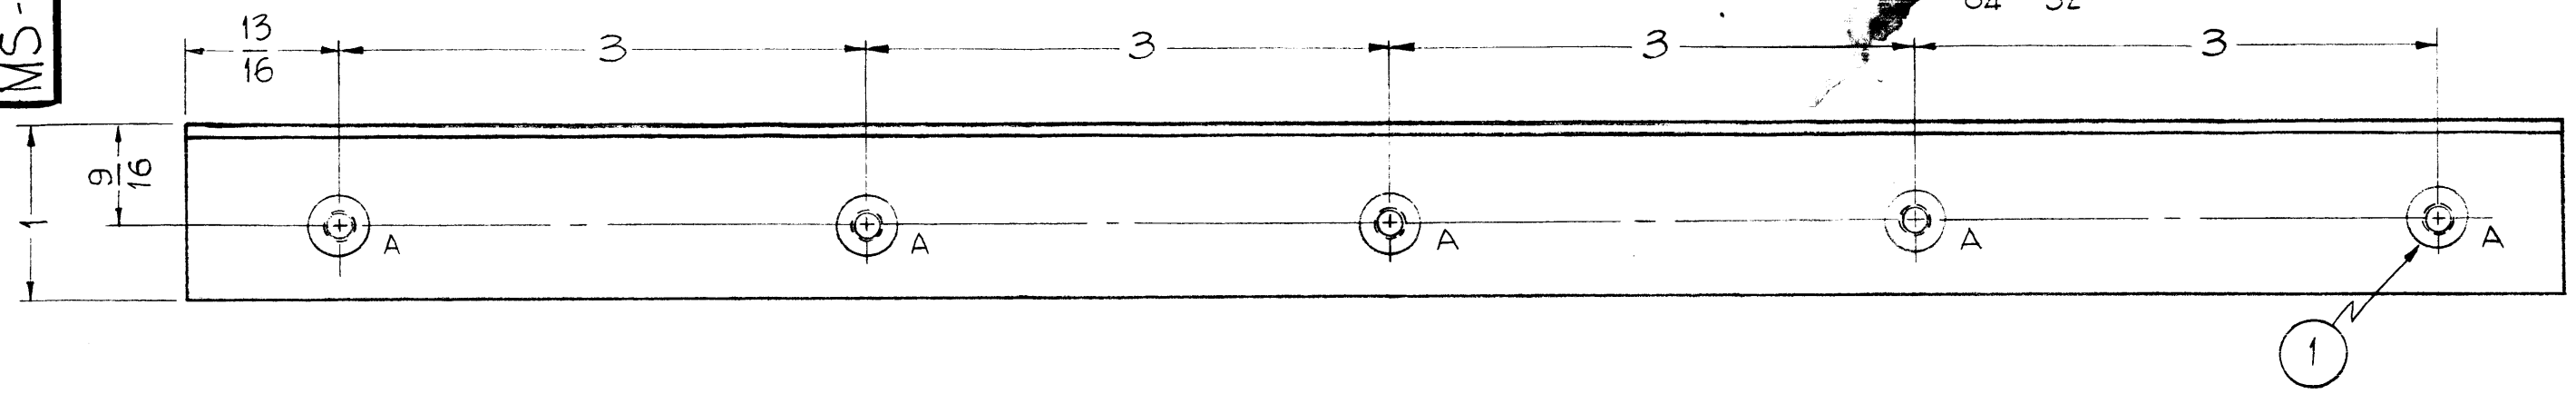

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

A	1	Dim. 13/16 WAS 7/8	3-6-61	4319	DGM	JCB	JCB	
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
TOLERANCES			SCALE: FULL (DO NOT SCALE)					
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.					
FRAC. DIM. ± 1/64			REMOVE ALL BURRS AND SHARP EDGES					
ANGULAR DIM. ±								

1	GPT 40K	MODE SWITCH	7-6-60
REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.
USED ON			

5	1	NT129-1032-4	NUT, ROUND, SWAGE TYPE	
REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.081		
STOCK SIZE			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
ALUMINUM			BRACKET, LOAD RESISTOR MOUNTING	
MATERIAL				
5052-H-32			J.C. Biele	
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED
5404-IRIDITE				
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	
				MS-2319 A