


REQ. PER UNIT	USED ON			MS-2332	A
	MODEL	ASS'Y. NO.	DATE		
1	AFC-1		7-22-60		



MOUNTED IN C HOLES

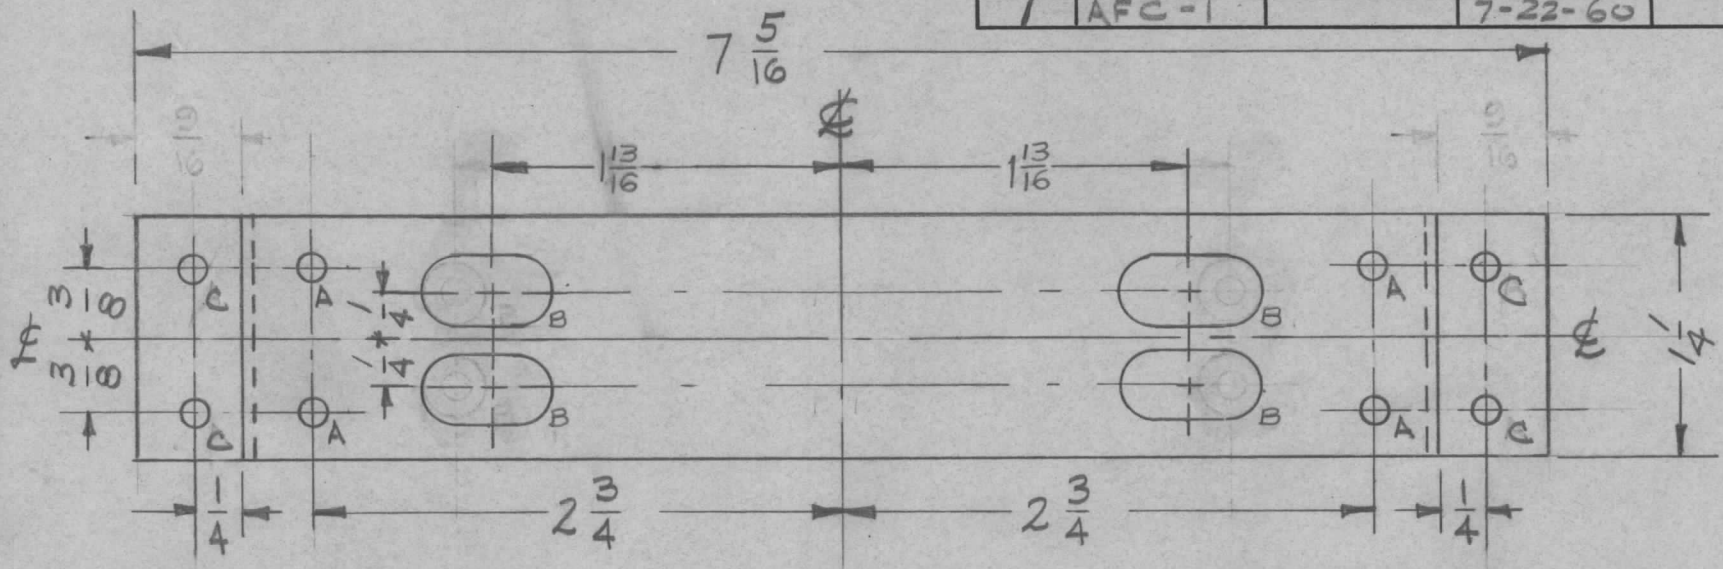

A -  $\frac{9}{64}$  DIA 4 REQ  
 B -  $\frac{3}{8} \times \frac{3}{4}$  SLOTS 4 REQ  
 C -  $\frac{.191}{.194}$  D (NT-129-032-4) 4 REQ

A -  $\frac{9}{64}$  (.140) DIA 3 REQ  
 B -  $\frac{3}{8} \times \frac{3}{4}$  SLOTS 4 REQ

CUT HERE  
 2-66  
 GUARANTEED  
 UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES AND INCLUDE  
 CHEMICALLY APPLIED OR PLATED FINISHES  
 DECIMALS  
 .X ± .05  
 .XX ± .01  
 .XXX ± .005  
 FRACTIONS  
 ± 1/64  
 ANGLES  
 ± 0° 30'

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL									
4	1	NT-129-032-4	SWAGE NUT, ROUND TYPE										
			<b>THE TECHNICAL MATERIEL CORP.</b>										
			<b>MAMARONECK, NEW YORK</b>										
A	2	ITEM 1 ADDED 1 13/16 WAS 2	ALUMINUM	BRACKET, FILTER									
A	1	"B" SLOTS WERE 5/16D											
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.						
TOLERANCES		SCALE: $\frac{1}{2}$		5052-H32		<del>TORILLO</del> <i>file</i>		<i>AMB</i>					
DEC. DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		TYPE & TEMPER		HEATTREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL	
FRAC. DIM. ±				S40A YEL. IRIDITE				<i>JPM</i>					
ANGULAR DIM. ±				FINISH & SPEC. NO.		ELEC. DES. APP		MECH. DES. APP					
										MS-2332		A	