


REQ. PER. UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	GPT 40K	DC-100	8-9-60

MS-2360 A

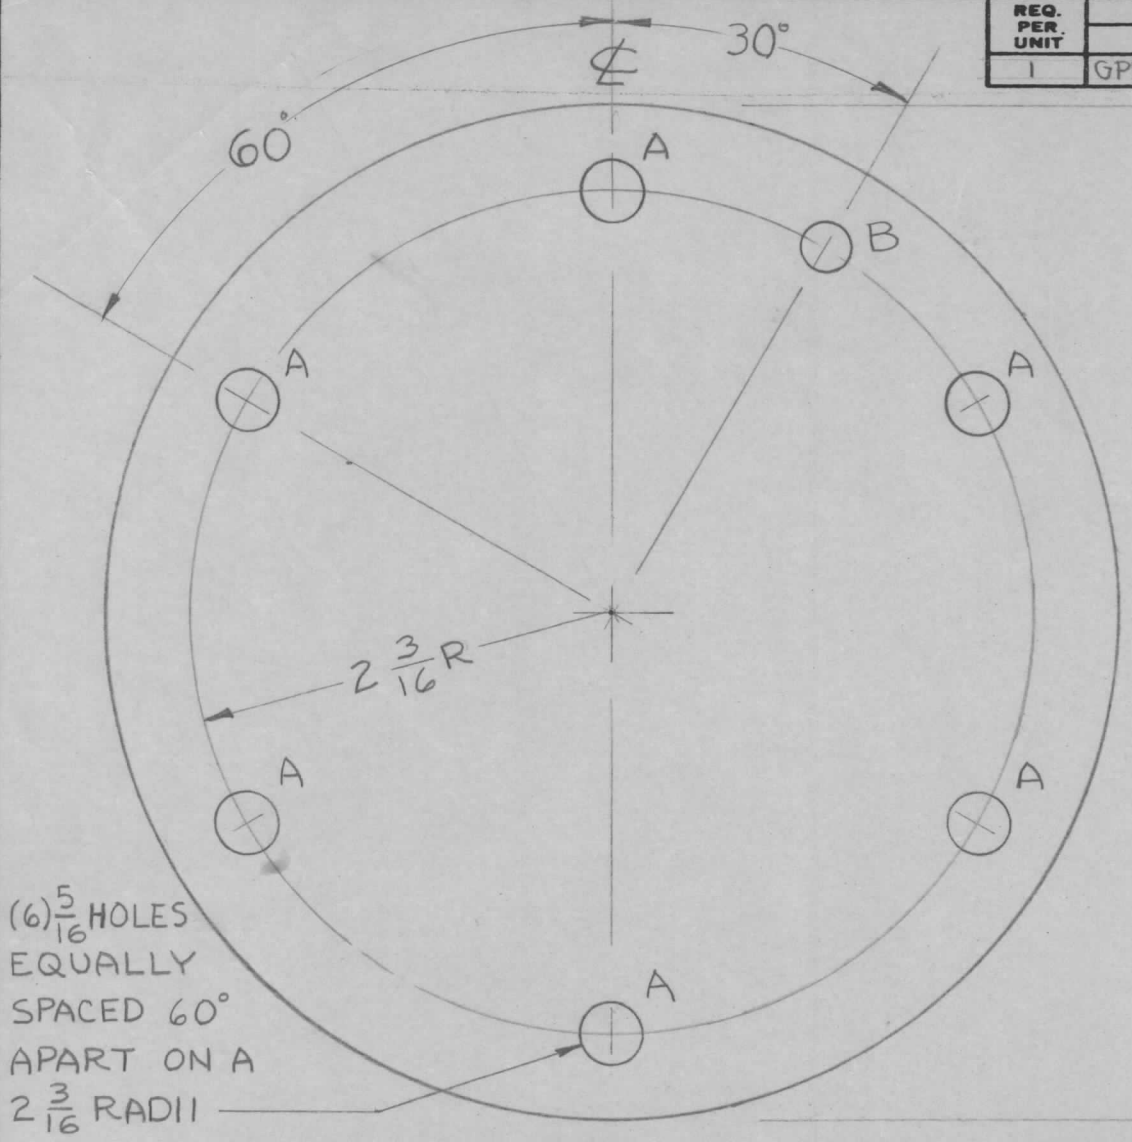

A $\sqrt{\frac{13}{32}}$ DIA. 6 REQ.

B $\sqrt{\frac{1}{4}}$ DIA. 1 REQ.

(6) $\frac{5}{16}$ HOLES
EQUALLY
SPACED 60°
APART ON A
 $2 \frac{3}{16}$ RADII

								REQ.	ITEM	PART NO.	DESCRIPTION		SYMBOL				
								1/8 THK		THE TECHNICAL MATERIEL CORP.							
								STOCK SIZE		MAMARONECK, NEW YORK							
								ALUMINUM		PLATE DC-100							
								MATERIAL									
								5052-H32		Cus File							
								TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL	
								S-404 YELL. IRIDITE						MS-2360 A			
								FINISH & SPEC. NO.		ELEC. DES. APP		MECH. DES. APP					
ISSUE				CHANGED FROM				DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.					
A 1				"A"-HOLE WAS 5/16 DIA				1.21.65	13328	hbs	@	80					
TOLERANCES				SCALE: FULL													
DEC. DIM. ±				MAXIMUM ALLOWABLE TOLERANCES HAVE													
FRAC. DIM. ± 1/64				BEEN DETERMINED AND ANY DEVIATIONS													
ANGULAR DIM. ±				WILL BE CAUSE FOR REJECTION.													
				REMOVE ALL BURRS AND SHARP EDGES													