REQ. PER UNIT	USED ON			MS-2417	C
	MODEL	ASS'Y. NO.	DATE		
1	CHG-1	OVEN/OSC	9-16-60		

A ~ $\frac{.161}{.164}$ D. HOLE'S 2 REQ.

B ~ $\frac{1}{4}$ DIA. HOLE'S 3 REQ.

C ~ $\frac{1}{8}$ DIA. 1 REQ

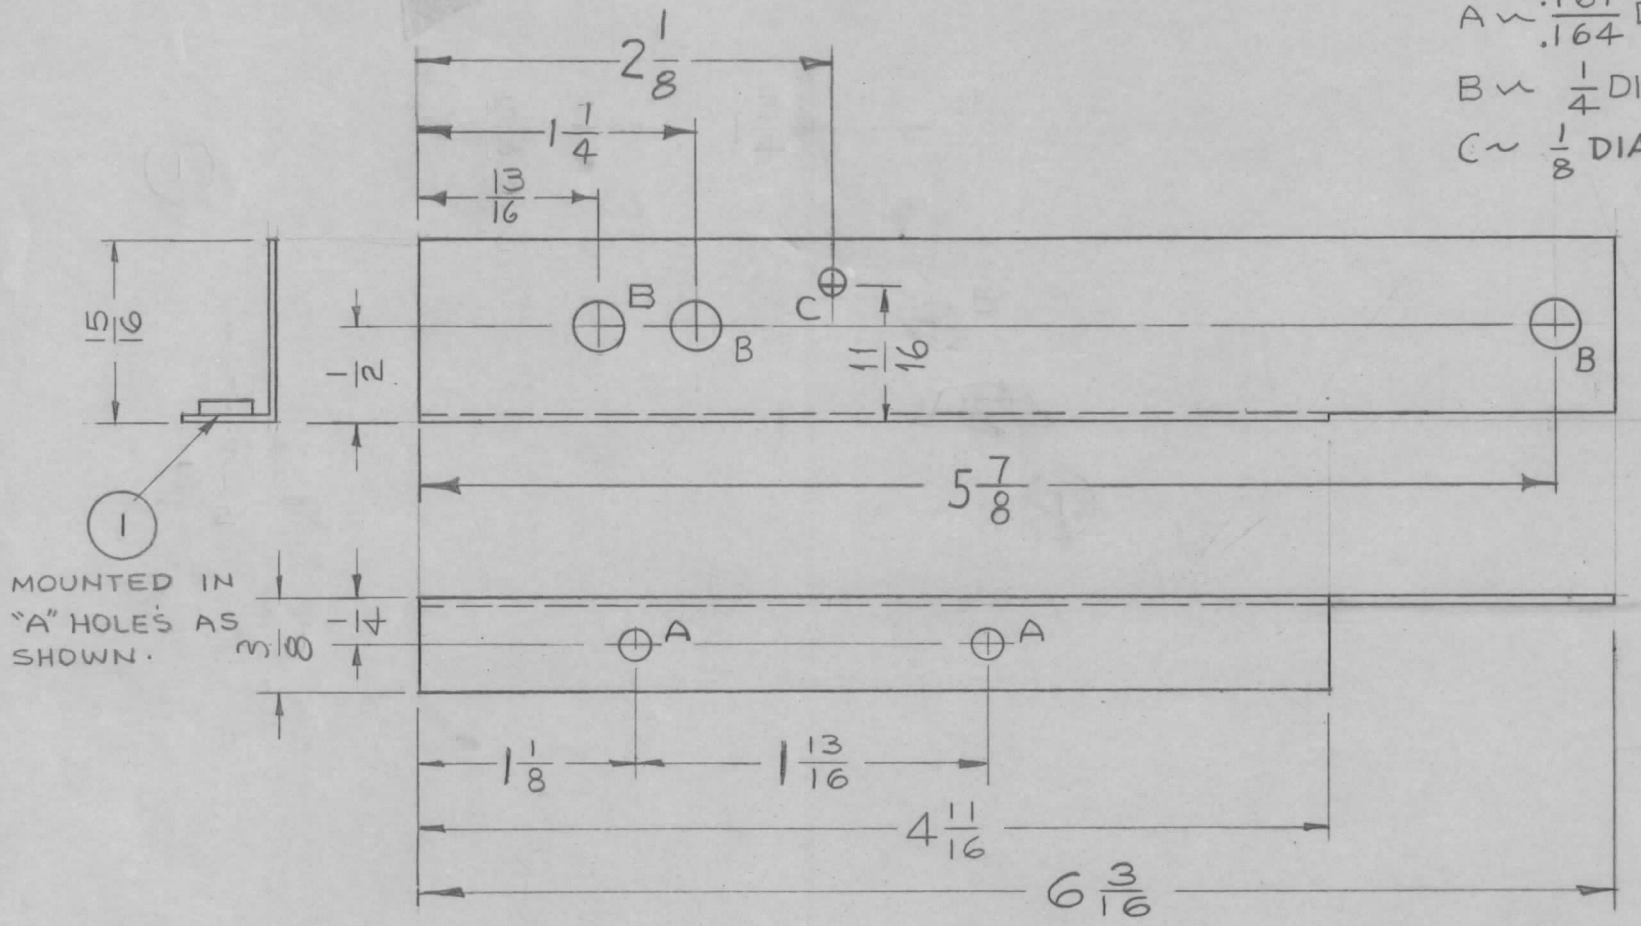

REF: LD 849 (1)

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	1	NT-129-440-4	NUT ROUND SWAGE TYPE	

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C	2	① 'C' Hole Added	11-22-60	3540	DM	JCB	
	1	3/8 Dim was 1/2					
B	1	DIM 13/16 WAS 15/16, 1 1/4 WAS 1 7/16	11-3-60	3378			
A	2	ONE "B" HOLE ADDED	10-12-60	3179			
	1	ONE "B" HOLE RELOCATED					

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

SHIELD, OSC CHASSIS

.051 — STOCK SIZE

ALUMINUM — MATERIAL

5052-H32 — TYPE & TEMPER

HEAT TREAT. SPEC.

S-404 YELLOW IRDITE — FINISH & SPEC. NO.

DRAWN: CM

CHECKED: JWde

FINAL APPROVAL: JCB

ELEC. DES. APP.

MECH. DES. APP: JCB

MS-2417 C

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE: FULL

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

FORM 108-A