
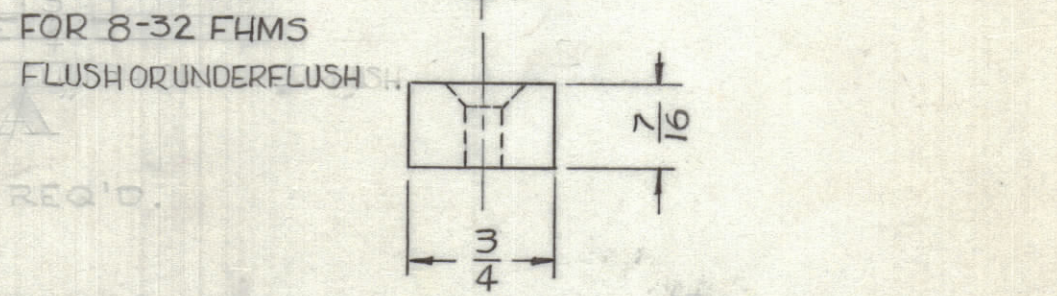
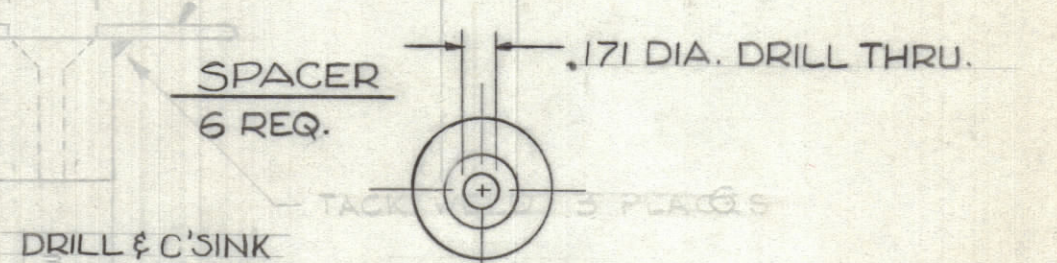


NOTE:  
WELD ALL CORNERSUSH  
& GRIND SMOOTH FLUSH  
FOR #8-32 FHMS

A-3/8 DIA. AIL 6 REQ  
B-11/64 D 4 REQ

DETAIL "A"  
SPACER MOUNTED  
AS SHOWN ON ALL  
"A" HOLES

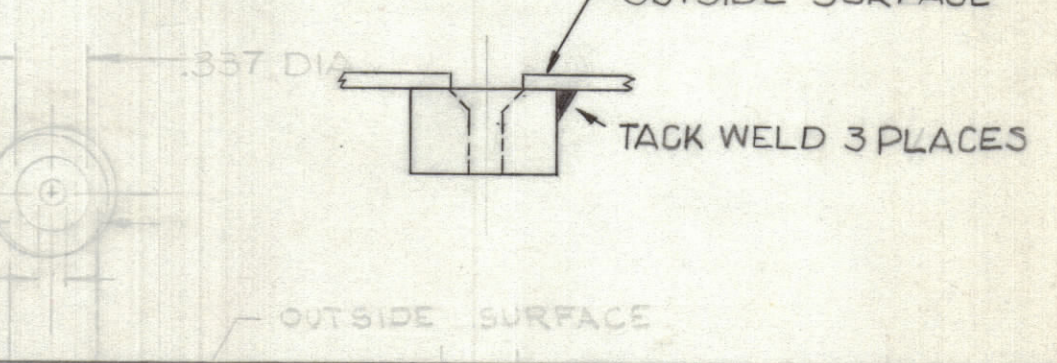

NOTE  
USE MATERIAL THICKNESS FOR MAX. RADIUS  
ON ALL BENDS UNLESS OTHERWISE SPECIFIED

FINISH NOTE: ALL SURFACES  
S-404 YELLOW IRIDITE  
S-114 ZINC CHROMATE PRIMER  
S-220 RCAF BLUE GRAY ENAMEL  
(OR PRIME & PAINT TO CUST SPEC.)

NOTE  
USE MATERIAL THICKNESS FOR MAX. RADIUS  
ON ALL BENDS UNLESS OTHERWISE SPECIFIED

SEE "A" DETAIL

SEE DETAIL "A"

spare cover (req)  
OR. nylon cover  
with cover inside

FINISH NOTE: ALL SURFACES  
S-404 YELLOW IRIDITE  
S-114 ZINC CHROMATE PRIMER  
S-220 RCAF BLUE GRAY ENAMEL  
(OR PRIME & PAINT TO CUST SPEC.)

C'SINK (FLUSH  
OR UNDERFLUSH)  
FOR # 8-32 FHMS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'
<b>TOLERANCES</b>	

CUT HERE  
QUANTITY  
2-8-61

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	16 GA STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	COLD STEEL	PANEL, REAR	
	COLD ROLL		
	TYPE & TEMPER	HEAT TREAT. SPEC.	
	SEE FINISH NOTE		
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
		SHEET	OF

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES							
TOLERANCES ON FRACTIONS ± 1/64    DECIMALS ± .005    ANGLES ± 1/2°							
SCALE: "DO NOT SCALE"							
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES							

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	ACU			4-12-61