REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS-2433	Ø
9	QDP-6S17		9 - 21 - 60		

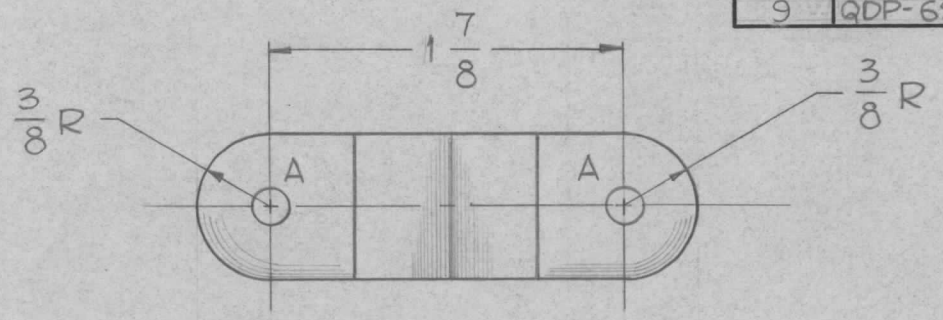

A ~ 9/32 DIA. 2 Req.

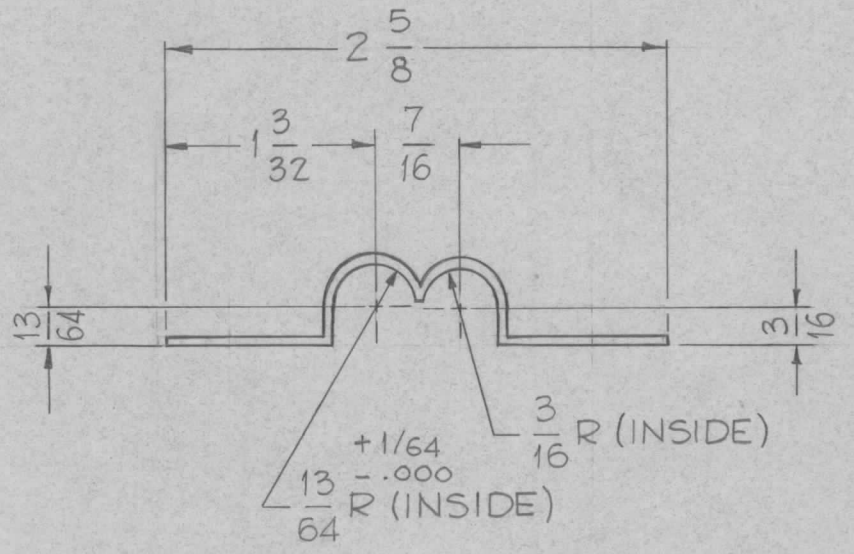

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	TOLERANCES	FRACTIONS
.X ±.05 .XX ± .01 .XXX ±.005		± 1/64 ANGLES ± 0° 30′

CUT HERE GUARANTEED 2-66

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		ORIGINAL RELEASE	9/26/69		CW		

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± AS SHOWN
ANGULAR DIM. ±

SCALE: FULL ~ DO NOT SCALE~

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.064 THICK	STOCK SIZE	
		ALUMINUM	MATERIAL	
		5052-H32	TYPE & TEMPER	HEAT TREAT. SPEC.
		S404 - IRIDITE	FINISH & SPEC. NO.	

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

BRACKET, CABLE SUPPORT BAR

DRAWN	CHECKED	FINAL APPROVAL
J.C. Biele		9/26/69
ELEC. DES. APP.	MECH. DES. APP.	MS-2433 Ø