


REQ. PER UNIT	USED ON			MS-2462	B
	MODEL	ASS'Y. NO.	DATE		
1	TIS-3		10-24-60		

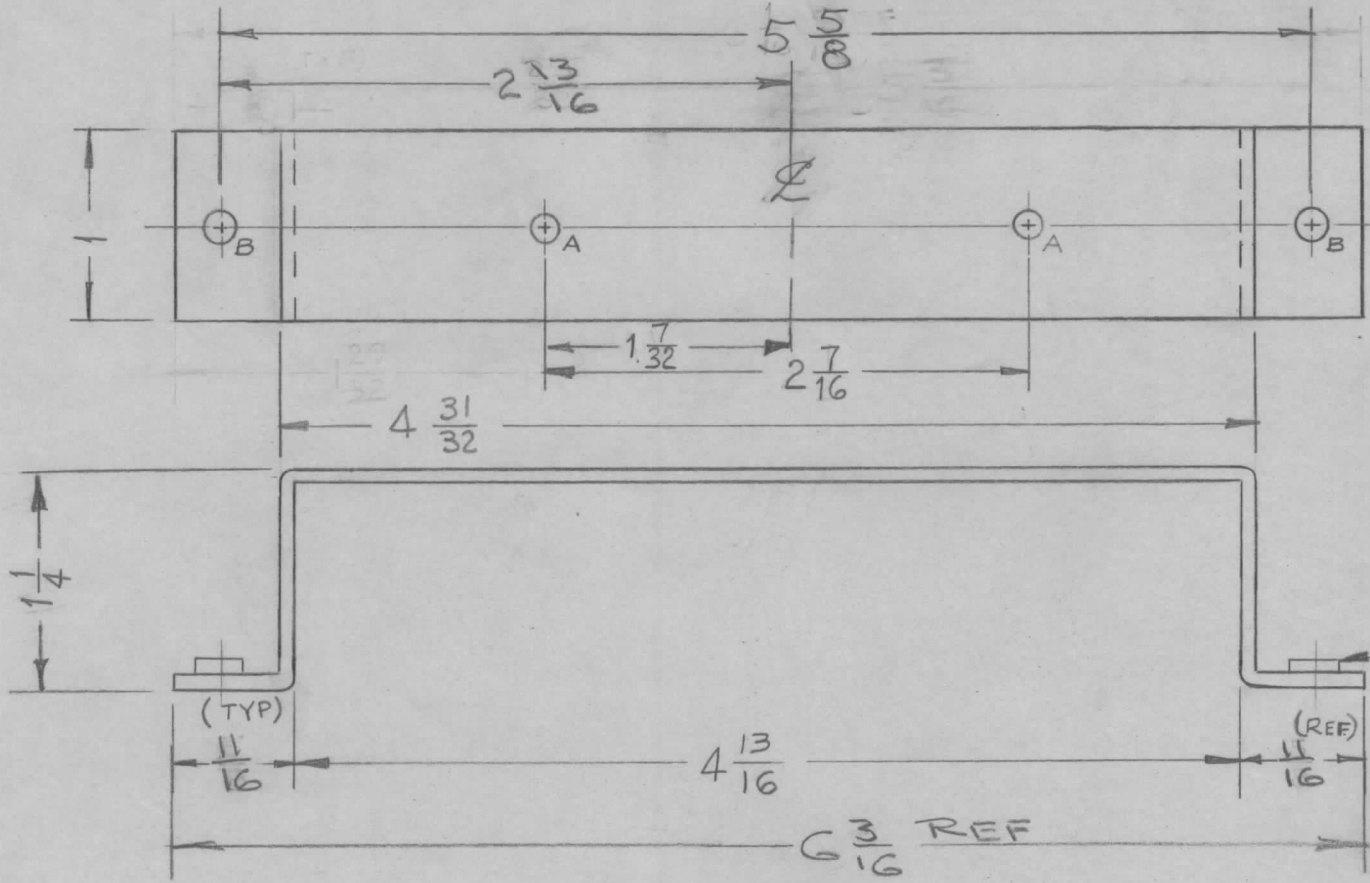

A ~ $5/32$ DIA. 2 REQ.
 B ~ $191-194$ DIA. 2 REQ.
 (FROM 129-632-4)

① MOUNTED IN ALL "B" HOLES AS SHOWN AFTER FINISHING

		2	1	NT-129-632-4	NUT ROUND, SWAGE TYPE		
B	1	4 $31/32$ DIM. ADDED	10-9-62	7397	RF	JLD	
A	3	2 $7/16$ DIM WAS 2 $1/2$	1-11-61	3872	W.A.F.	JCS	
	2	1 $7/32$ DIM. WAS 1 $1/4$					
	1	1 $1/4$ DIM. WAS 1 $1/8$					
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: (DO NOT SCALE)				
DEC. DIM. \pm			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
FRAC. DIM. \pm $1/64$							
ANGULAR DIM. \pm							
		5052-H32			RF	JLD	M.Hay
		TYPE & TEMPER	HEATTREAT. SPEC.		DRAWN	CHECKED	FINAL APPROVAL
		YELLOW IRIDITE			RF	JLD	
		FINISH & SPEC. NO.	ELEC. DES. APP		MECH. DES. APP		MS-2462 B