


REQ. PER. UNIT	USED ON			MS-2470	A
	MODEL	ASS'Y. NO.	DATE		
2	GPT-40K	AX-239	11-3-60		
1	SBG-1L	RAK-20	12-19-61		

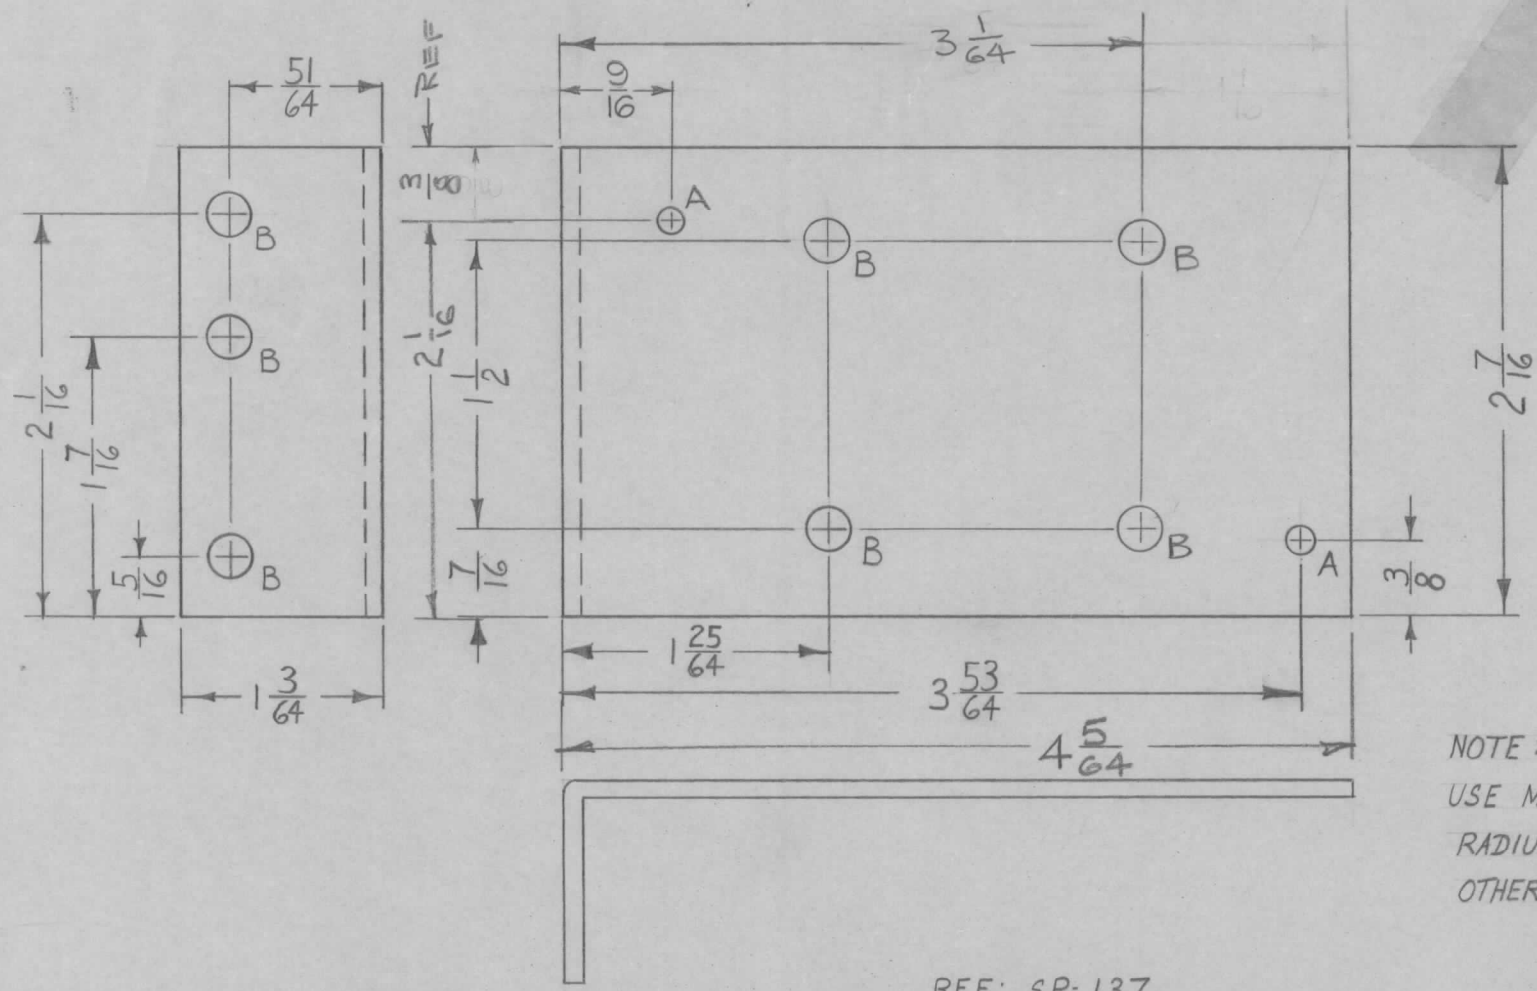

NOTE:
USE MATERIAL THICKNESS FOR MAX. RADIUS ON ALL BENDS UNLESS OTHERWISE SPECIFIED.

REF: SP-137

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL				
								.081		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK BRACKET, SPRING MOUNTING	A				
								STOCK SIZE							
								ALUMINUM							
A	2	ADDED ONE (A) HOLE ADDED TWO (B) HOLES	6-6-62	6779	V.R.R.	<i>[Signature]</i>	RK								
								MATERIAL							
								5052-H32		<i>[Signature]</i>	<i>[Signature]</i>				
TOLERANCES			SCALE:												
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES												
FRAC. DIM. ± 1/64															
ANGULAR DIM. ±															
								TYPE & TEMPER	HEATTREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL			
								S404 YELL IRIDITE				MS-2470	A		
								FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP				