


REQ. PER. UNIT	USED ON			MS-2486
	MODEL	ASS'Y. NO.	DATE	
3	APP-4		12-5-60	

A - $\frac{13}{64}$ DIA. 1 REQ.

B - $\frac{13}{64} \times \frac{13}{32}$ SLOT 1 REQ.

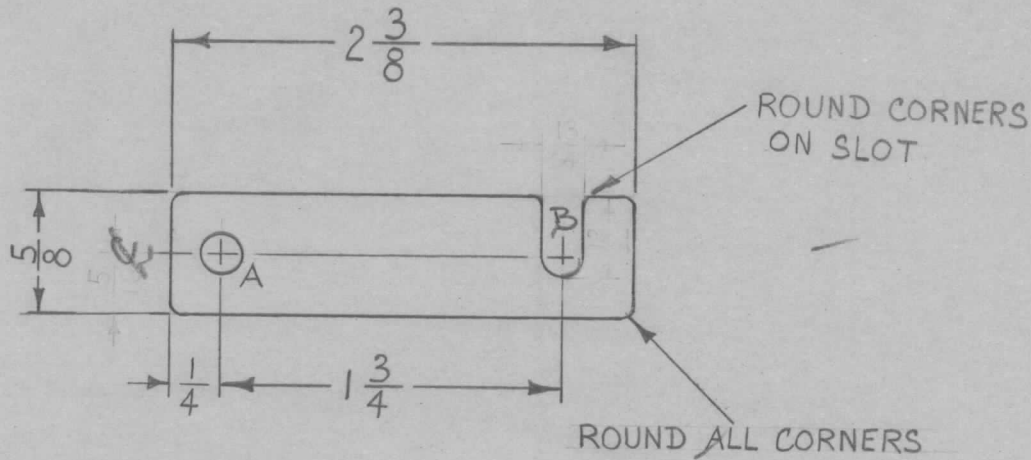

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° 30'

TOLERANCES

CUT HERE
GUARANTEED
2-56

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL												
		18 GAGE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	BUS BAR, SWITCHING												
		STOCK SIZE														
		COPPER														
		MATERIAL														
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	COMM. H		<i>M.A.F.</i>	<i>Jude</i>	<i>SPM</i>				
TOLERANCES			SCALE:					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					S135 NICKEL PL.		<i>RK</i>	<i>SPM</i>	MS-2486				
FRAC. DIM. ±													FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP	
ANGULAR DIM. ±																