

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES AND INCLUDE
 CHEMICALLY APPLIED OR PLATED FINISHES


DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° 30'

TOLERANCES

CUT HERE
 GUARANTEED
 2-66


REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
2	APP-4		12-5-60

MS-2488

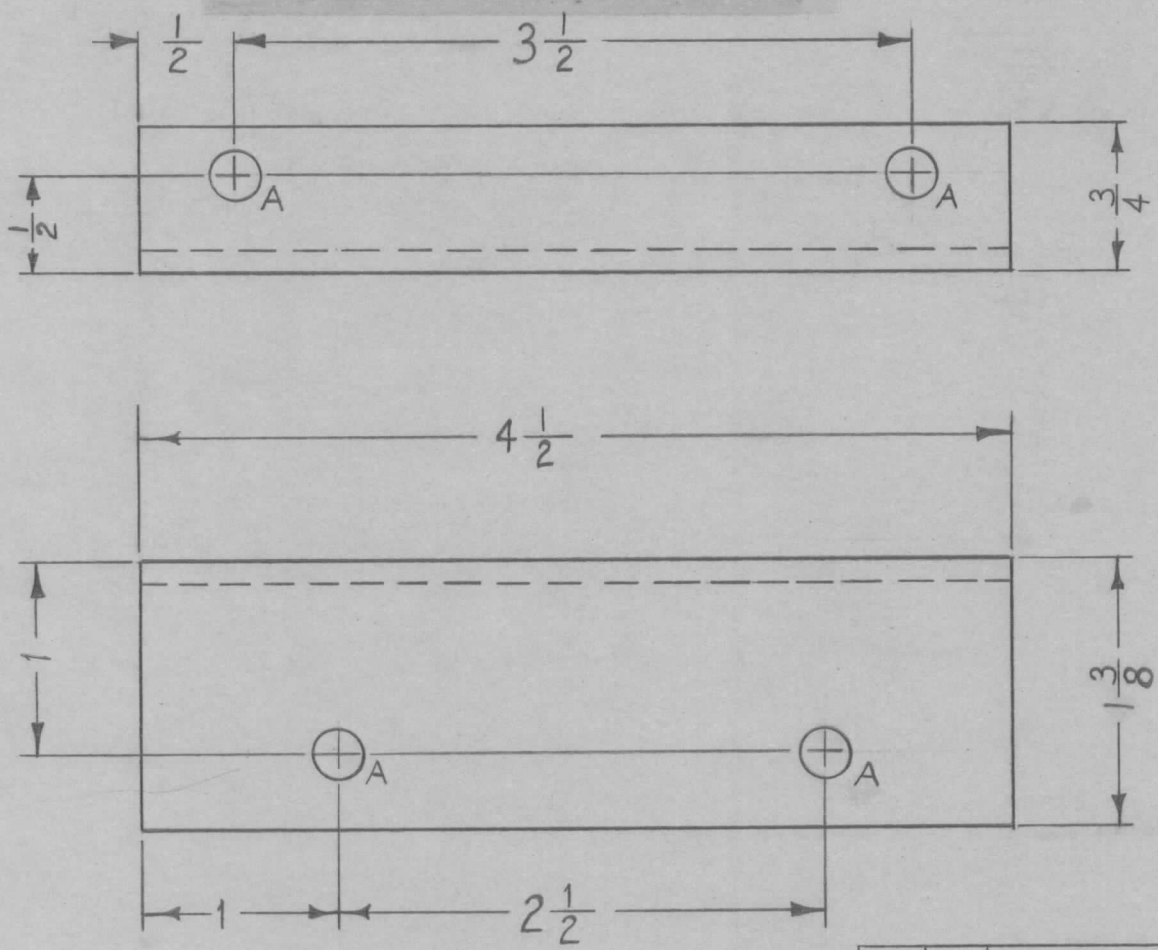

A~.251-.254 DIA. 4 REQ.

NOTE:
 USE MATERIAL THICKNESS FOR
 MAX. RADIUS ON ALL BENDS
 UNLESS OTHERWISE SPECIFIED.

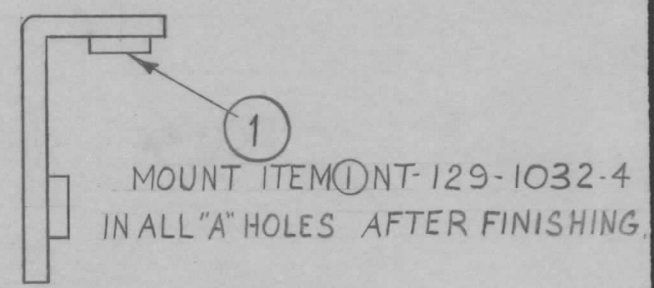

4	1	NT-129-1032-4	NUT, ROUND, SWAGE TYPE										
REQ.	ITEM	PART NO.	DESCRIPTION		SYMBOL								
		1/8	THE TECHNICAL MATERIEL CORP.										
		STOCK SIZE	MAMARONECK, NEW YORK										
		ALUMINUM	BRACKET, MOUNTING										
		MATERIAL	POWER INPUT ASSY										
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	5052-H32	PK	MS-2488			
TOLERANCES			SCALE: +			TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			S404 YELL. IRIDITE		ELEC. DES. APP		MECH. DES. APP			
FRAC. DIM. ±						FINISH & SPEC. NO.							
ANGULAR DIM. ±													