


REQ. PER. UNIT	USED ON			MS-2526
	MODEL	ASS'Y. NO.	DATE	
1	TER-3500-300		2-6-61	

HOLES REQ.
 A ~ 9/32 DIA 1
 B ~ 8-32 C'SINK 1
 C ~ 9/64 DIANCE 1

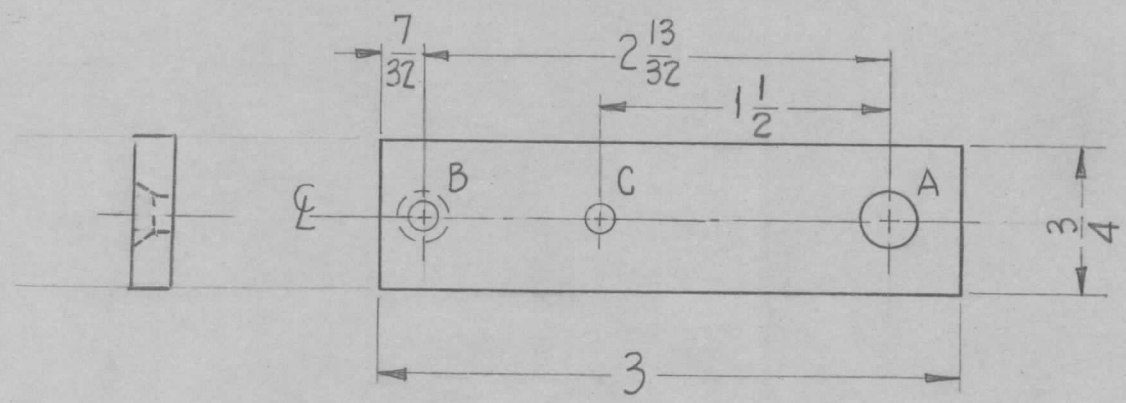

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES AND INCLUDE
 CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30'

CUT HERE
 GUARANTEED
 2-66

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL							
		.081	THE TECHNICAL MATERIEL CORP.								
		STOCK SIZE	MAMARONECK, NEW YORK								
		ALUMINUM	PLATE, MOUNTING, SPARK GAP								
		MATERIAL									
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	DRAWN	CHECKED	FINAL APPROVAL	
TOLERANCES			SCALE:					<i>D. J. [Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>	
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE			TYPE & TEMPER		HEAT TREAT. SPEC.			
FRAC. DIM. ±			BEEN DETERMINED AND ANY DEVIATIONS			S-404 YELLOW					
ANGULAR DIM. ±			WILL BE CAUSE FOR REJECTION.			IRIDITE					
			REMOVE ALL BURRS AND SHARP EDGES			FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP	MS-2526	