


REQ. PER. UNIT	USED ON			MS-2527
	MODEL	ASS'Y. NO.	DATE	
3	SBT-350		2-7-61	

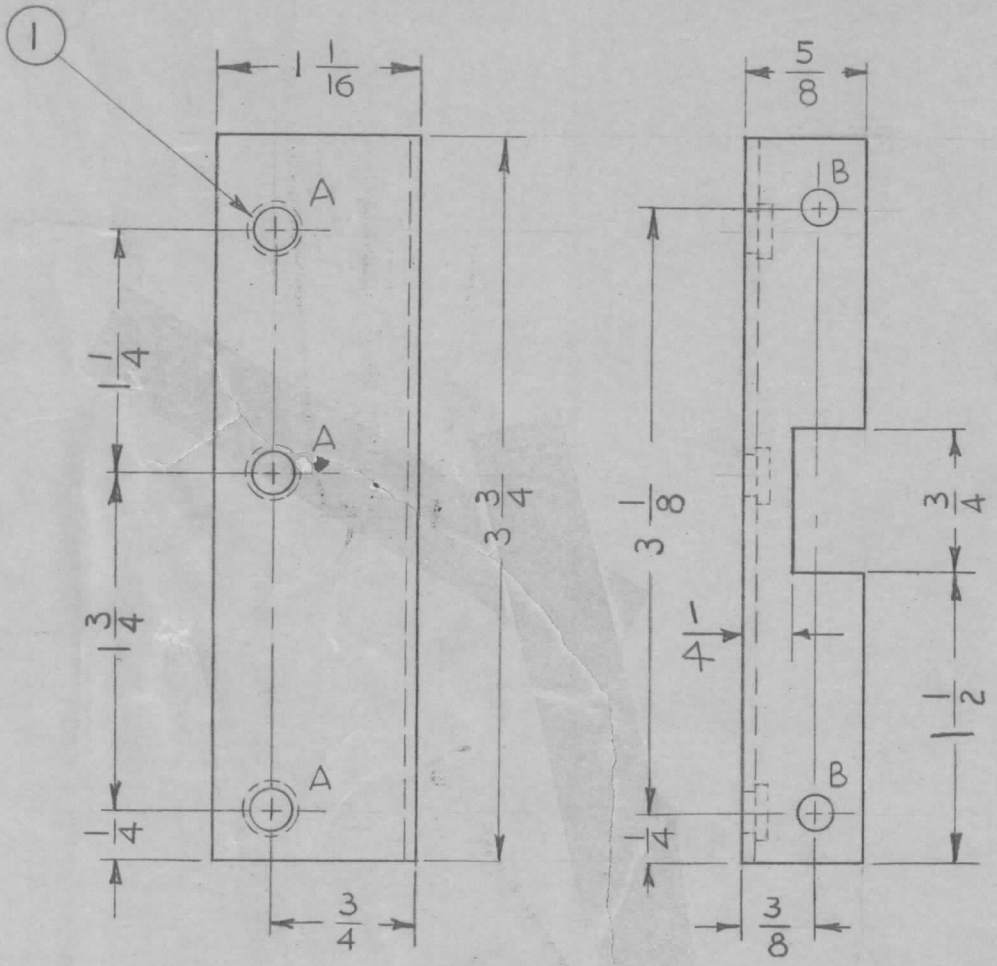

HOLES -  
 A - .224 DIA. 3 Req.  
 .221  
 B - 3/16 DIA. 2 Req.

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES AND INCLUDE  
 CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30'

CUT HERE  
 GUARANTEED  
 2-66

							3	1	NT-129-832-4	NUT, ROUND, SWAGE TYPE				
							REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL			
										THE TECHNICAL MATERIEL CORP.				
										MAMARONECK, NEW YORK				
										SPRING, MOTOR				
										MOUNTING BRACKET				
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	5052-H32		Detmer J De Ron Koh				
TOLERANCES							SCALE:		TYPE & TEMPER		DRAWN	CHECKED	FINAL APPROVAL	
DEC. DIM. ±							MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		S404 YELLOW IRIDITE		RK		MS-2527	
FRAC. DIM. ±									FINISH & SPEC. NO.		ELEC. DES. APP			MECH. DES. APP
ANGULAR DIM. ±														