



REQ. PER UNIT	USED ON			MS-2550
	MODEL	ASS'Y. NO.	DATE	
1	ACU		4-15-61	

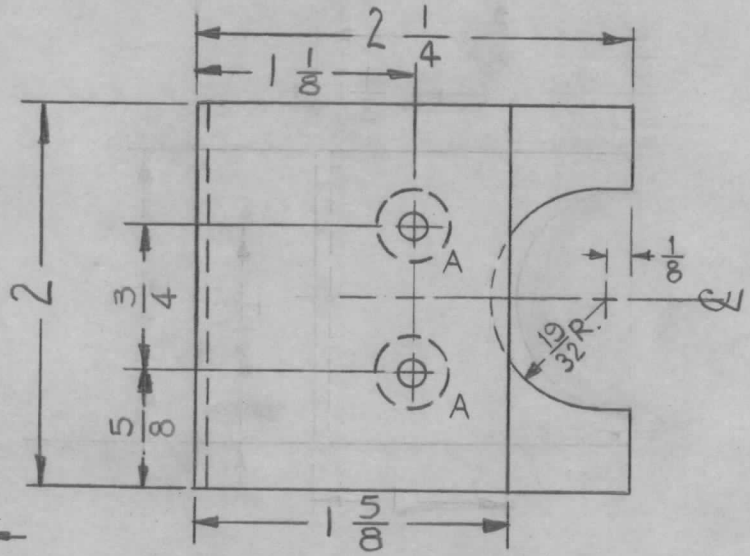

A ~ .221 - .224 DIA. 2 REQ.  
 B ~ 1/4 DIA. 3 REQ.  
 C ~ .161 MIN., .164 MAX. DIA'S. 4 REQ.

USE MATERIAL THICKNESS FOR MAX. RADIUS ON ALL BENDS UNLESS OTHERWISE SPECIFIED

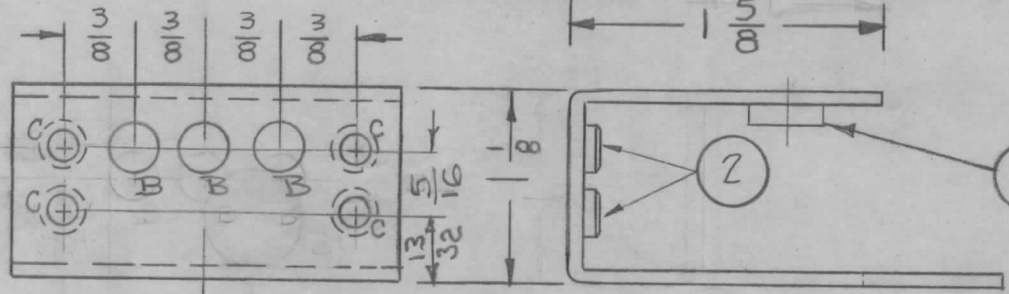

MOUNT ITEM 1 IN ALL "A" HOLES AS SHOWN AFTER FINISHING

MOUNT ITEM 2 IN ALL "C" HOLES AS SHOWN AFTER FINISHING

REF - TMC DWG. NO. LD-910

4	Z	NT-129-440-4	NUT, ROUND, SWAGE TYPE	
2	1	NT-129-832-4	NUT, ROUND, SWAGE TYPE	
REQ. ITEM	PART NO.		DESCRIPTION	SYMBOL
.081			THE TECHNICAL MATERIEL CORP.	
STOCK SIZE			MAMARONECK, NEW YORK	
ALUMINUM			BRACKET, THERMOSTAT SUPPORT	
MATERIAL				
5052-H32			WAF	2B
TYPE & TEMPER		HEATTREAT. SPEC.	DRAWN	CHECKED
S404 YELL IRIDITE			aa	MS-2550
FINISH & SPEC. NO.			ELEC. DES. APP	MECH. DES. APP

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: FULL (DO NOT SCALE)				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
FRAC. DIM. ± 1/64			REMOVE ALL BURRS AND SHARP EDGES				
ANGULAR DIM. ±							