



REQ. PER UNIT	USED ON			MS-2556	A
	MODEL	ASS'Y. NO.	DATE		
1	AFC-1B		4-26-61		

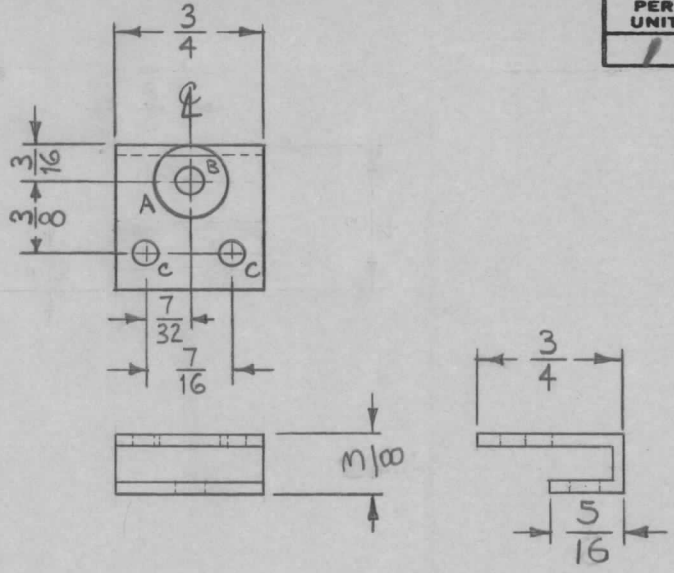

A ~ $\frac{5}{16}$ DIA. 1 REQ.
 B ~ .140 DIA. 1 REQ.
 C ~ .113 DIA. 2 REQ.



ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL	
										.051	THE TECHNICAL MATERIEL CORP.		
										STOCK SIZE	MAMARONECK, NEW YORK		
A	1	3/8 Dim. WAS 5/16 (A) Hole DIA. WAS 3/8, DIM 5/16 WAS 3/8	5-3-61	4831	RU	JCB	X/H			ALUMINUM	SUPPORT, CAPACITOR		
										MATERIAL			
TOLERANCES			SCALE: FULL (DO NOT SCALE)				5052-H32		W.A.F.	JWB			
DEC. DIM. ± FRAC. DIM. ± 1/64 ANGULAR DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED		FINAL APPROVAL	
							S404 YELL. IRIDITE		JCB			MS-2556	A
							FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP			