



REQ. PER. UNIT	USED ON			MS-2608
	MODEL	ASS'Y. NO.	DATE	
1	CHG-2	SYNTH.	6-2-61	



A ~ $\frac{3}{16}$ DIA. 2 REQ.

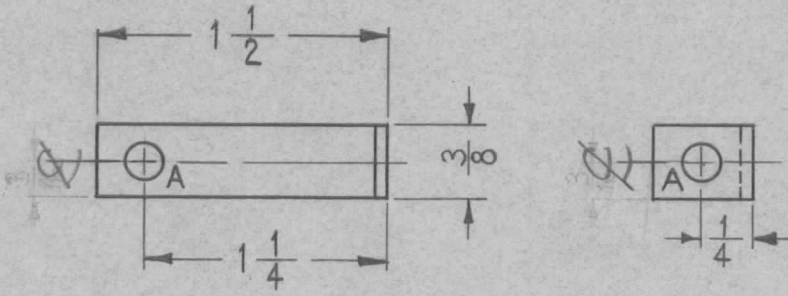

USE MATERIAL THICKNESS FOR MAX. RADIUS ON ALL BENDS UNLESS OTHERWISE SPECIFIED

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL			
								.064		THE TECHNICAL MATERIEL CORP.				
								STOCK SIZE		MAMARONECK, NEW YORK				
								ALUMINUM		BRACKET, COIL ASS'Y.				
								MATERIAL						
								5052-H32		<i>W.A.F.</i>	<i>J.W.</i>			
TOLERANCES			SCALE: FULL (DO NOT SCALE)					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					S404 YELL. IRIDITE		<i>S.D.</i>	<i>W.B.</i>	MS-2608		
FRAC. DIM. ± 1/64								FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP				
ANGULAR DIM. ±														