


| TMC# | A | B | C | D |
|-----------|-------|-------|------|------|
| MS-2630-1 | 1.375 | 2.750 | .040 | .466 |
| MS-2630-2 | 1.125 | 2.500 | .040 | .466 |
| MS-2630-3 | 1.375 | 2.750 | .040 | .562 |
| MS-2630-4 | 1.250 | 2.625 | .040 | .562 |
| MS-2630-5 | 1.125 | 2.500 | .040 | .562 |
| MS-2630-6 | 1.187 | 2.437 | .040 | .466 |
| MS-2630-7 | 1.125 | 2.375 | .040 | .466 |

| REQ. PER. UNIT | USED ON | | |
|----------------|---------|------------|------|
| | MODEL | ASS'Y. NO. | DATE |
| 32 | GPT-40K | AX-267 | |

MS-2630 D

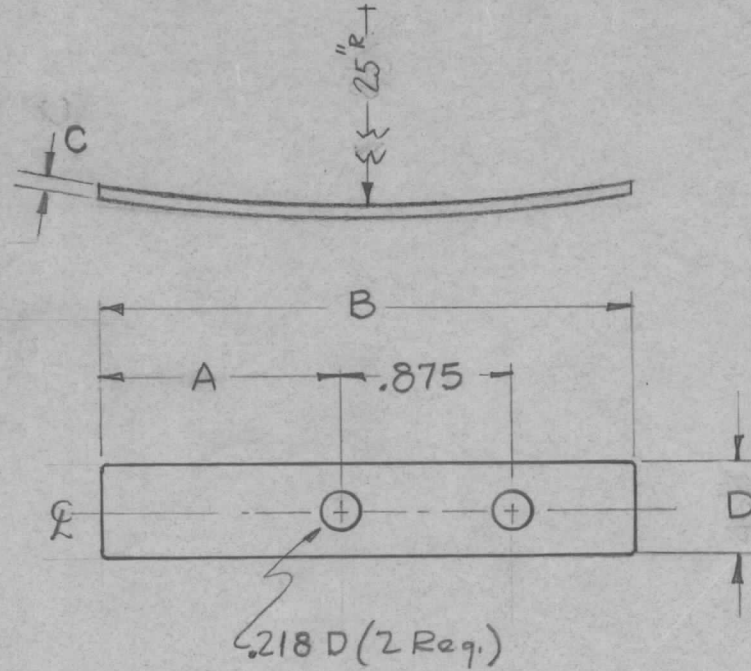

NOTES:
 MUST BE FLAT AFTER HEAT TREATMENT.
 MUST BE BENT AFTER DRILLING.

FINISH~
 S245 SILVER PLATE, BRIGHT.
 S423- IRIDITE, 18-P SILVER- KOTE

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES AND INCLUDE
 CHEMICALLY APPLIED OR PLATED FINISHES

| DECIMALS | TOLERANCES | FRACTIONS |
|-------------|------------|-----------|
| .X ± .05 | | ± 1/64 |
| .XX ± .01 | | ANGLES |
| .XXX ± .005 | | ± 0° 30' |

CUT HERE
 GUARANTEED
 2-66

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL | | | | | |
|----------------|------|---|-------------------|----------------|----------------|----------------|-----------|--|--|
| D | 1 | MS-2630-3 To 7 ADDED "D" DIM ADDED TO CHART | | | | | | | |
| C | 1 | RADIUS WAS 8-1/2" | | | | | | | |
| B | 1 | On MS-2630-2 @ Was .025 | | | | | | | |
| A | 2 | MS-2630-2 Added @ Column Added | | | | | | | |
| ISSUE | ITEM | CHANGED FROM | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | | |
| TOLERANCES | | SCALE: | | | | | | | |
| DEC. DIM. ± | | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. | | | | | | | |
| FRAC. DIM. ± | | REMOVE ALL BURRS AND SHARP EDGES | | | | | | | |
| ANGULAR DIM. ± | | | | | | | | | |
| | | TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKED | FINAL APPROVAL | | | |
| | | FINISH & SPEC. NO. | | ELEC. DES. APP | MECH. DES. APP | MS-2630 D | | | |