



REQ. PER. UNIT	USED ON			MS-2652 A
	MODEL	ASS'Y. NO.	DATE	

FFR-3 TO FFR-35 MOD.

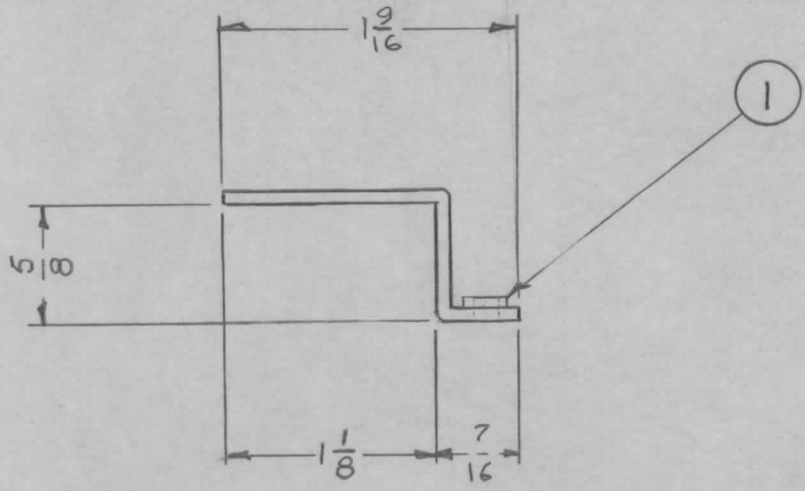

- A -  $\frac{3}{8}$  DIA.
- B -  $\frac{.191}{.194}$  DIA.
- C -  $\frac{9}{64}$  DIA.

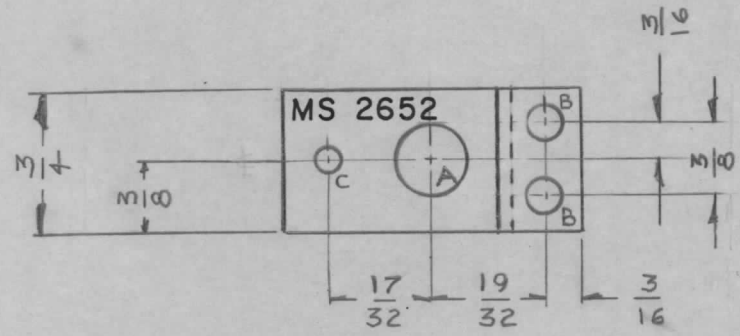

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES AND INCLUDE  
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30'

CUT HERE  
GUARANTEED  
2-66

		2	1	NT-129-632-4	NUT, SWAGE			
		REQ. ITEM	PART NO.		DESCRIPTION			SYMBOL
		.064			THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE			MAMARONECK, NEW YORK			
A 1		DOTTED LINE REVERSED TO CORRECT PICTORIAL			BRACKET, POTENTIOMETER			
		ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
		TOLERANCES			SCALE: FULL			
		DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.			
		FRAC. DIM. ±			REMOVE ALL BURRS AND SHARP EDGES			
		ANGULAR DIM. ±						
		5052-H32		R. LOPEZ		OUB		
		TYPE & TEMPER		HEATTREAT. SPEC.		DRAWN		CHECKED
		YELLOW IRIDITE				MS-2652		A
		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		