



DETAIL A

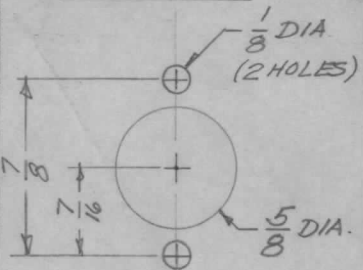

HOLE B = $\frac{5}{16}$ DIA.
HOLE C = .173 DIA.

REQ. PER UNIT	USED ON			MS-2892	B
	MODEL	ASS'Y. NO.	DATE		
1	HFR-1/T	A 2343	4/25/61		

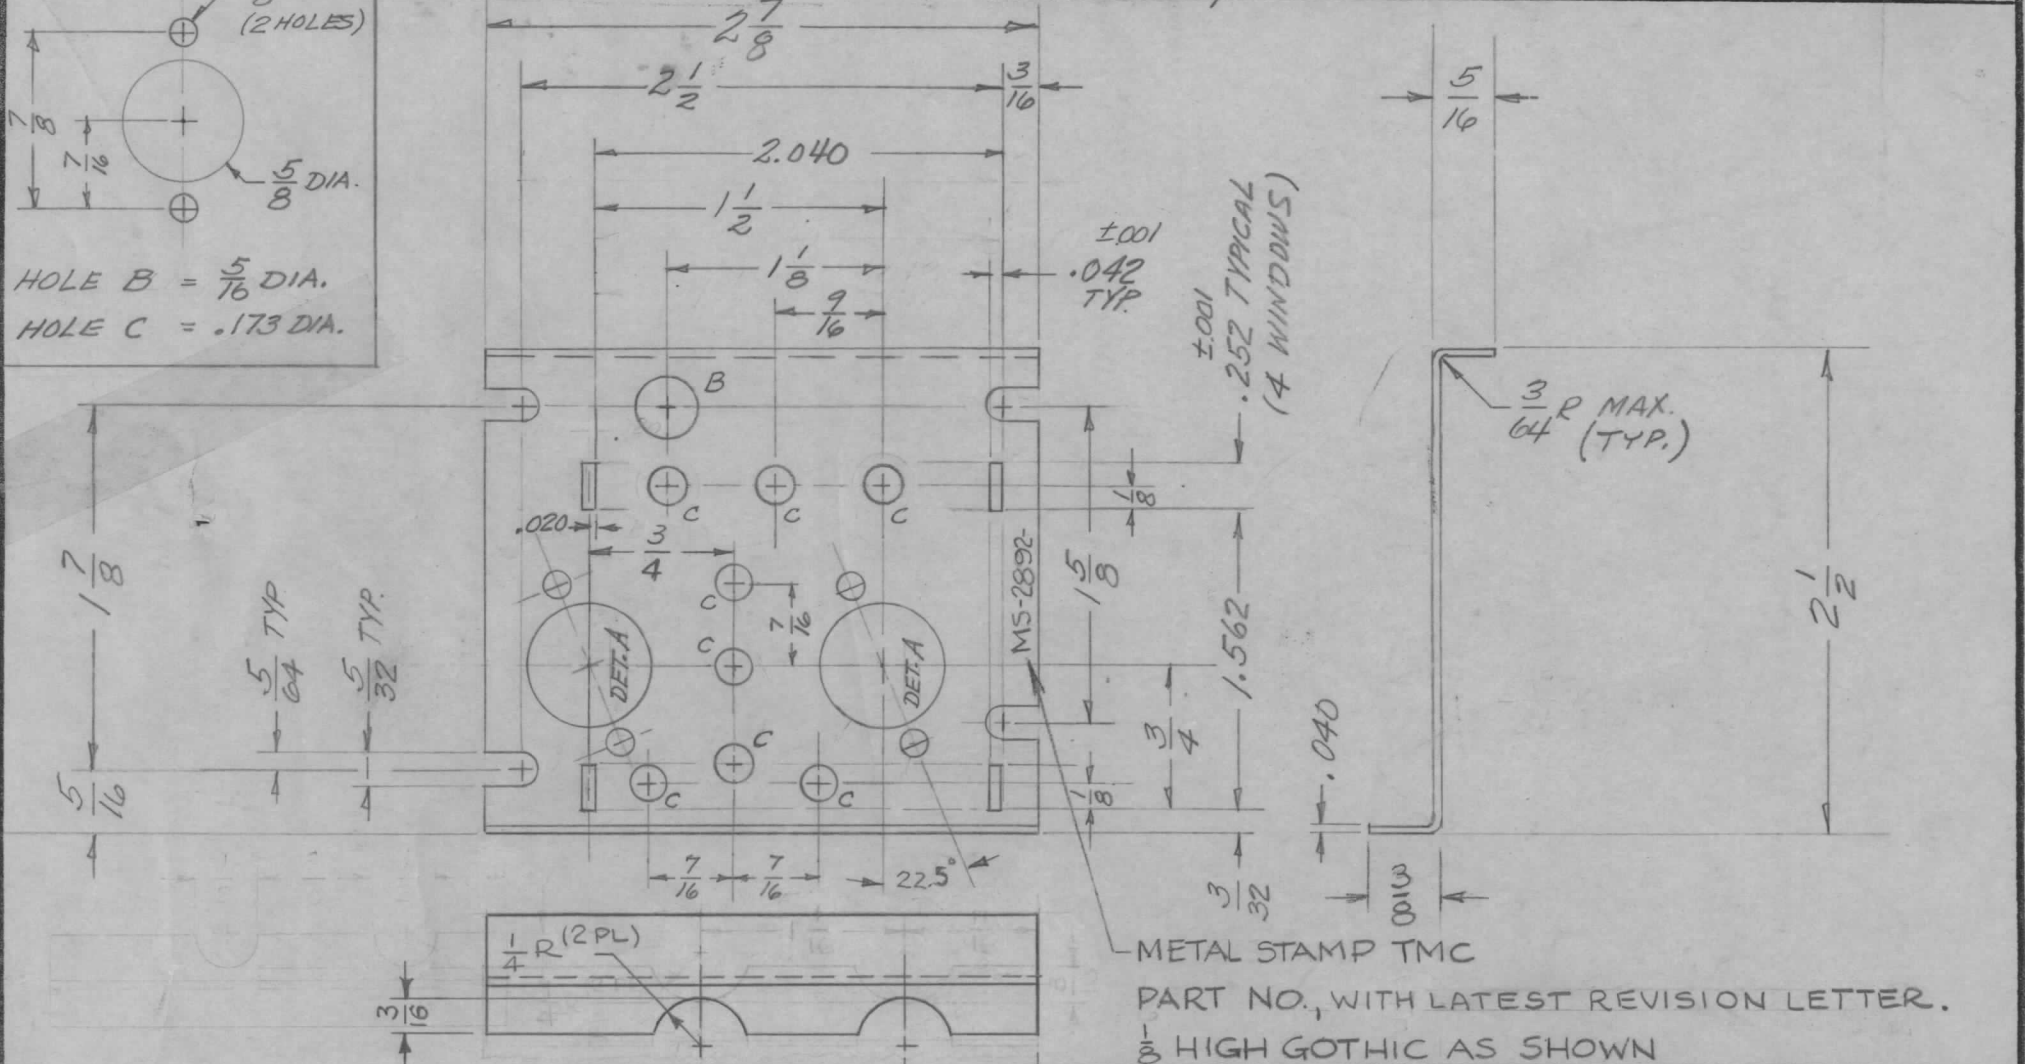

METAL STAMP TMC
PART NO., WITH LATEST REVISION LETTER.
 $\frac{1}{8}$ HIGH GOTHIC AS SHOWN

							PART NO.	DESCRIPTION	SYMBOL	
B	1	1/4R NOTCHES RELOCATED	7.14.64	11829	LOB	@	.040 THK	THE TECHNICAL MATERIEL CORP.		
A	1	NOTCHES ADDED	1/30/64	10822	T.R.		STOCK SIZE	MAMARONECK, NEW YORK		
ISSUE ITEM							MATERIAL		CHASSIS, ELECTRICAL EQUIP. OSC.	
CHANGED FROM							BRASS			
DATE							1/2 HARD		J.A.	
CH. NO.							TYPE & TEMPER		DRAWN	
DRAFTS							HEAT TREAT. SPEC.		CHECKED	
CHECKER							FINISH & SPEC. NO.		ELEC. DES. APP	
ENG. APP.							WATER... ..		MECH. DES. APP	
TOLERANCES							SCALE: 1/1		FINAL APPROVAL	
DEC. DIM. ± .005							MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.		MS-2892	
FRAC. DIM. ± .010							REMOVE ALL BURRS AND SHARP EDGES		B	
ANGULAR DIM. ± .5°										